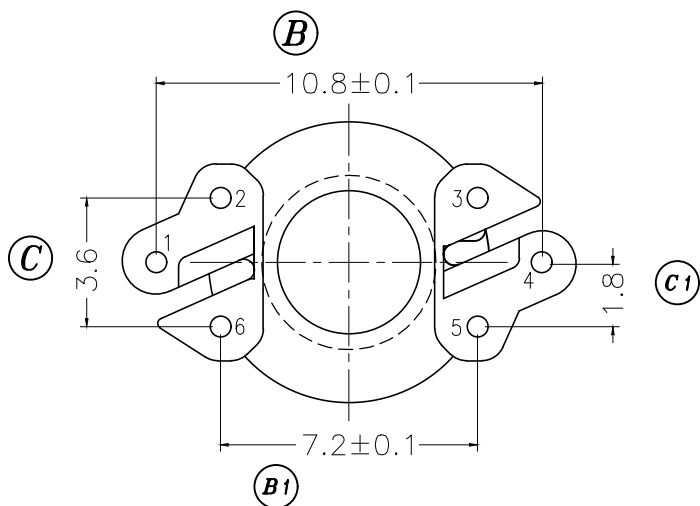
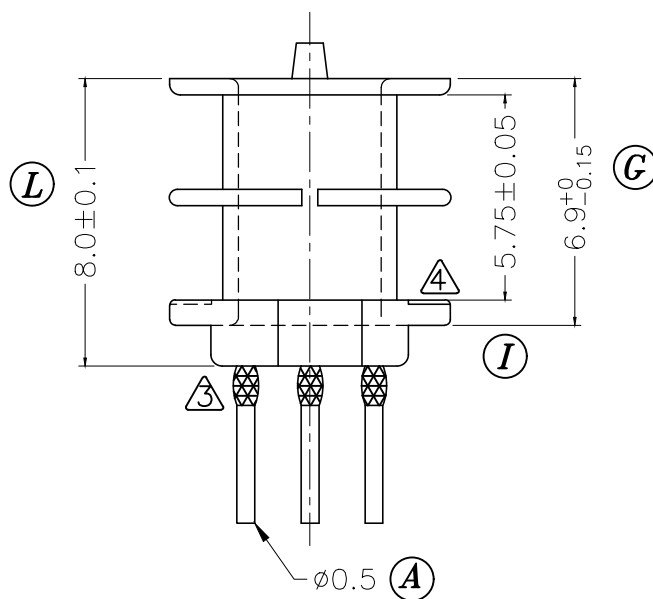
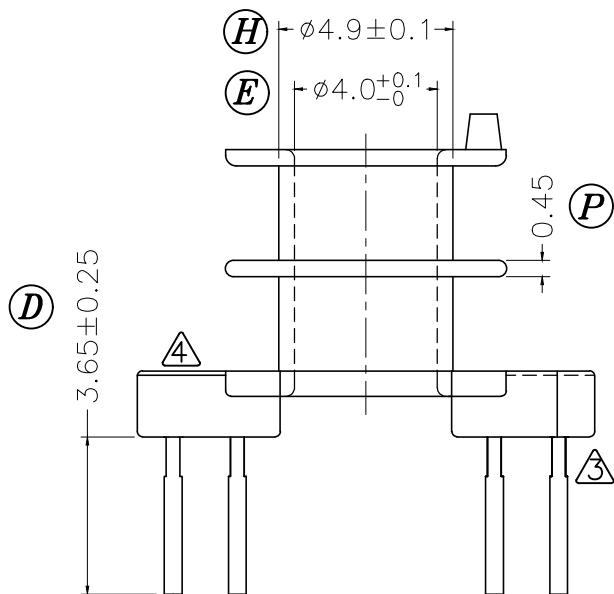
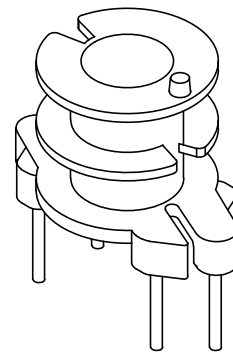
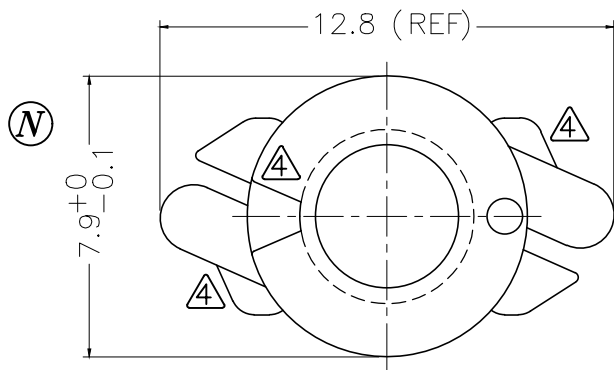


REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(E):4.0+0/-0.1 -> 4.0+0.1/-0; (H):ø4.9+0/-0.1 -> ø4.9±0.1	'02.05.21	3	③ ADD A NICK AT PIN ROOT	'03.10.30
2	CANCEL (O),(M),(Q); PIN TENSION LOAD 1.0 --> 0.8;		4	④ DRAWING CORRECTED	'04.10.07
	UPDATE DRAWING	'03.08.24			

DRAWN & DRAFTED BY	LI XINJIAN	TOLERANCES	ANGLE: ±1°	TITLE: T-H BOBBIN RM-4 (2 SEC)	
CHECKED & APPROVED BY	JOHN RONG	0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	UNIT: MM	BOBBIN MATERIAL: PHENOLIC PM9630	UL REC. UL 94V-0
PIN SHINE INDUSTRIAL CO.,LTD.			ORIGIN: DG	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 0.8KG MIN.
TEL:886-2-22990545 FAX:886-2-22990546				DATE: OCT.07, 2004	DRAWING NO. P-404
					REV. 4