

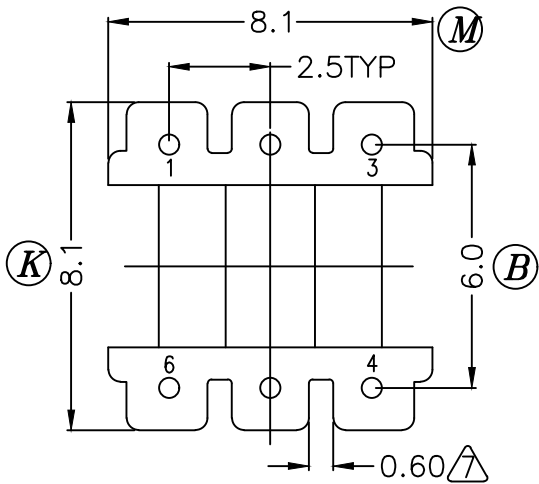
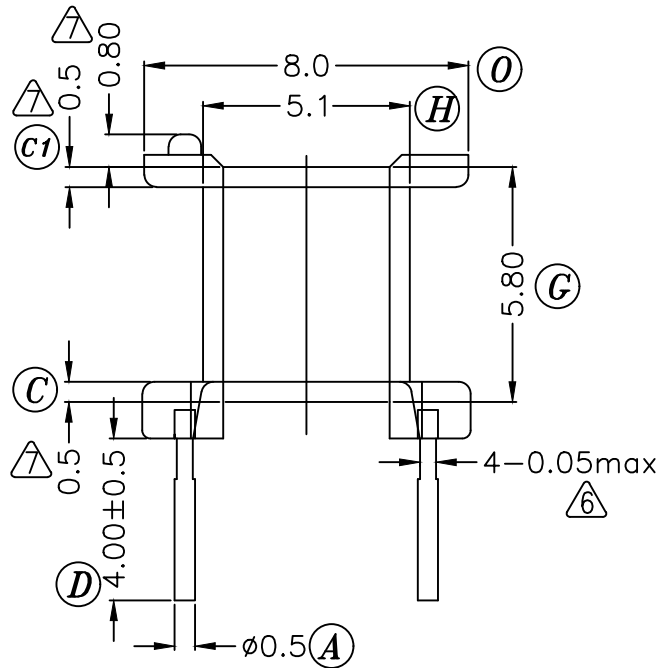
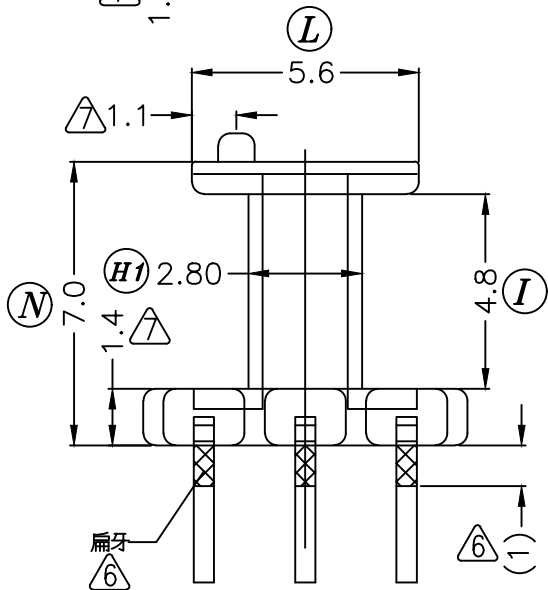
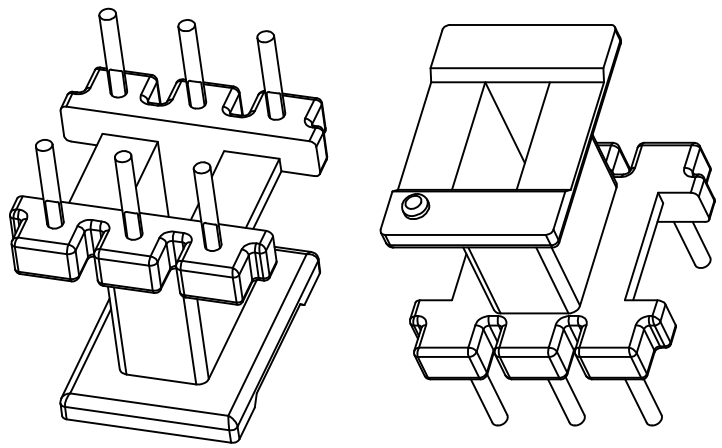


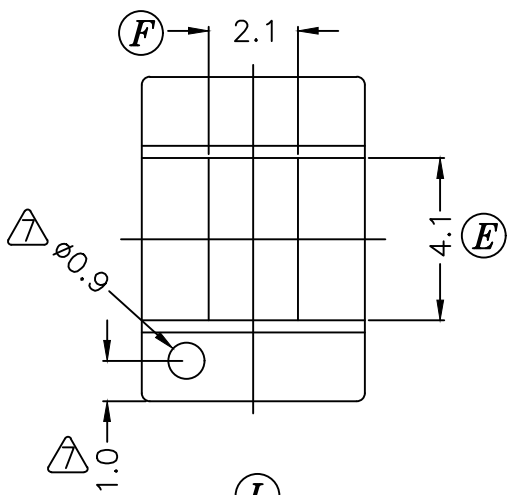

注：1.繞線管肉厚0.25mmMIN.

△2.此機種有PIN根部加扁牙和不加扁牙兩種。

DRAWING NO.	MATERIAL:	ORIGIN
P-801-2	PM9820	SZ

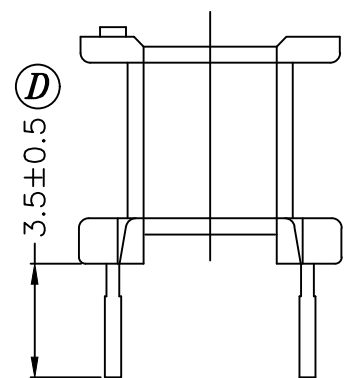

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(K):8.0-->8.1		5	追加品名:P-801-2,腳長:3.5±0.5	
2	CANCEL (J); UPDATE DRAWING		6	增加備注 △	09.05.20
3	DIM CHANGE:(G)5.8±0.2-->5.8±0.1;UPDATE DRAWING	06.11.20	7	增加尺寸標註. △	16.07.27
4	最小肉厚0.25mmMIN				


DRAWN & DRAFTED BY	李杰	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN EE-8.3		
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:		UL REC.
		16<L≤63 ±0.3	MM	PHENOLIC PM9820		UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:
				DG SZ	CP WIRE		0.7KG MIN.
					DATE:	DRAWING NO.	REV.
					MAR 05 '1998	P-801	7



PIN SHINE INDUSTRIAL CO.,LTD.

TEL:886-2-22990545

FAX:886-2-22990546



DATE: MAR.05 '1998

DRAWING NO.

P-801

REV.