

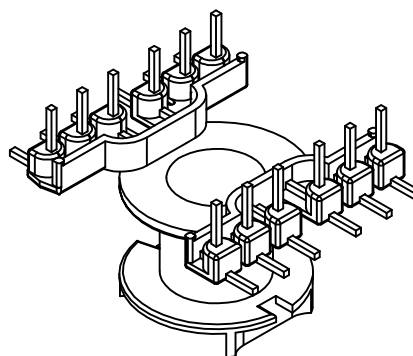
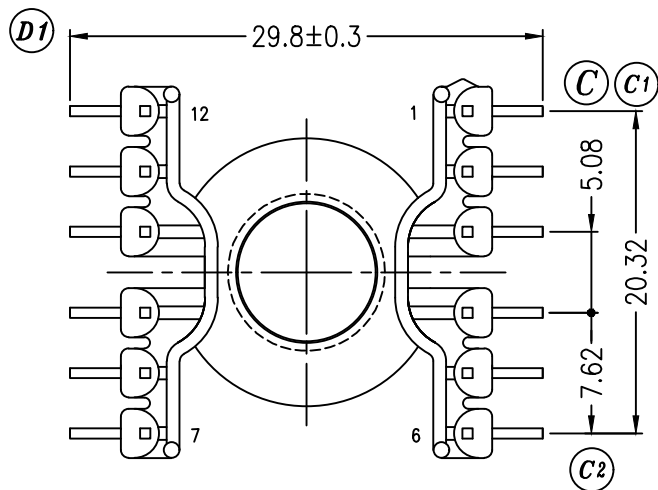
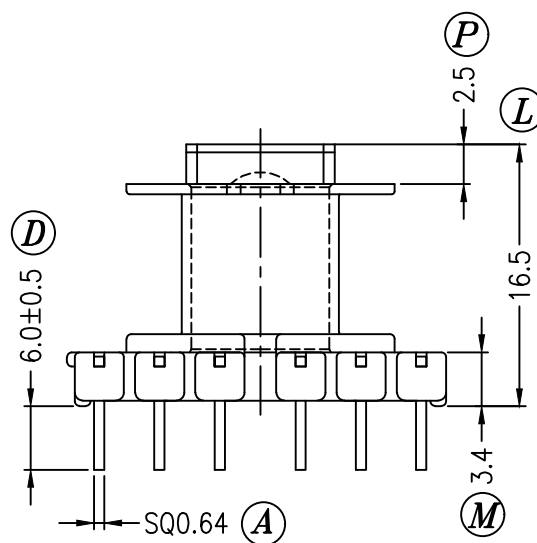


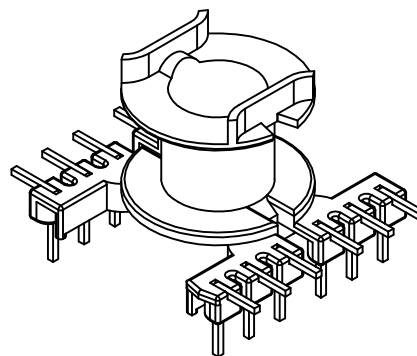

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(A) $\phi 0.6 \rightarrow SQ0.64$ (D) $4.0 \pm 0.5 \rightarrow 6.0 \pm 0.5$	00.05.18	4	拉力由1.5kg更改為1.0kg(實際制程達不到1.5kg) Δ	2010/07/25
2	CANCEL BULGE AT THE BOTTOM	04.09.25	5	增加防呆將一邊2.5凸台改為2.0mm Δ	2010/11/25
3	Δ ADD DIM (D2)	05.01.10			

DRAWN & DRAFTED BY	吳志堅	TOLERANCES	ANGLE: $\pm 1^\circ$	TITLE: T-H BOBBIN RM-8
CHECKED & APPROVED BY		$0 < L \leq 4 \pm 0.1$ $4 < L \leq 16 \pm 0.2$ $16 < L \leq 63 \pm 0.3$	UNIT: MM	BOBBIN MATERIAL: PET (FR-530)
		pin pitch ± 0.2	ORIGIN: DG	UL REC. UL 94V-0
				PIN MATERIAL: CP WIRE
				PIN TENSION LOAD: 1.0kg MIN Δ
				DATE: SEP.25, 2004
				DRAWING NO. P-803
				REV. 5

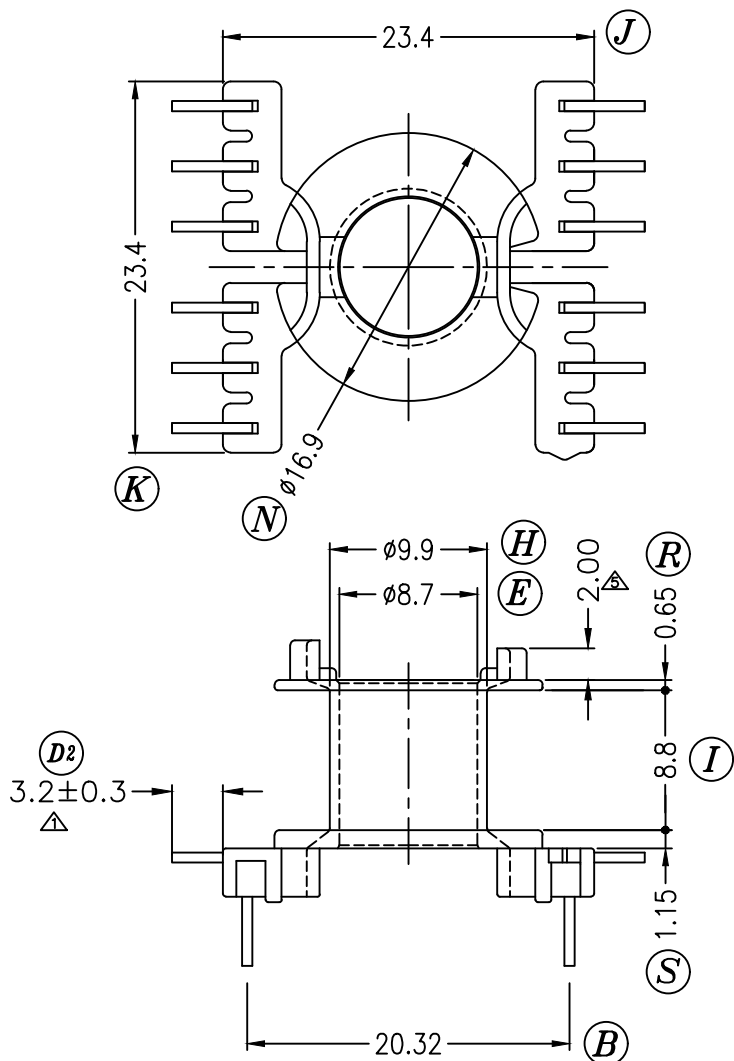

PIN SHINE INDUSTRIAL CO., LTD.

TEL: 886-2-22990545

FAX: 886-2-22990546

