

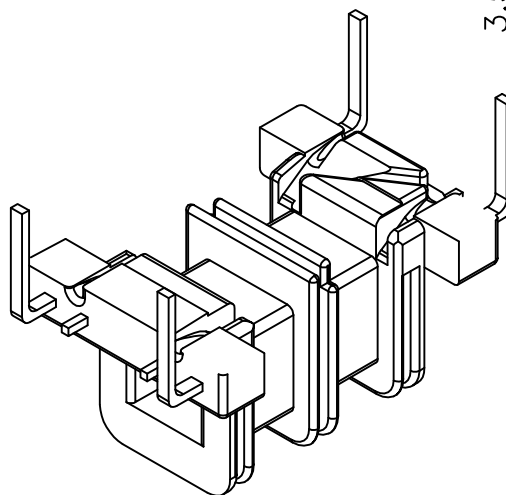
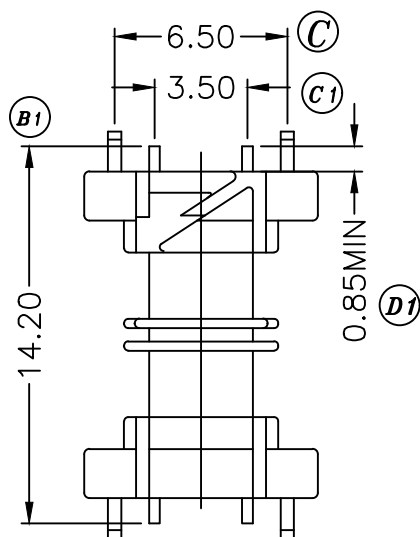
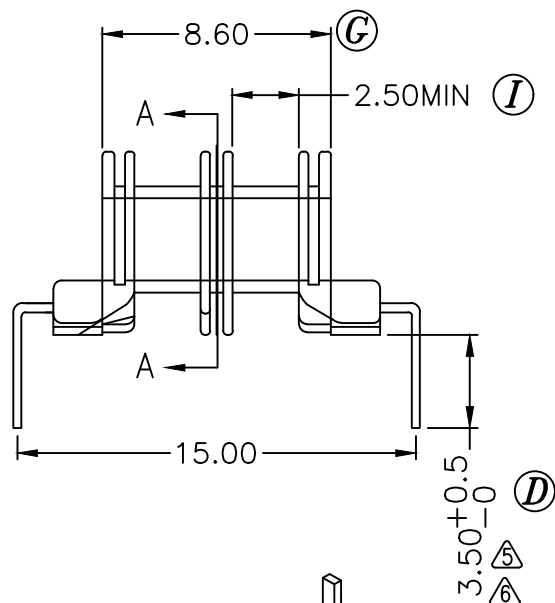
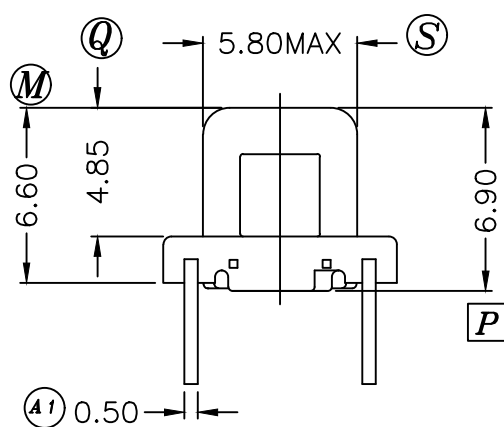
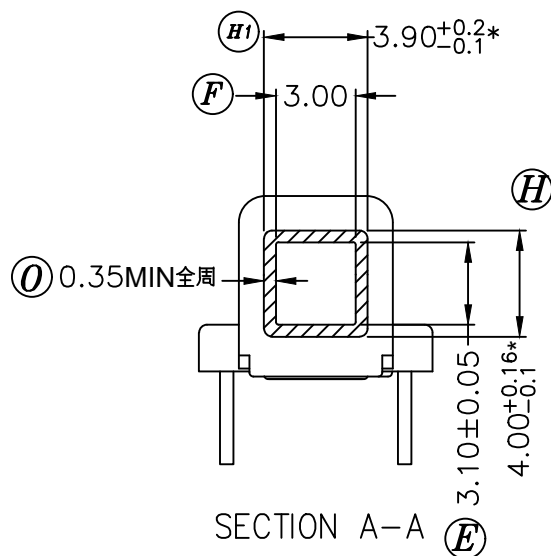


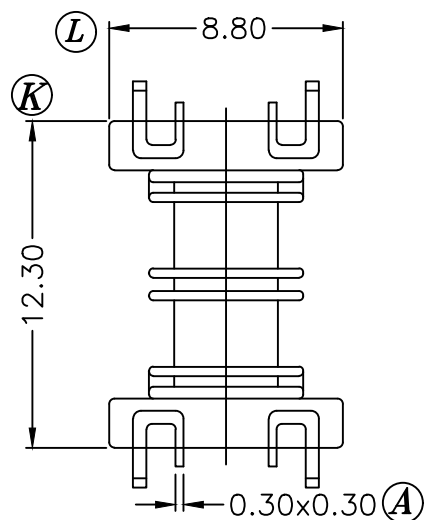

注意: 1.未標注圓角為R0.2

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	修改公差:"H1"3.90±0.1->3.90+0.2/-0.1,"H"4.00±0.1->4.00+0.16/-0.1		09.04.21	4	設變腳長: 3.0±0.5=>3.2±0.3	5	09.09.08
2	更改鐵芯孔尺寸公差:(E)3.10±0.1=>3.1±0.05		09.05.17	5	設變腳長: 3.2±0.3=>3.5+0.5/-0	6	09.11.03
3	增加管控尺寸(D1),設變(B1)尺寸14.00=>14.20		09.08.26				

DRAWN & DRAFTED BY	吳志堅	TOLERANCES		ANGLE:	TITLE:			
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	L TYPE BOBBIN EE-8.8			
CHECKED & APPROVED BY	4<L≤16 ±0.2	UNIT:		BOBBIN MATERIAL:		UL REC.		
	16<L≤63 ±0.3	MM		LCP E4008		UL 94V-0		
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:	
				DG	C5191		1.0KG MIN	
					DATE:	DRAWING NO.		REV.
					JUL.16.2003	P-0817		5



PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546