
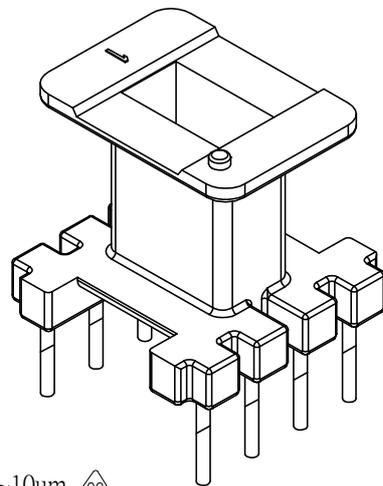
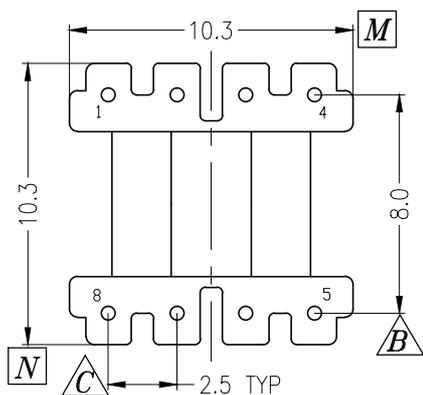
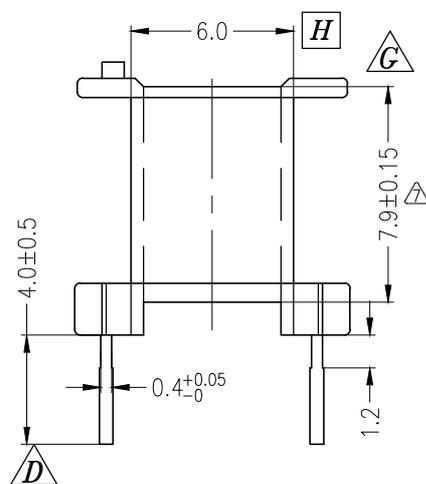


測試此面任何位置的結構強度為1.0KGMIN

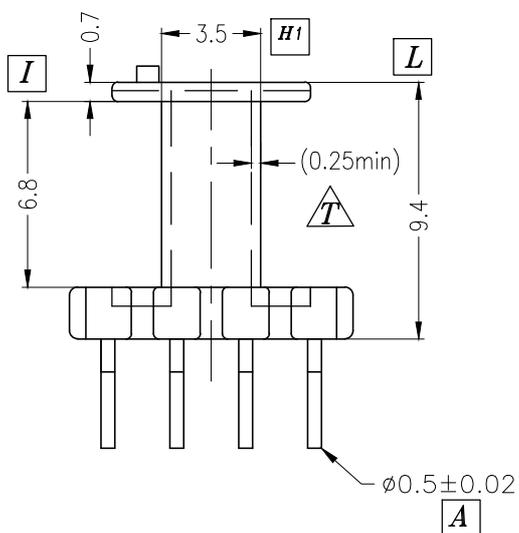

備注：  
1.電鍍規格：SN 100% 5~10um.09

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
05	更新圖面，增加打扁牙規格	18.07.20	08	加嚴鐵芯公差7.9±0.2=>7.9±0.15△	18.07.20
06	扁牙規格由0.4+0.1/-0變更為0.4+0.05/-0	18.07.20	09	增加備注△	18.07.20
07	增加PIN座結構強度測試	18.07.20	10	圖框更換	18.07.20

DRAWN & DRAFTED BY	王小雲	TOLERANCES		ANGLE:	TITLE:	
		0<L≤4 ±0.1	pin pitch	±1°	EE-10(8PIN)	
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:	UL REC.
		16<L≤63 ±0.3	±0.2	MM	PM 9820	UL 94V-0
<b>PIN SHINE INDUSTRIAL CO.,LTD.</b> TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:
				ZZ	CP線 3/4H	焊前0.7KGMIN. 焊后1.0KG MIN
				DATE:	DRAWING NO.	REV.
				JUL.20.2018	P-1004	10