
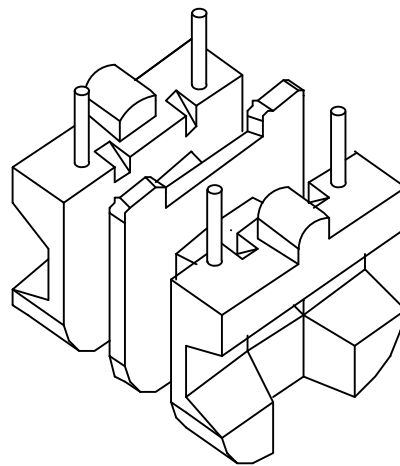
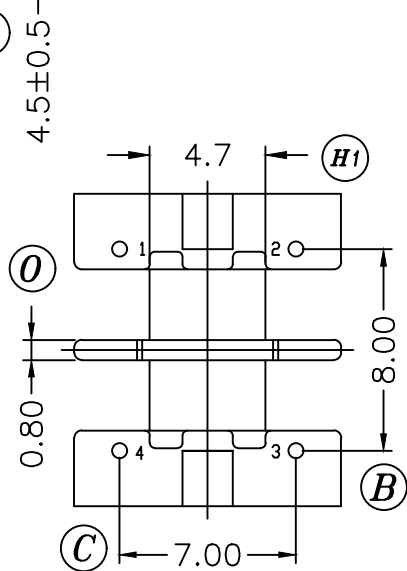
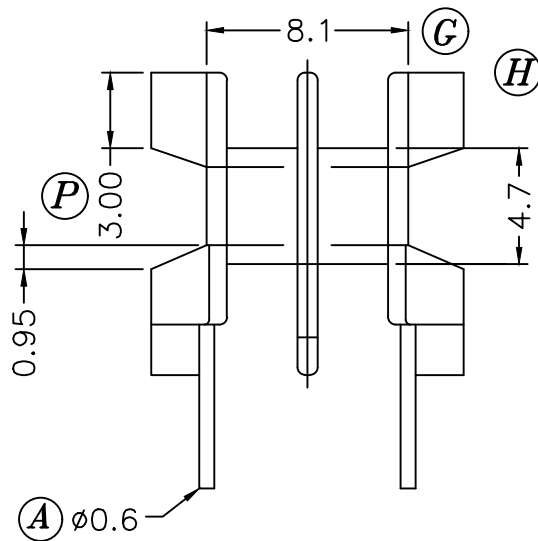
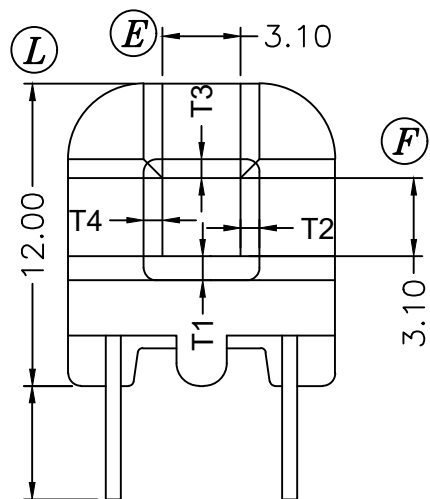
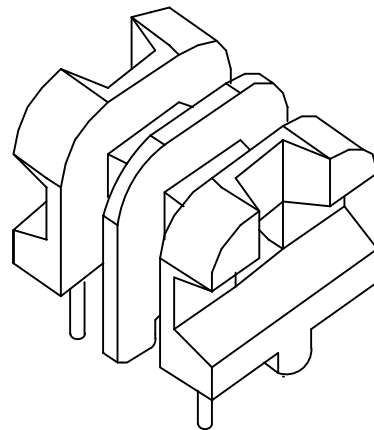
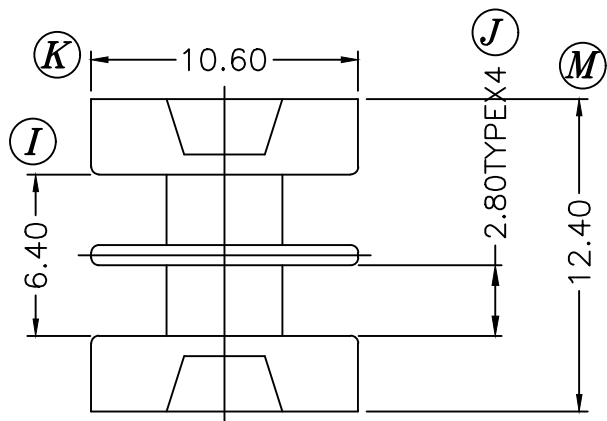




T1=T2=T3=T4, 0.65MINmm

P-1005-10是在P-1005的基础上新增PM9630材质生产

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE

DRAWN & DRAFTED BY	TAN XIAN JIE	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN UU-9.8 (2 SEC)		
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL: PM9630	UL REC.	
		16<L≤63 ±0.3	MM	UL 94V-0			
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				DG	CP WIRE	1.5KG MIN	
					DATE:	DRAWING NO.	REV.
					MAR.28 '2003	P-1005-10	0