
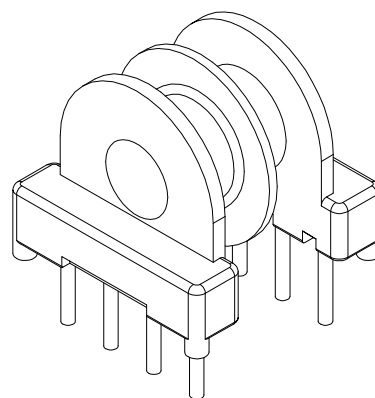
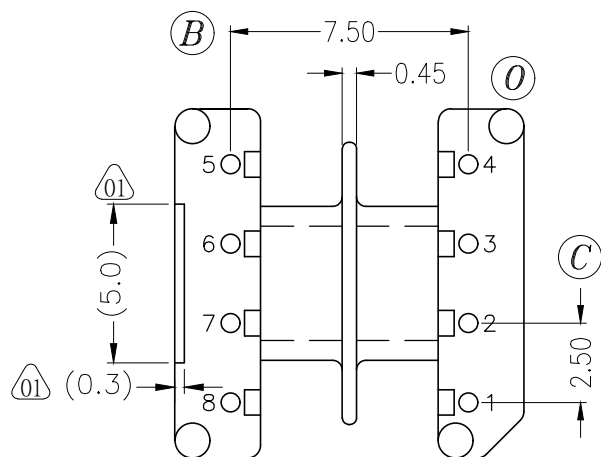
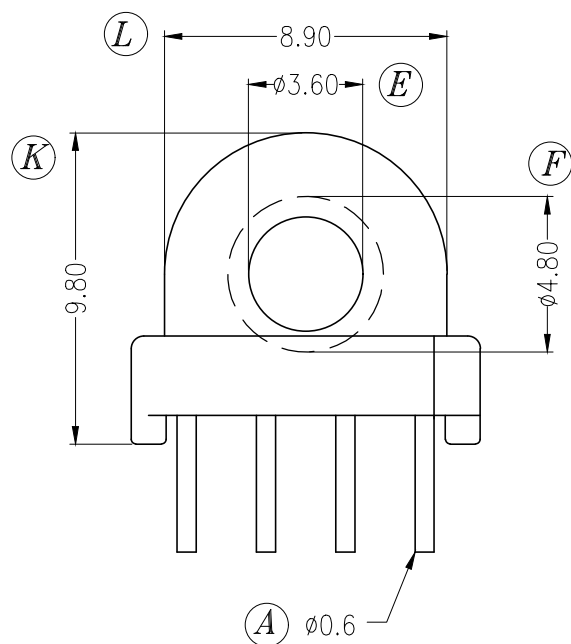
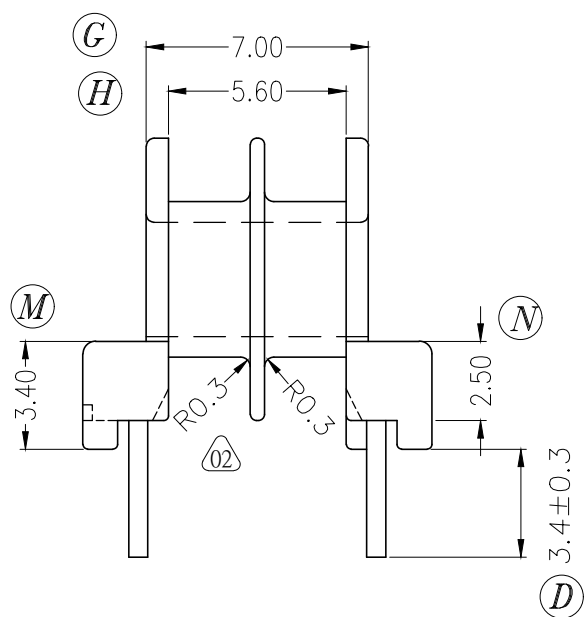
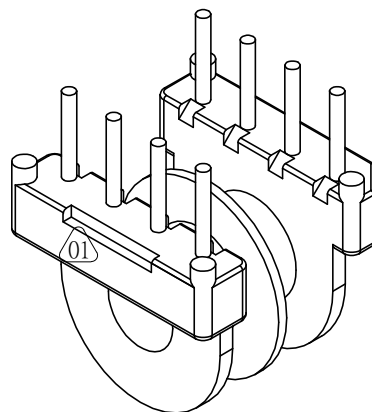
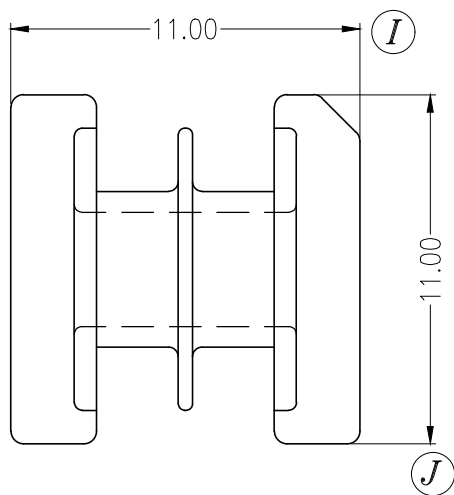




B-038.201P (B-038-1)

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
01	增加缺口進膠	01	2010.06.01				
02	叶片根部加R0.3	02	2015.10.16				

DRAWN & DRAFTED BY	陈海青	TOLERANCES		ANGLE:	TITLE:		
CHECKED & APPROVED BY		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	pin pitch ±0.2	±1°	T-H BOBBIN EP-10 (2 GROOVES)		
				UNIT: MM	BOBBIN MATERIAL: PHENOLIC (PM-9630)	UL REC. UL 94V-0	
				ORIGIN: DG	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.0KG MIN	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546					DATE: OCT.20 '2004	DRAWING NO. P-1009-1	REV. 02