

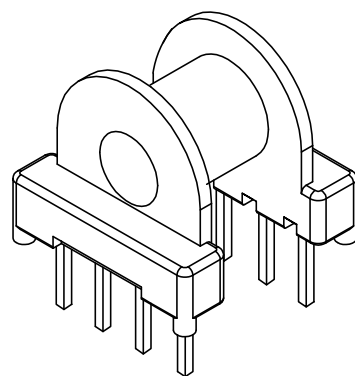
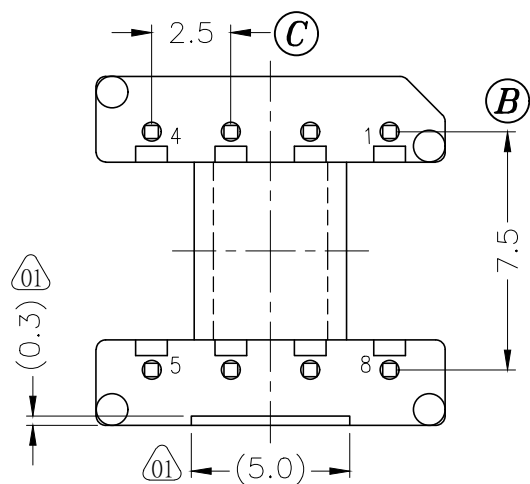
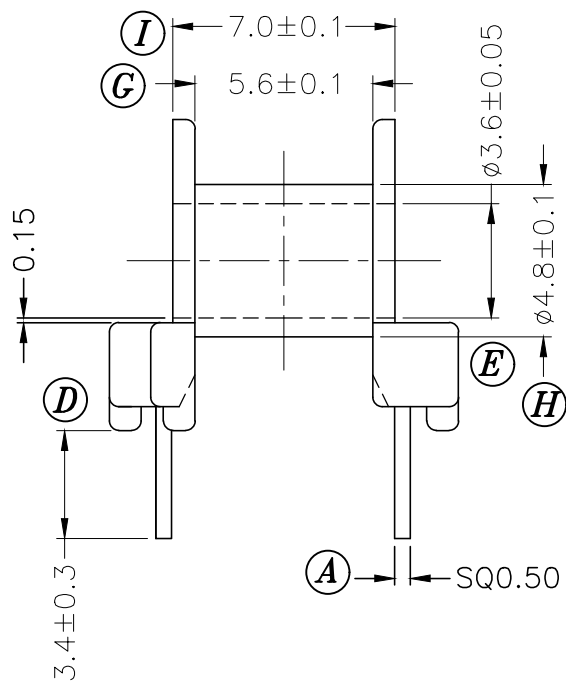
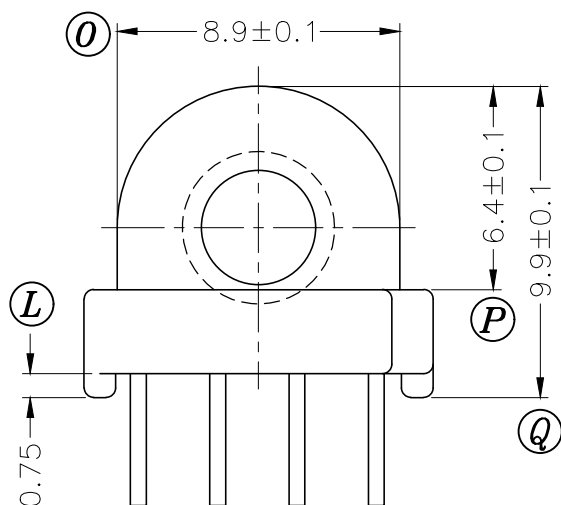
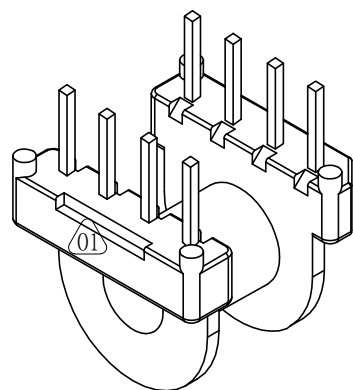


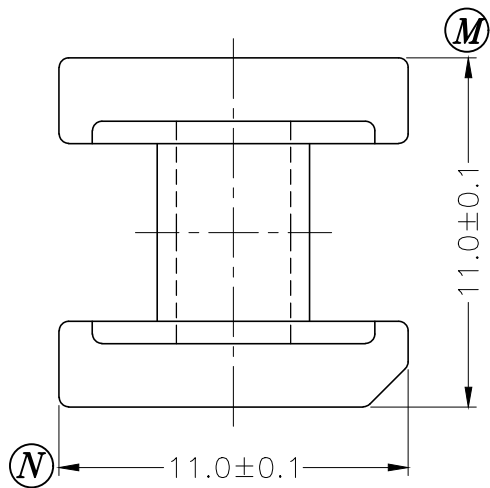

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
01	增加缺口進膠	(01)	2010.06.01				

DRAWN & DRAFTED BY	Chen jianyong	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN EP-10 (2 GROOVES)		
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:		UL REC.
		16<L≤63 ±0.3	MM	PHENOLIC (PM-9630)		UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:
				DG	CP WIRE		1.0KG MIN
					DATE:	DRAWING NO.	REV.
					OCT.20 '2004	P-1009-2	01



PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546

