



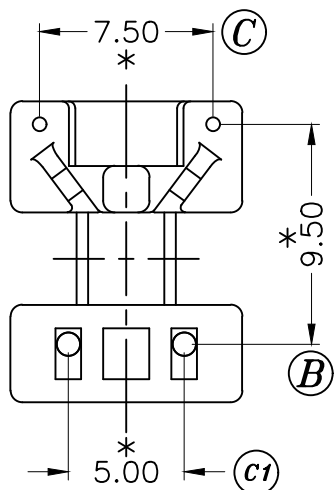
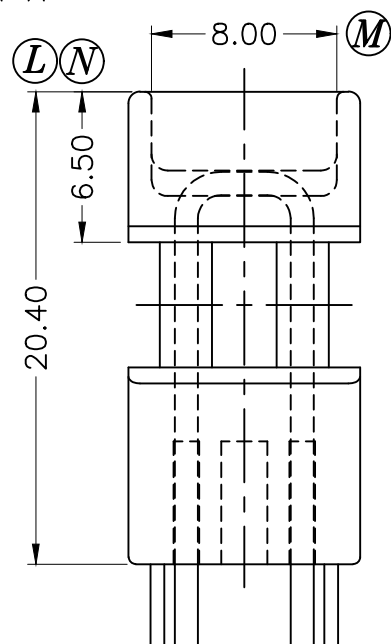
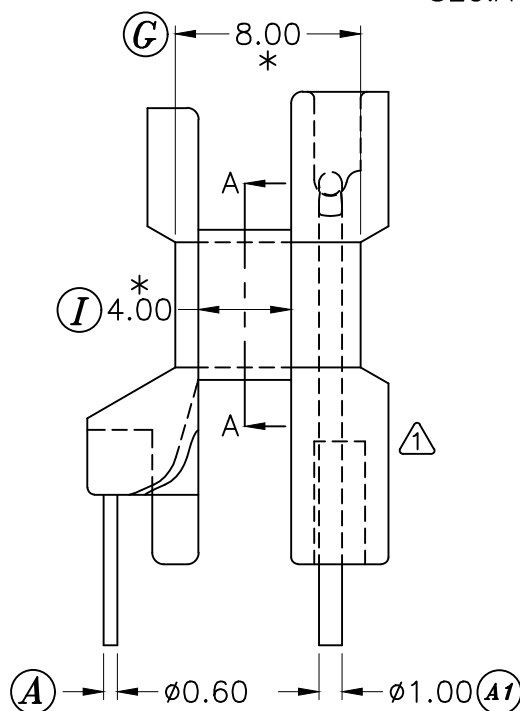
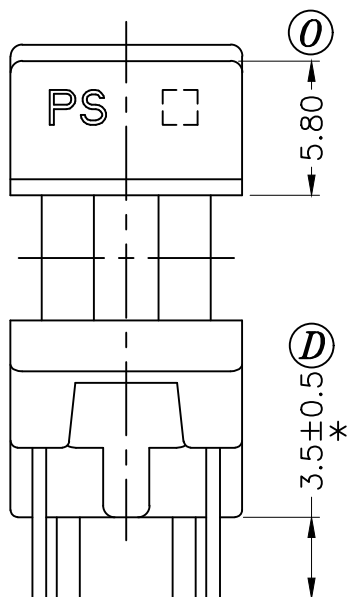
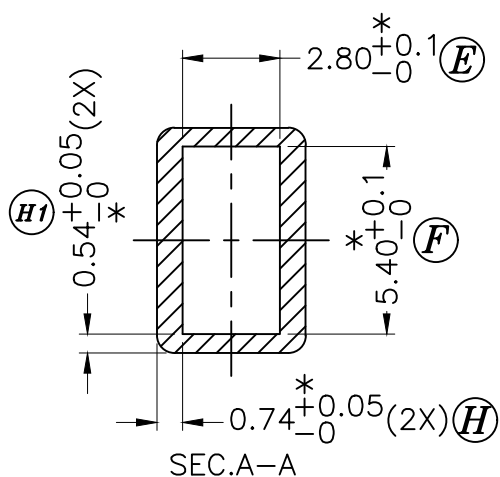


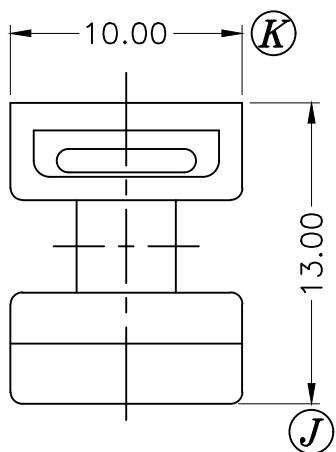

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	(F):5.0→5.40;(H1):0.74 ^{+0.05} ₋₀ →0.54 ^{+0.05} ₋₀ ;(N):6.70→6.50;		'08.07.08				
	(O):6.0→5.8; SHAPE MODIFIED: 1						

DRAWN & DRAFTED BY	HOU YI MIN	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN EE-10.2		
CHECKED & APPROVED BY	4<L≤16 ±0.2	UNIT:		BOBBIN MATERIAL:		UL REC.	
	16<L≤63 ±0.3	MM		LCP E4008 BK		UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:
				SZ	CP WIRE		1.5KG MIN
					DATE:	DRAWING NO.	REV.
					JAN.10 '2005	P-1025	1



PIN SHINE INDUSTRIAL CO.,LTD.

TEL:886-2-22990545

FAX:886-2-22990546