
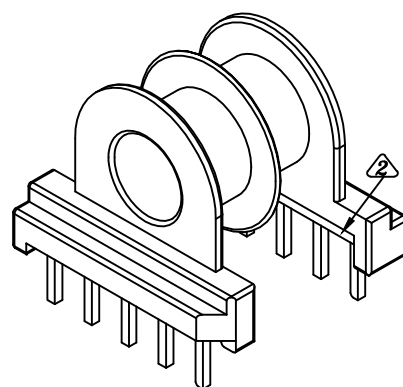
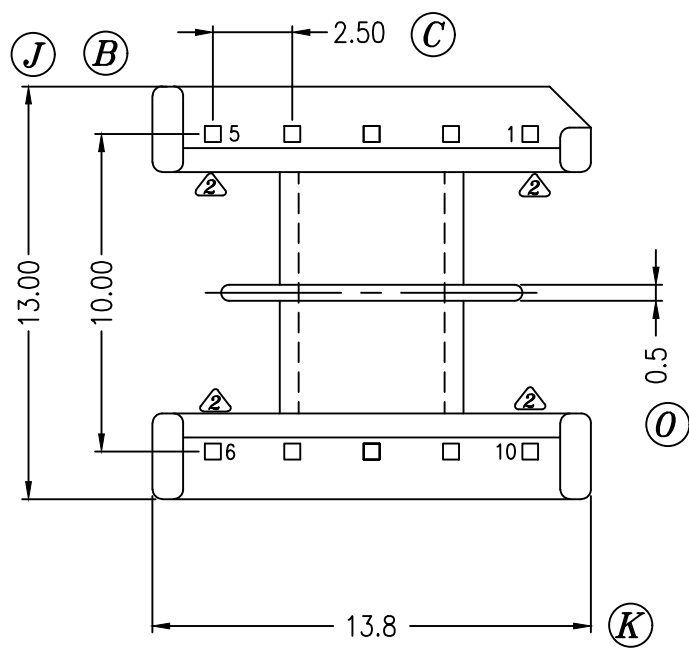
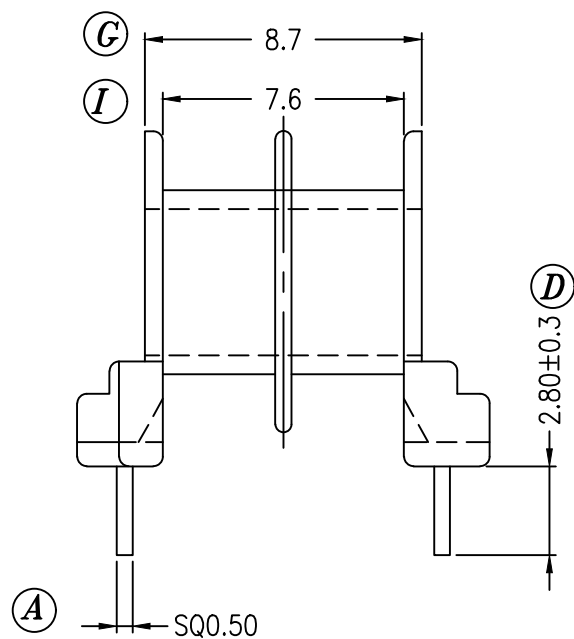


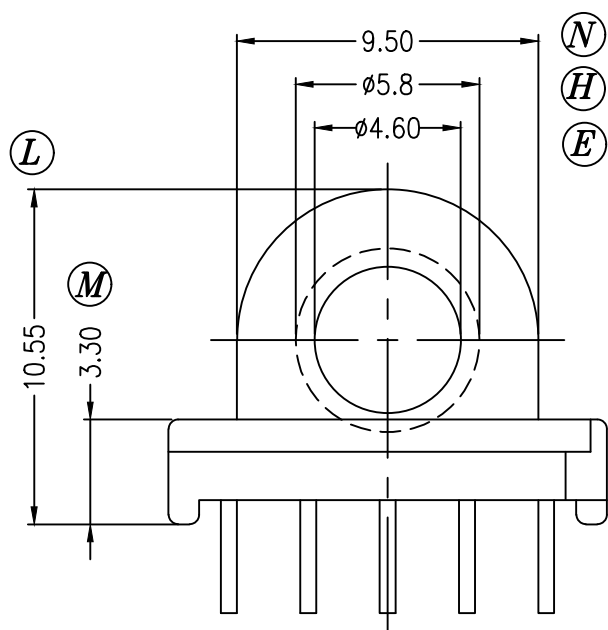


⚠ 備註:

1.未定義R=0.3

2.電鍍規格 Sn100% 5~10um
Ni 1.25~2.5um

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	更新圖面		'06.06.25				
2	修改圖面錯誤 ②		'19.01.19				
3	新增備註 ③		'19.06.21				

DRAWN & DRAFTED BY	黃金宇	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	BOBBIN EP-13 (2 GROOVES)		
CHECKED & APPROVED BY	4<L≤16 ±0.2	UNIT:		BOBBIN MATERIAL:	UL REC.		
	16<L≤63 ±0.3	MM		PHENOLIC (PM-9630)	UL 94V-0		
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				DG	CP WIRE	1.0kg MIN.	
					DATE:	DRAWING NO.	REV.
					SEP.04 '2000	P-1308	3