

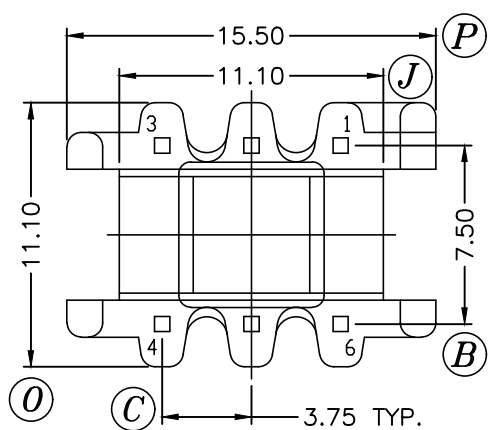
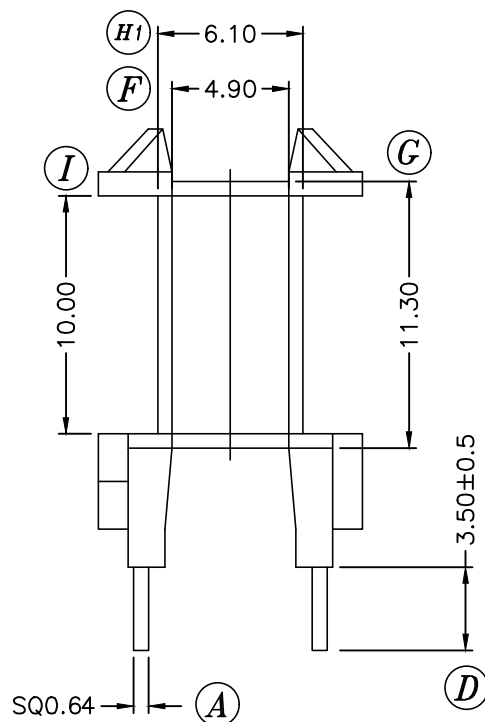
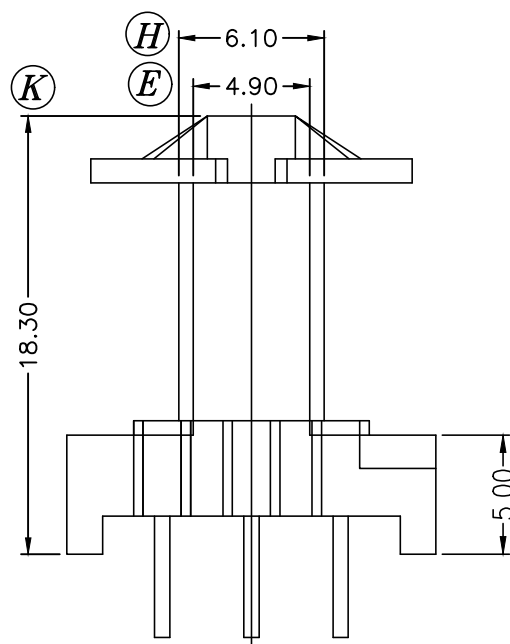
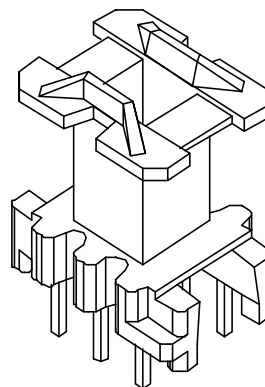


REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	(E)(F): $4.9^{+0.1}_{-0}$ → 4.9	(H)(H1): $6.1^{+0}_{-0.1}$ → 6.1					
	(G): $11.2^{+0}_{-0.1}$ → 11.3						
2	CANCEL (R),(L).						

DRAWN & DRAFTED BY	QIN JIANG HU	TOLERANCES		pin pitch ±0.2	ANGLE:	TITLE:		
		0<L≤4 ±0.1	4<L≤16 ±0.2		16<L≤63 ±0.3	±1°	T-H BOBBIN EF-16	
CHECKED & APPROVED BY	JOHN RONG				UNIT:	BOBBIN MATERIAL:		UL REC.
					MM	PET FR530		UL 94V-0
					ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:
					DG	CP WIRE		1.5KG MIN
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546						DATE:	DRAWING NO.	REV.
						MAR.31 '2003	P-1601	2

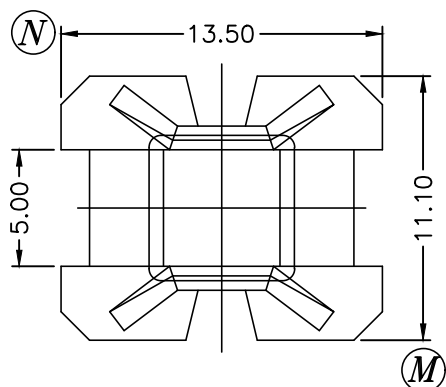

PIN SHINE INDUSTRIAL CO., LTD.
TEL:886-2-22990545 FAX:886-2-22990546

