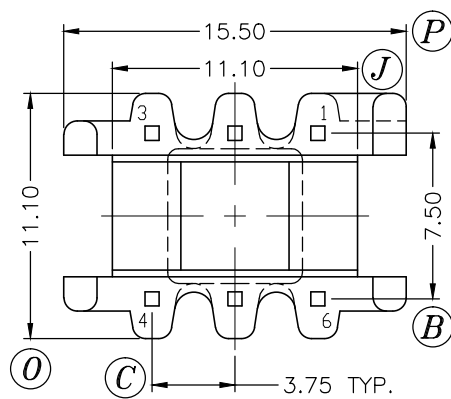
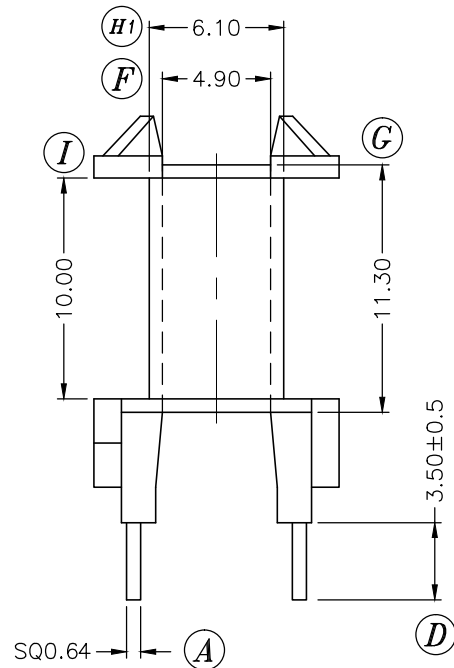
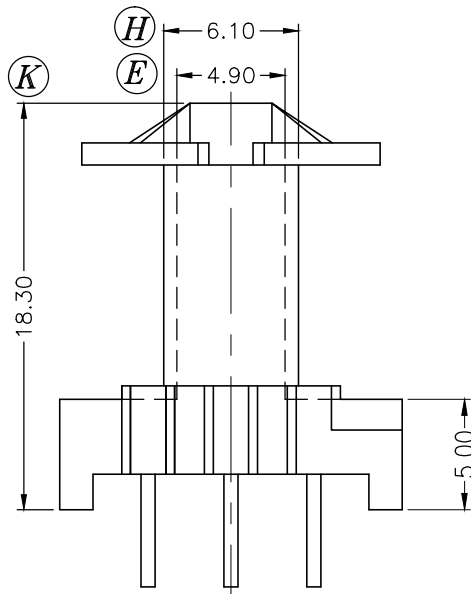
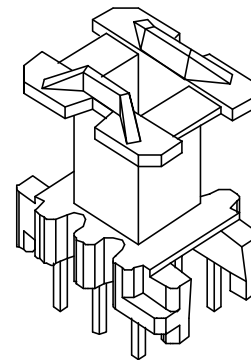
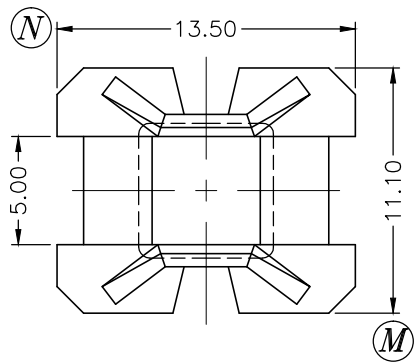


REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	(E)(F): $4.9 \pm 0.1 \rightarrow 4.9$	(H)(H1): $6.1 \pm 0.1 \rightarrow 6.1$					
	(G): $11.2 \pm 0.1 \rightarrow 11.3$						
2	CANCEL (R),(L).						

DRAWN & DRAFTED BY	QIN JIANG HU	TOLERANCES		ANGLE:	TITLE:			
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN EF-16			
CHECKED & APPROVED BY	JOHN RONG	4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:		UL REC.	
		16<L≤63 ±0.3	MM	PET FR530		UL 94V-0		
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:	
				ZZ	CP WIRE		1.5KG MIN	
					DATE:	DRAWING NO.	REV.	
					MAR.31 '2003			P-1601