

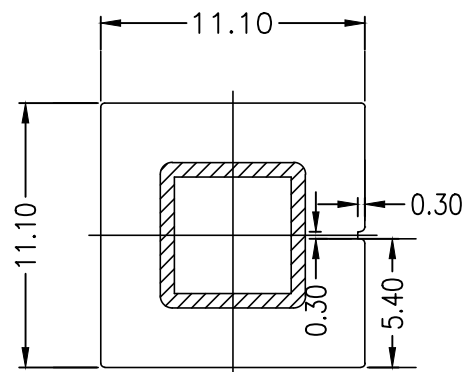
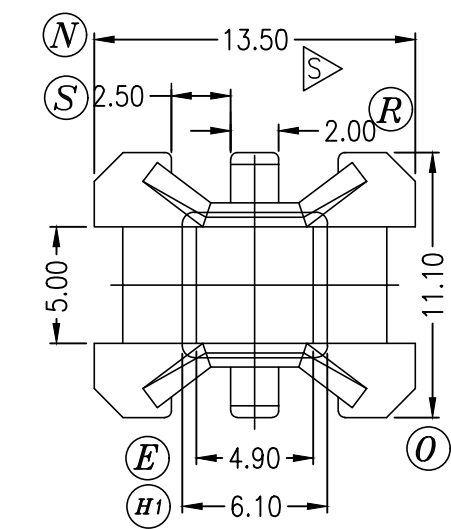
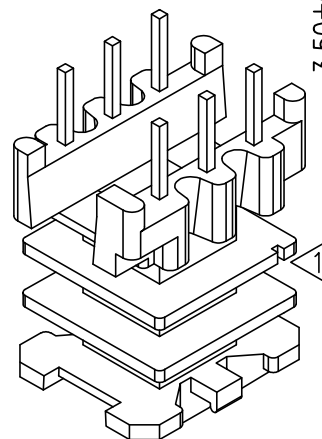
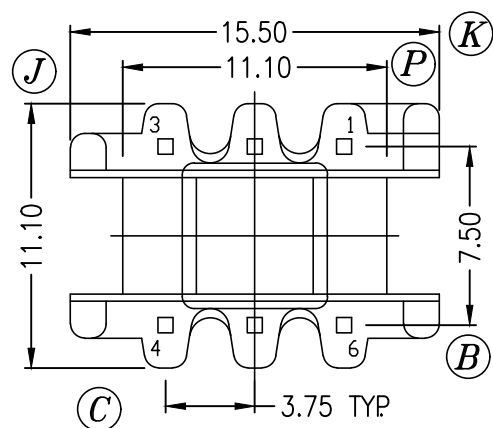


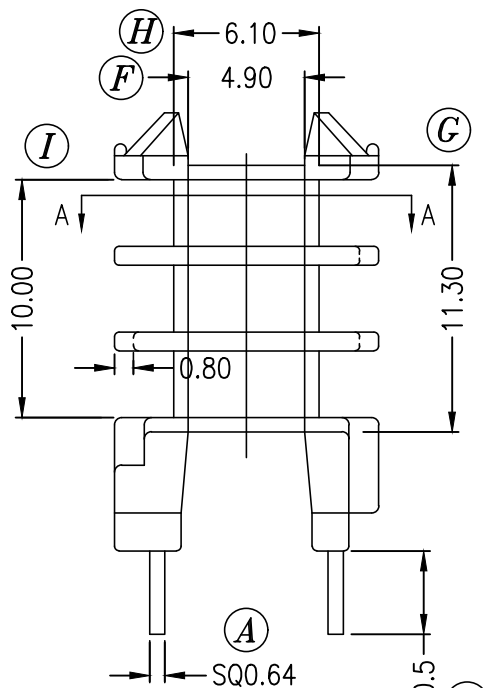

SEC. A-A

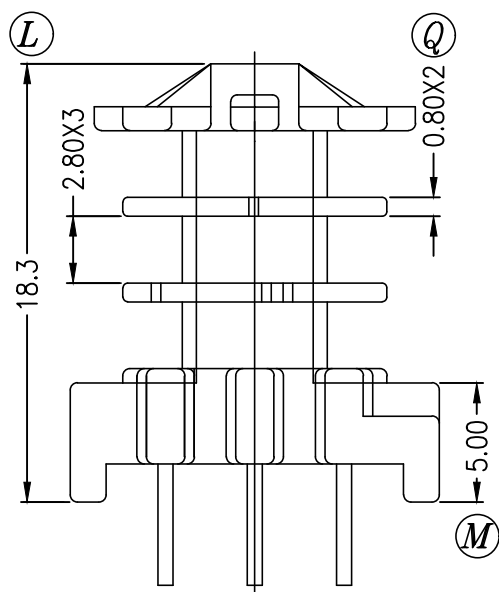

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	CORRECT THE DRAWING AS REQUEST.	'03.12.18	4	CHANGE FRAME	'04.03.17
2	CORRECT THE DRAWING ON $\triangle S$		5	UPDATE DRAWING $\triangle$	'08.01.07
3	CORRECT THE DRAWING ON $\triangle S$ AS REQUEST.				

DRAWN & DRAFTED BY	QIN JIANG HU	TOLERANCES	ANGLE:	TITLE:		
CHECKED & APPROVED BY	JOHN RONG	0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	±1°	BOBBIN EF-16 (3 GROOVES)		
		pin pitch ±0.2	UNIT:	BOBBIN MATERIAL:		UL REC.
			MM	PET (FR-530)		UL 94V-0
			ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:
			DG	CP WIRE		1.0KG MIN
				DATE:	DRAWING NO.	REV.
				MAR.17'2004	P-1601-2	5



PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546

