
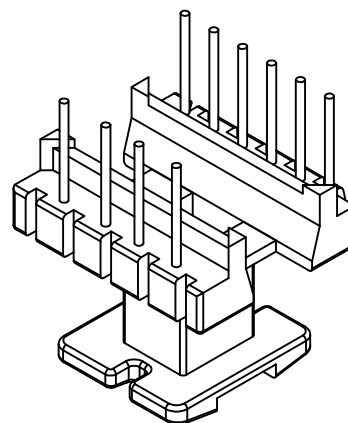
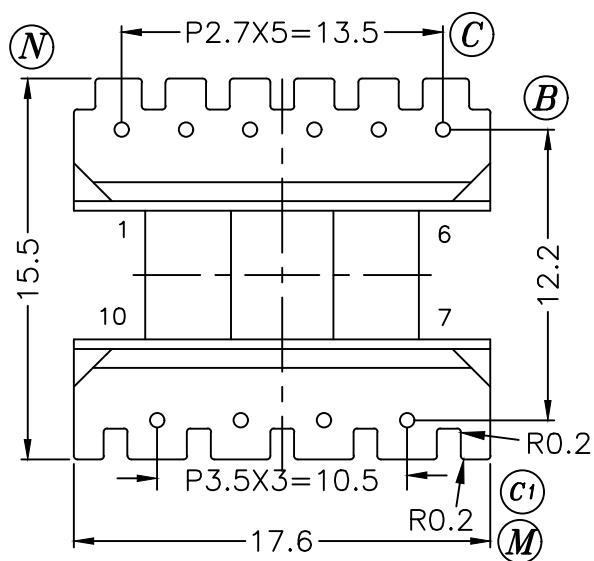
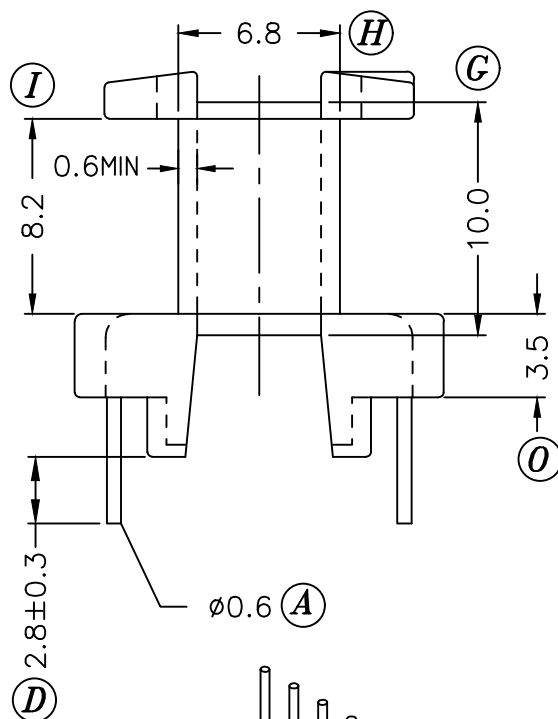
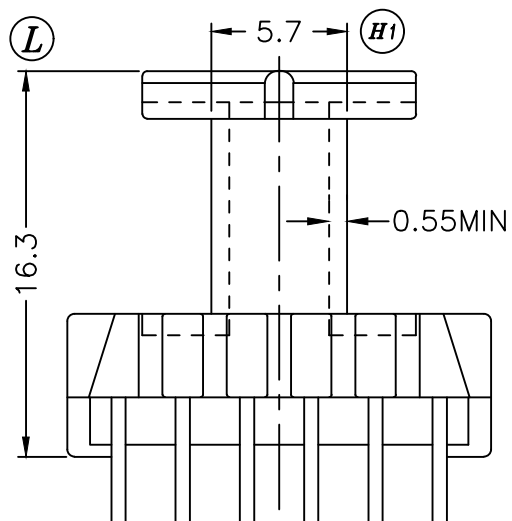
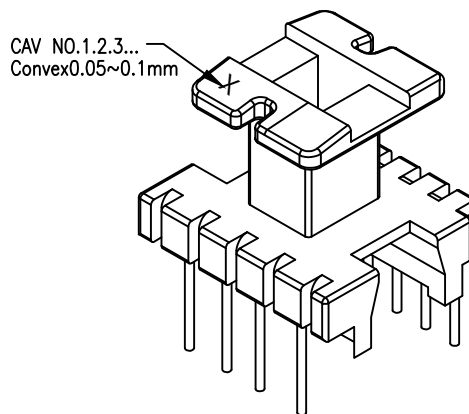


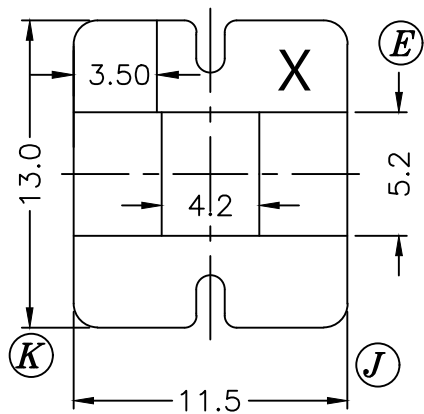

| REV. | REVISIONS | REC. | DATE | REV. | REVISIONS | REC. | DATE |
|------|-----------|------|------|------|-----------|------|------|
|      |           |      |      |      |           |      |      |
|      |           |      |      |      |           |      |      |
|      |           |      |      |      |           |      |      |
|      |           |      |      |      |           |      |      |

|                                                                                                                                                                |              |              |                   |              |                  |                   |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|-------------------|--------------|------------------|-------------------|--|
| DRAWN &<br>DRAFTED BY                                                                                                                                          | HUANG JIN YU | TOLERANCES   |                   | ANGLE:       | TITLE:           |                   |  |
|                                                                                                                                                                |              | 0<L≤4 ±0.1   | pin pitch<br>±0.2 | ±1°          | T-H BOBBIN EE-16 |                   |  |
| CHECKED &<br>APPROVED BY                                                                                                                                       |              | 4<L≤16 ±0.2  |                   | UNIT:        | BOBBIN MATERIAL: | UL REC.           |  |
|                                                                                                                                                                |              | 16<L≤63 ±0.3 | MM                | DAP AM113_BK | UL 94V-0         |                   |  |
|  PIN SHINE INDUSTRIAL CO.,LTD.<br>TEL:886-2-22990545      FAX:886-2-22990546 |              |              |                   | ORIGIN:      | PIN MATERIAL:    | PIN TENSION LOAD: |  |
|                                                                                                                                                                |              |              |                   | DG           | CP WIRE          | 1.5KG MIN.        |  |
|                                                                             |              |              |                   | DATE:        | DRAWING NO.      | REV.              |  |
|                                                                                                                                                                |              |              |                   | Dec.20'2018  | P-1607-6         | 0                 |  |