
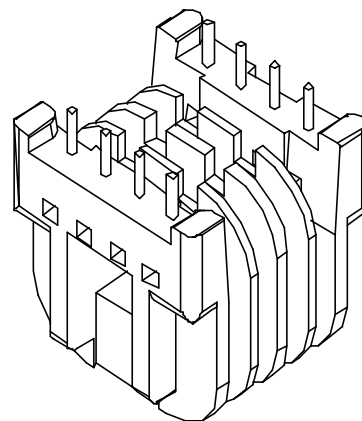
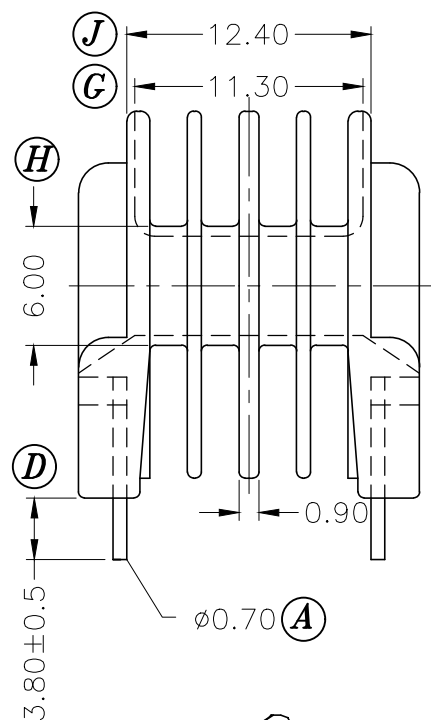


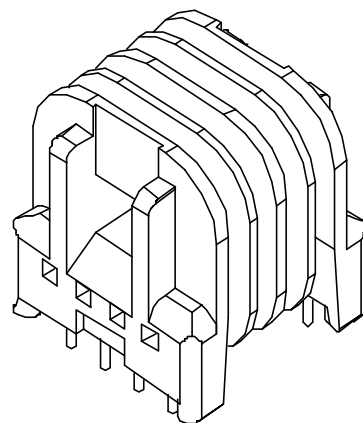

|                                                                                                                                                                       |              |  |              |                   |                                                                                     |                           |             |                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--|--------------|-------------------|-------------------------------------------------------------------------------------|---------------------------|-------------|-------------------|
| DRAWN &<br>DRAFTED BY                                                                                                                                                 | QIN JIANG HU |  | TOLERANCES   |                   | ANGLE:                                                                              | TITLE:                    |             |                   |
| CHECKED &<br>APPROVED BY                                                                                                                                              | JOHN RONG    |  | 0<L≤4 ±0.1   | pin pitch<br>±0.2 | ±1°                                                                                 | T-H BOBBIN UU-16V (4 SEC) |             |                   |
|                                                                                                                                                                       |              |  | 4<L≤16 ±0.2  |                   | UNIT:                                                                               | BOBBIN MATERIAL:          |             | UL REC.           |
|                                                                                                                                                                       |              |  | 16<L≤63 ±0.3 |                   | MM                                                                                  | PBT 4130                  |             | UL 94V-0          |
|  <b>PIN SHINE INDUSTRIAL CO.,LTD.</b><br>TEL:886-2-22990545      FAX:886-2-22990546 |              |  |              |                   | ORIGIN:                                                                             | PIN MATERIAL:             |             | PIN TENSION LOAD: |
|                                                                                                                                                                       |              |  |              |                   | DG                                                                                  | CP WIRE                   |             | 1.5KG MIN.        |
|                                                                                                                                                                       |              |  |              |                   |  | DATE:                     | DRAWING NO. | REV.              |
|                                                                                                                                                                       |              |  |              |                   |                                                                                     | MAR.31 '2003              | P-1608      | 4                 |