
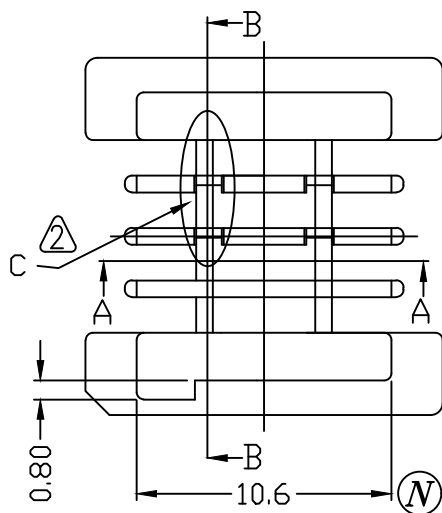
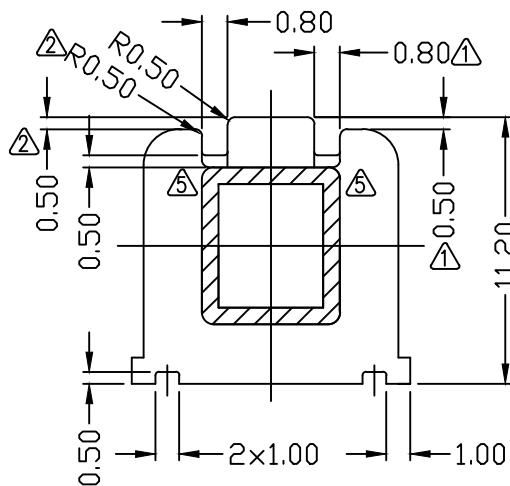
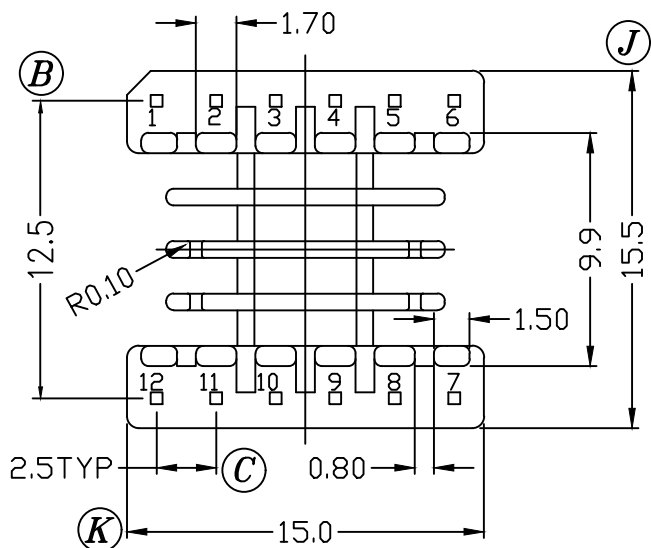
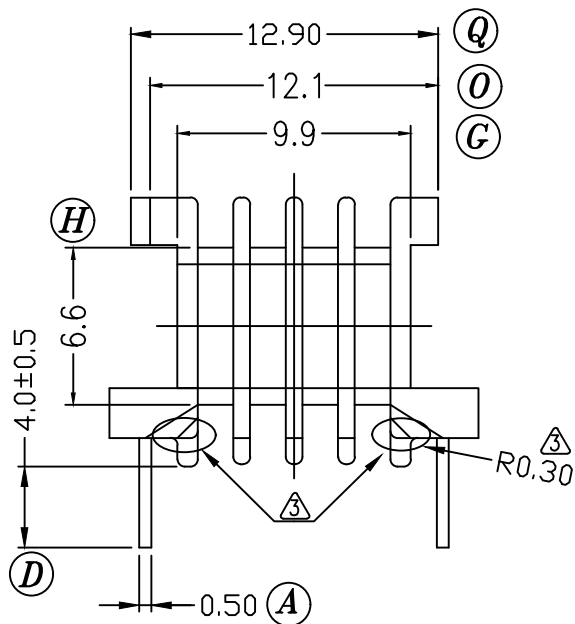
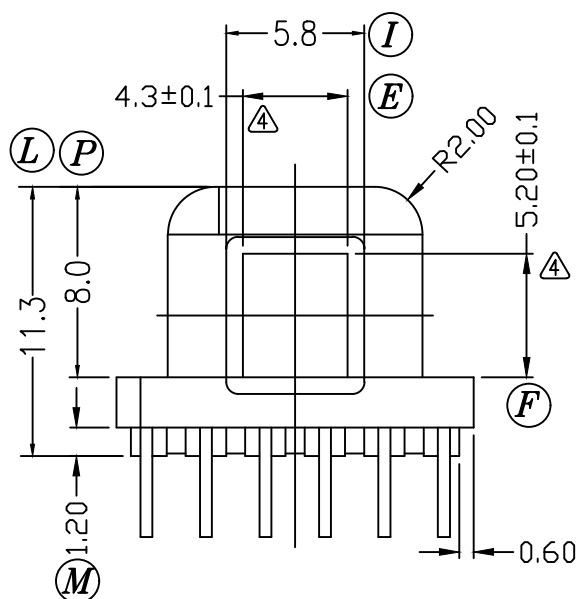


SEC. B-B
SCALE 2 : 1
C

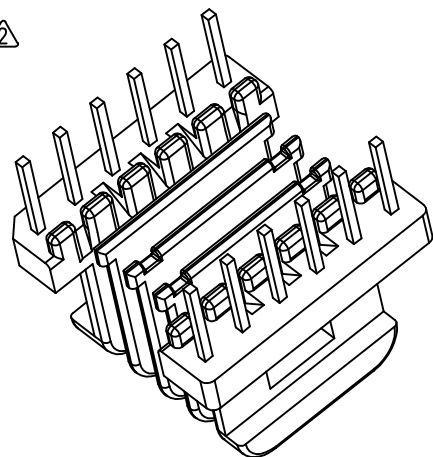

SECTION A-A

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	① CHANGE SLOT DIMENSION 2.08 → 0.8; 0 → 0.5	'05.11.28	4	④ CHANGE TOLERANCES: 5.2 → 5.2±0.1; 4.3 → 4.3±0.1	'06.06.24
2	② ADD SLOT: 0.8*0.4*0.5.	'06.02.24	5	⑤ 變更線槽	'19.03.20
3	③ ADD 0.3mm R CORNER.	'06.04.12			

DRAWN & DRAFTED BY	YE ZHAN CHAO	TOLERANCES		ANGLE: ±1°	TITLE: BOBBIN EE-16H (4 GROOVES)		
		0<L≤4 ±0.1	pin pitch ±0.2				
CHECKED & APPROVED BY		4<L≤16 ±0.2					
		16<L≤63 ±0.3					
				UNIT: MM	BOBBIN MATERIAL: PHENOLIC (PM 9820 JR)		UL REC. UL 94V-0
				ORIGIN: DG	PIN MATERIAL: CP WIRE		PIN TENSION LOAD: 1.0KG MIN
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546					DATE: AUG.03 '2005	DRAWING NO. P-1616-1	REV. 5