


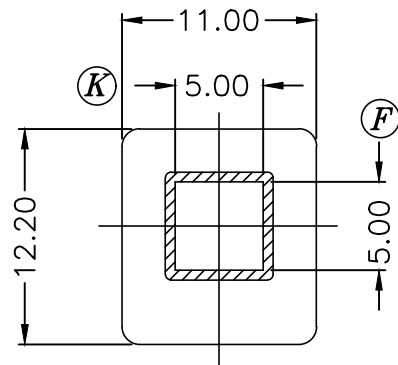
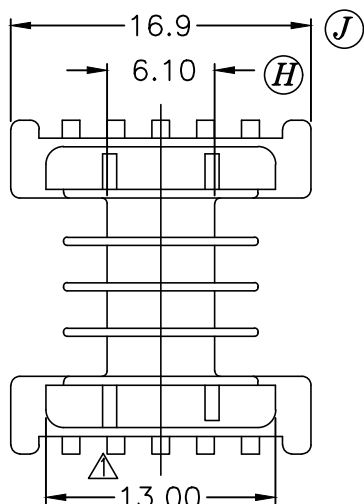


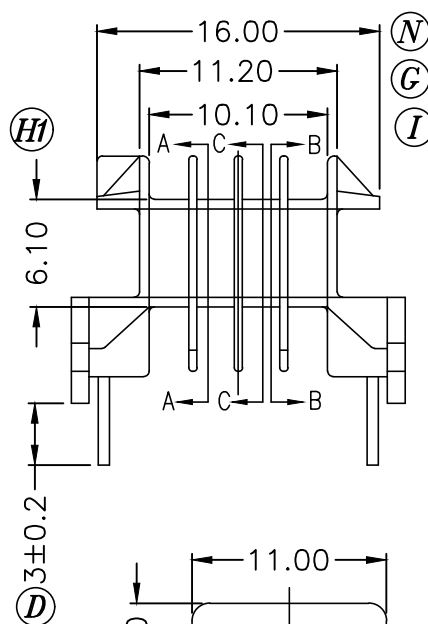

SECTION C-C

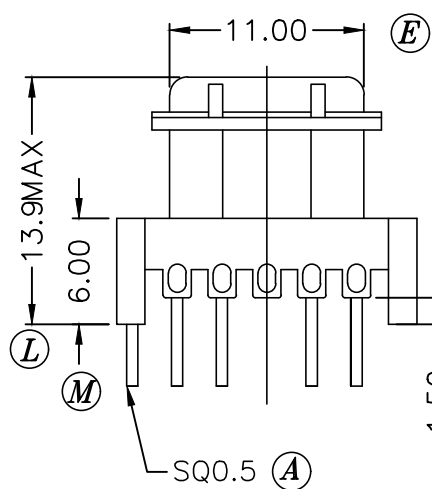

SECTION A-A B-B

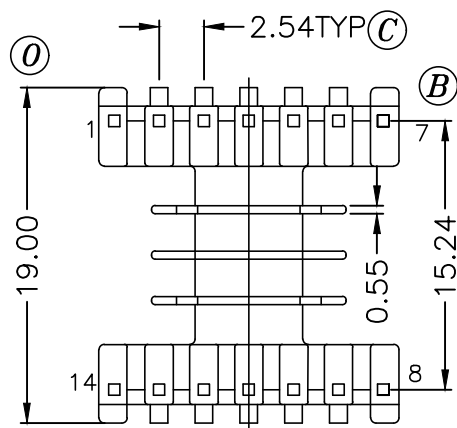

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	(M)5.5-->6.0;(L)13.5-->13.9MAX; CORRECT FRISY DIM		'04.3.26				
2	(D)3.0±0.2-->3.1+0.1/-0.2.		'04.4.26				

DRAWN & DRAFTED BY	QIN JIANG HU	TOLERANCES		ANGLE: ±1°	TITLE: BOBBIN EF-16H(14PIN)			
		0<L≤4 ±0.1	pin pitch ±0.2					UNIT:
CHECKED & APPROVED BY	JOHN RONG	4<L≤16 ±0.2		MM	BOBBIN MATERIAL: PHENOLIC(PM-9820)	UL REC. UL 94V-0		
		16<L≤63 ±0.3						
				ORIGIN: DG	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.5KG MIN		
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546					DATE: JUN.24 '2003	DRAWING NO. P-1620-3	REV. 2	