

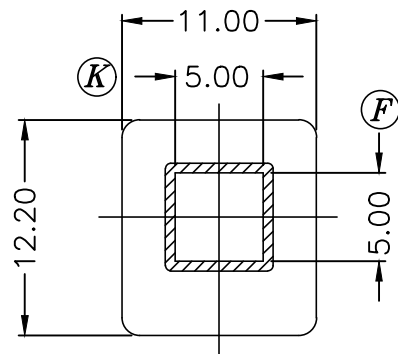
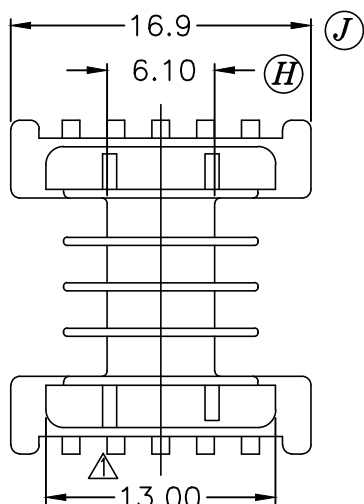
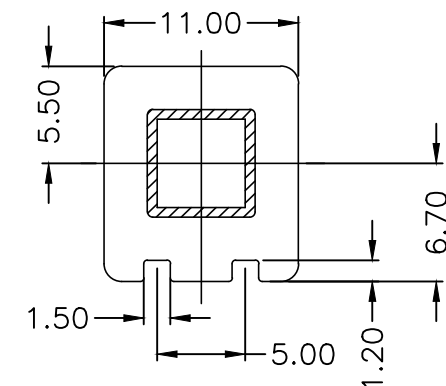
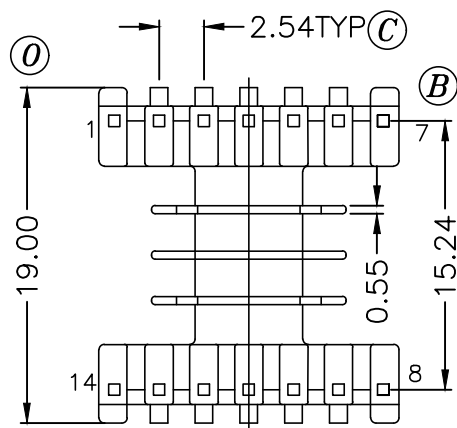


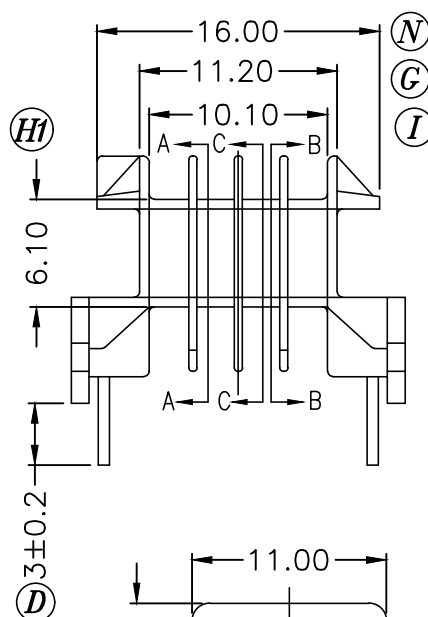

SECTION C-C

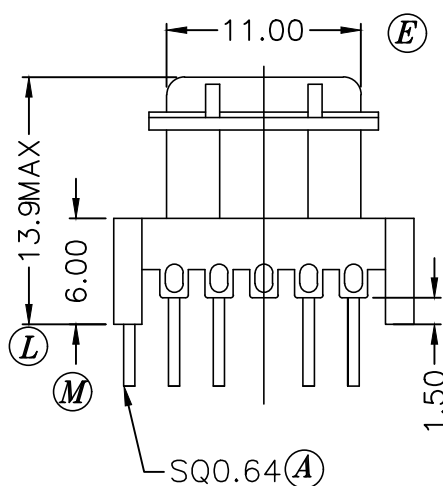

SECTION A-A B-B

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(M)5.5-->6.0;(L)13.5-->13.9MAX; CHANGE FRIST DIM Δ	'04.3.26			
2	(D)3.0±0.2-->3.1+0.1/-0.2.	'04.4.26			

DRAWN & DRAFTED BY	QIN JIANG HU	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN EF-16H(14PIN)		
CHECKED & APPROVED BY	JOHN RONG	4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL: PHENOLIC(PM-9820)	UL REC. UL 94V-0	
		16<L≤63 ±0.3		MM			
				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				DG	CP WIRE	1.5KG MIN	
					DATE:	DRAWING NO.	REV.
					JUN.24 '2003	P-1620-5	2



PIN SHINE INDUSTRIAL CO.,LTD.

TEL:886-2-22990545 FAX:886-2-22990546



PIN SHINE INDUSTRIAL CO.,LTD.

TEL:886-2-22990545

FAX:886-2-22990546

