
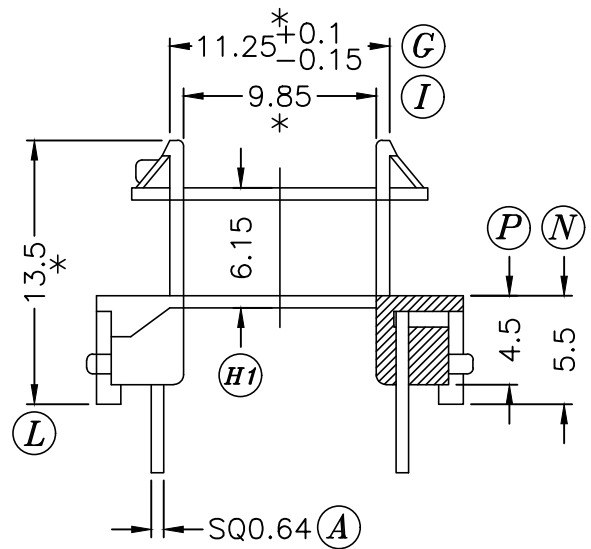


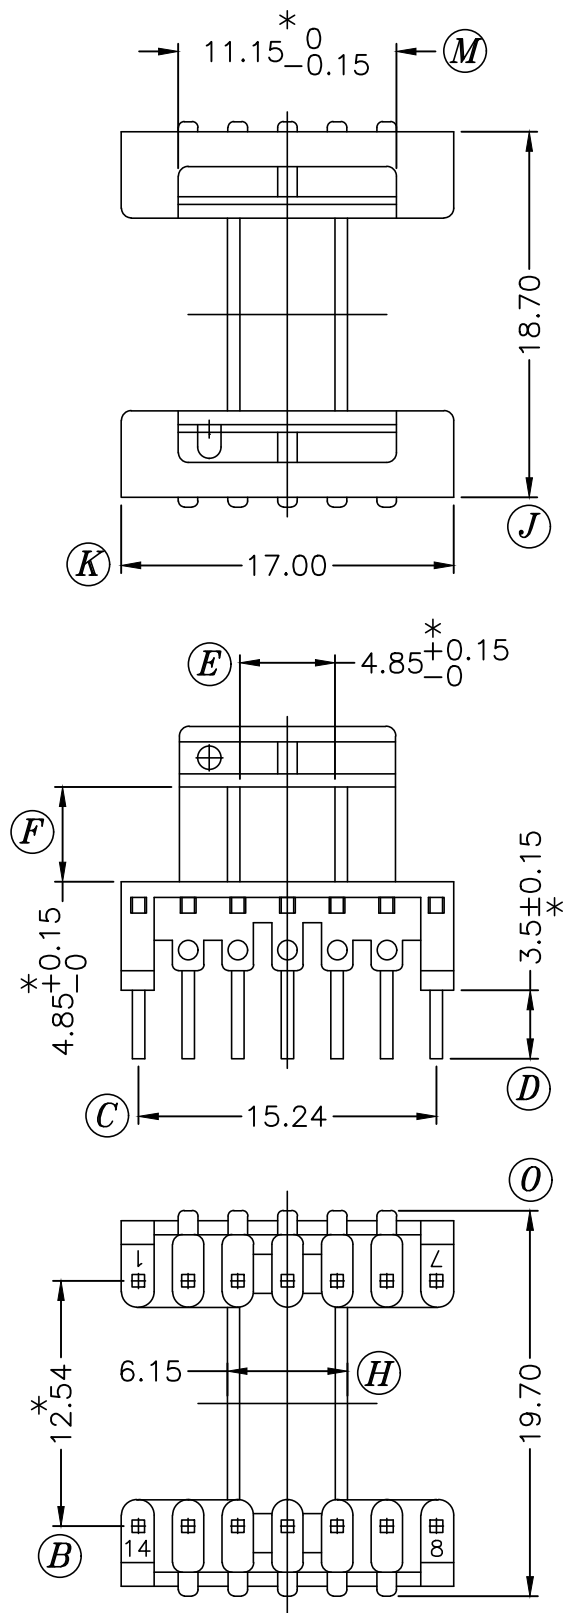

LIST	BOBBIN MATERIAL	UL REC
1	PA66 70G33L	UL 94HB
2	PA66 A3X2G7	UL 94-V0
3	PA66 FR50	UL 94-V0
4	PA66 A3X2G5	UL 94-V0

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	LENGTHEN THE BULGE	'03.01.24	4	UPDATE THE DRAWING.	'10.10.21
2	BOBBIN MATERIAL: PA (S223-HG7)->PA66 70G33L	'05.03.24	5	UPDATE THE DRAWING.	'10.11.03
3	UPDATE THE DRAWING.	'09.07.01			

DRAWN & DRAFTED BY	NI FEN LI	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN EF-16		
CHECKED & APPROVED BY	4<L≤16 ±0.2	UNIT:		BOBBIN MATERIAL:	UL REC.		
	16<L≤63 ±0.3	MM		PA66 70G33L	/		
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				SZ	CP WIRE	1.5KG MIN	
					DATE:	DRAWING NO.	REV.
					NOV.03 '2010	P-1621-1	5