

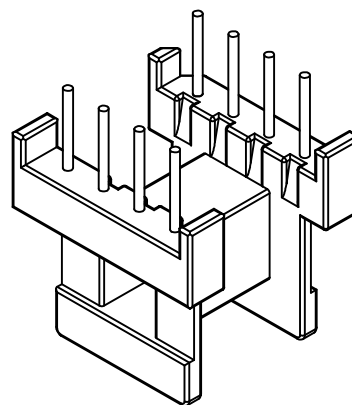
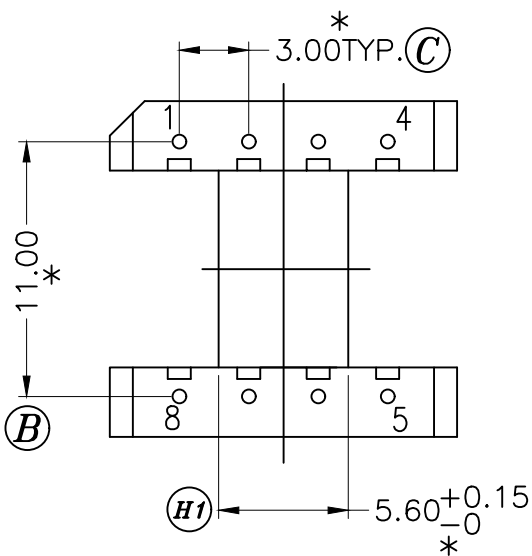
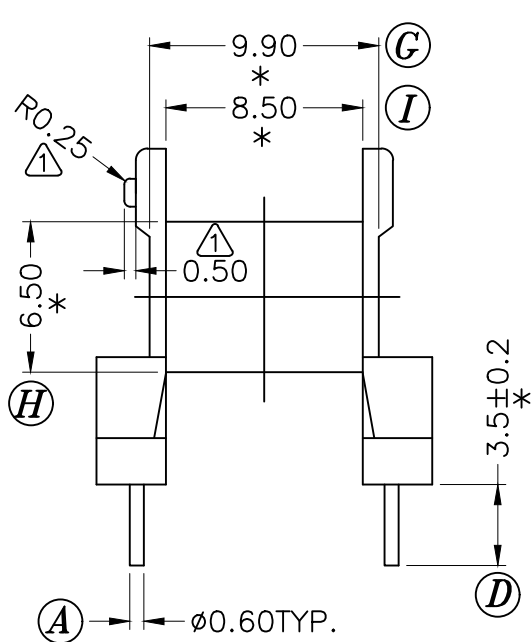
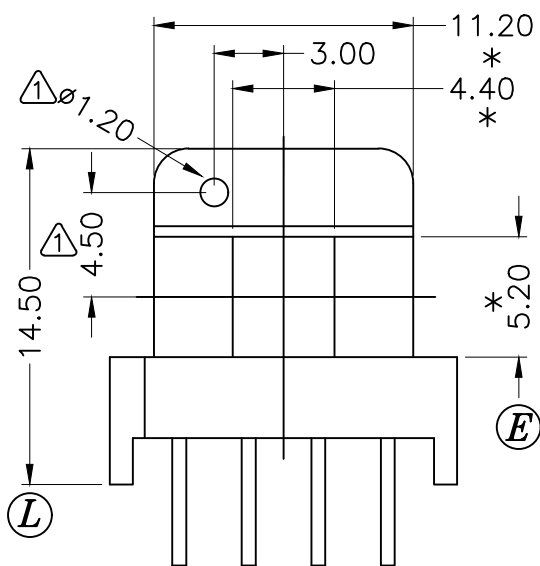
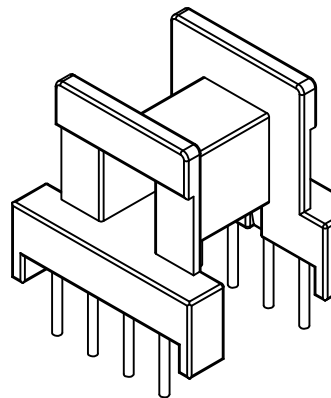


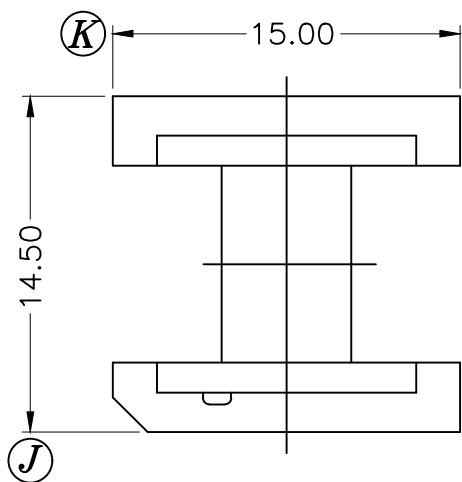

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(E):5.6+0.1/-0 ->5.6+0.15/-0		4	UPDATE THE DRAWING.	'09.05.06
2	CANCEL (O),(N); UPDATE THE DRAWING		5	增加凸點,增加材質,見 1 處.	'12.05.11
3	UPDATE THE DRAWING.	'07.11.23	6	材質設變為T375HF	'14.07.03

DRAWN & DRAFTED BY	ZHANG LIANGBIN	TOLERANCES		ANGLE:	TITLE:		
CHECKED & APPROVED BY		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN EE-16H		
		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:	UL REC.	
		16<L≤63 ±0.3		MM	PHENOLIC T375HF	UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				SZ	CP WIRE	1.5KG MIN	
					DATE:	DRAWING NO.	REV.
				07.03 '2014	P-1632	6	



PIN SHINE INDUSTRIAL CO.,LTD.

TEL:886-2-22990545

FAX:886-2-22990546