

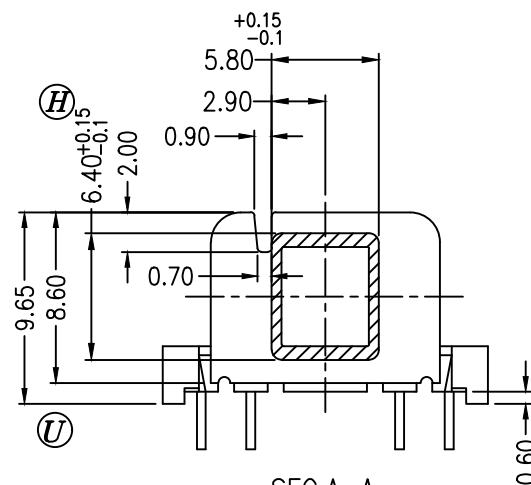
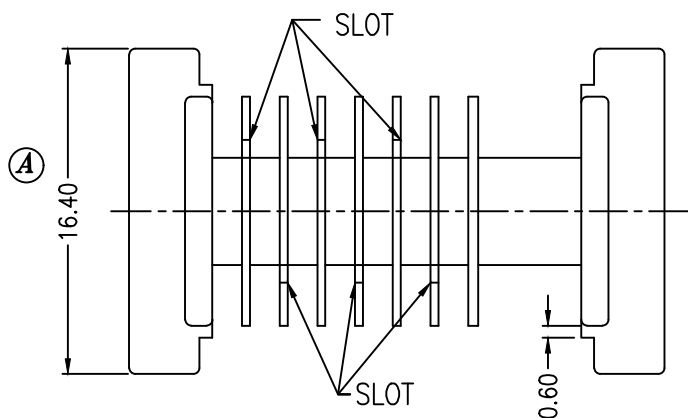


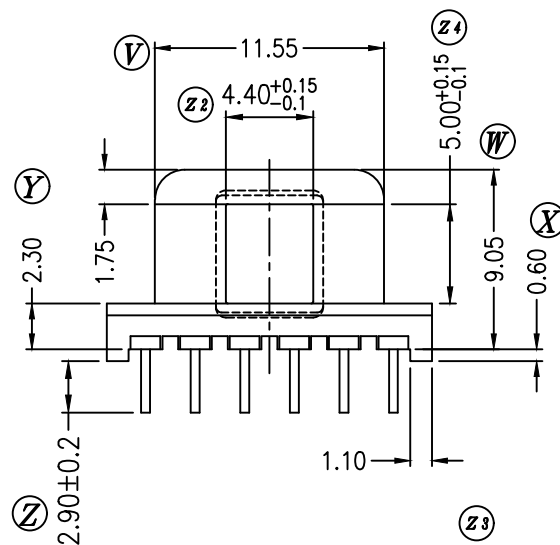

SEC.A-A

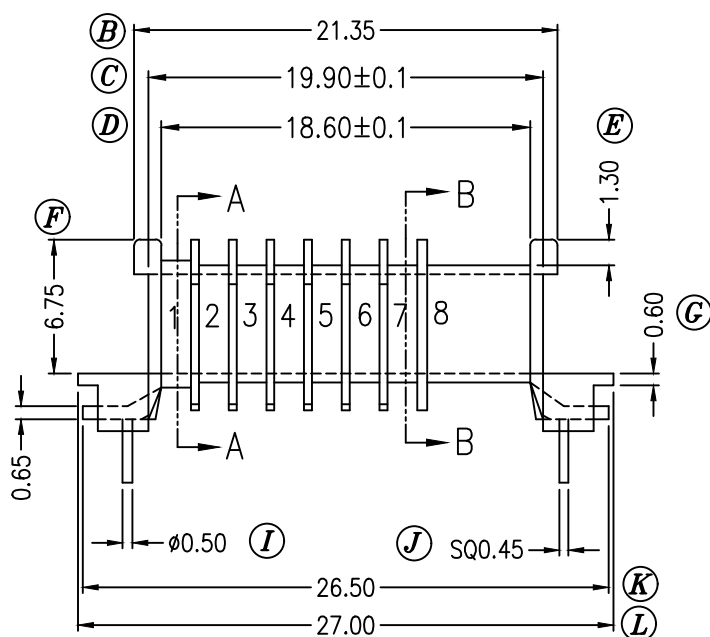


SEC.B-B

WINDING PIPE THICKNESS

1: $t_1=t_2=t_3=t_4= 0.7\pm0.05$
2,3,4,5,6,7,8: $t_1=t_2=t_3=t_4= 0.55\pm0.05$

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	ADD PIN NUMBER.		'05.03.10				
2	△AMEND PIN NUMBER.		'08.07.07				

DRAWN & DRAFTED BY	DENG GUI ZHEN	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	EEL-16H		
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:		UL REC.
		16<L≤63 ±0.3		MM	LCP E4008		UL 94V-0
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:
				DG	CP WIRE		0.8 KG MIN
					DATE:	DRAWING NO.	REV.
					APR03. '2004	P-1646	2



PIN SHINE INDUSTRIAL CO.,LTD.

TEL:886-2-22990545

FAX:886-2-22990546