
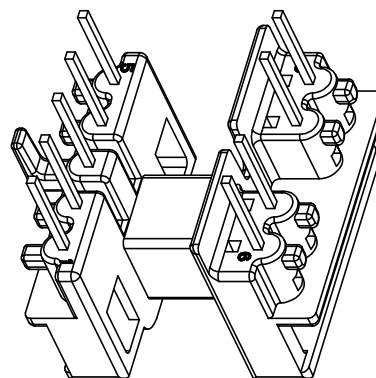
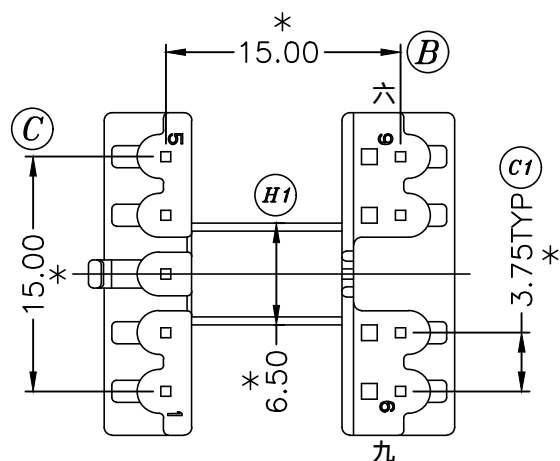
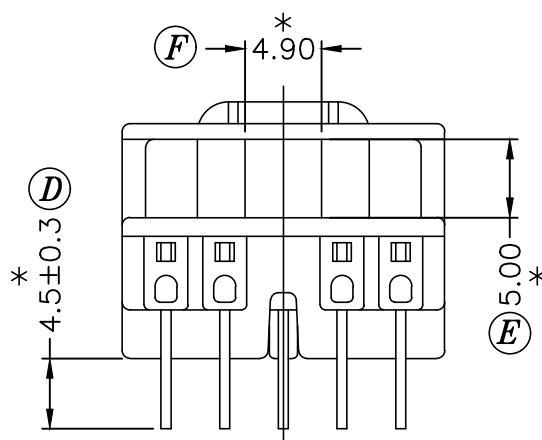
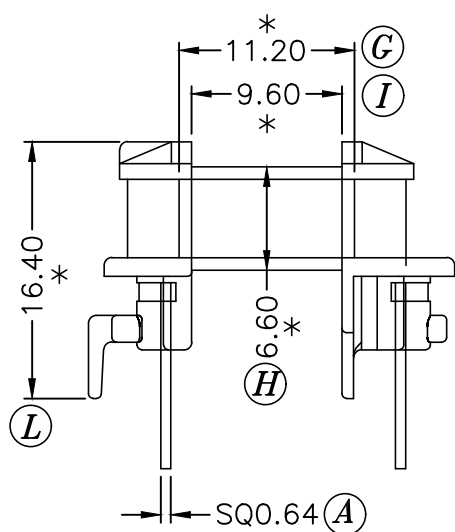
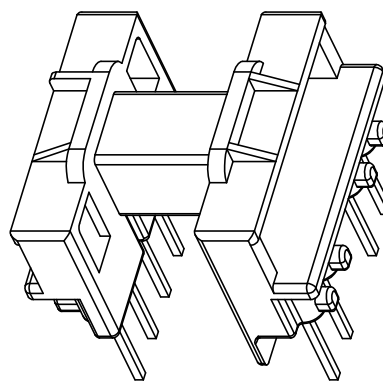
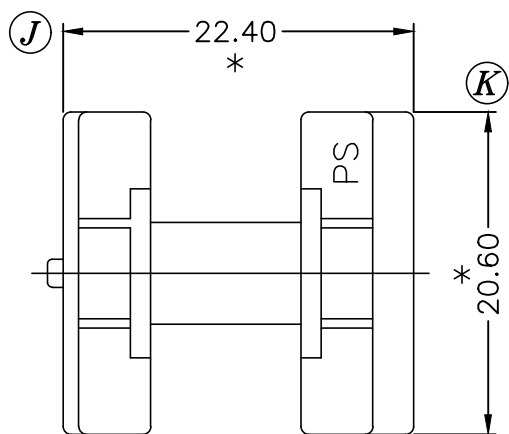




A	PA66 A3X2G7
B	PET FR530 NC

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	UPDATE THE DRAWING.	'08.03.09			
2	增加材質	'12.09.11			

DRAWN & DRAFTED BY	LIU DE LIN	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN EF-16		
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:	UL REC. UL 94V-0	
		16<L≤63 ±0.3		MM			
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				SZ	CP WIRE	1.5KG MIN	
					DATE:	DRAWING NO.	REV.
	12.09 '2011	P-1649	2				