
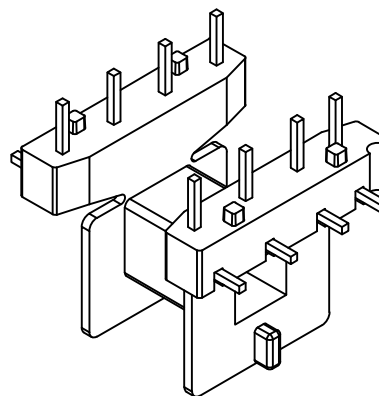
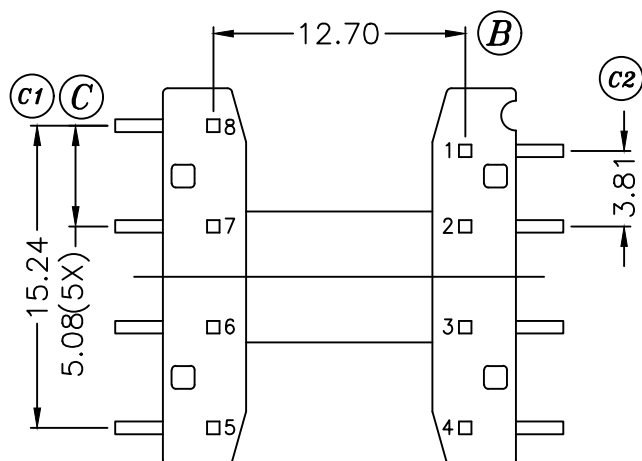
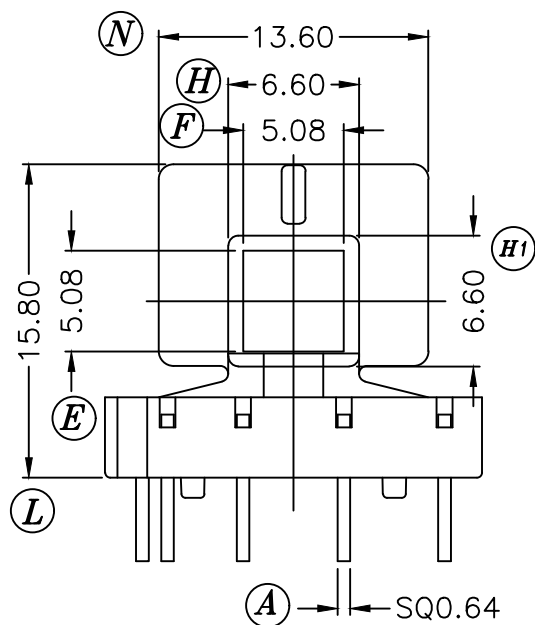
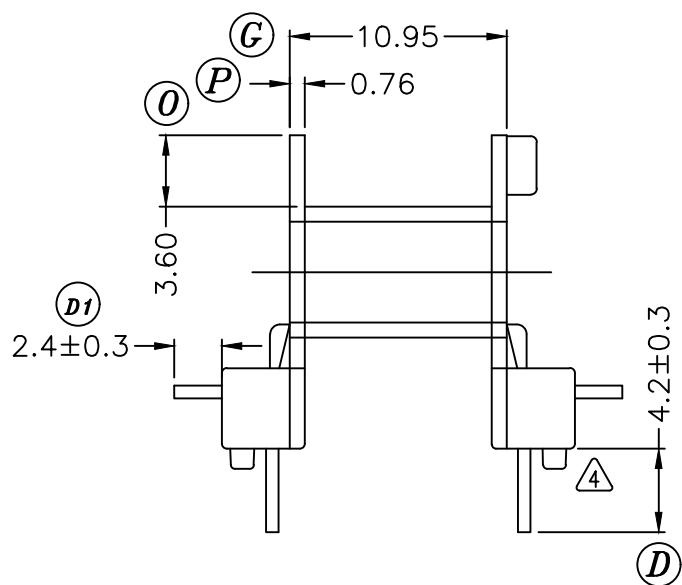
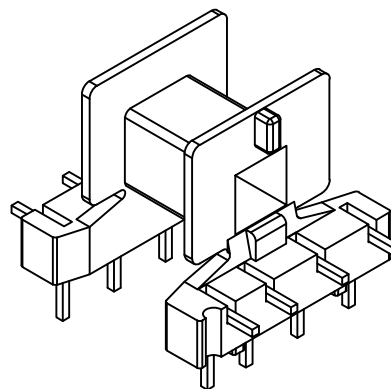


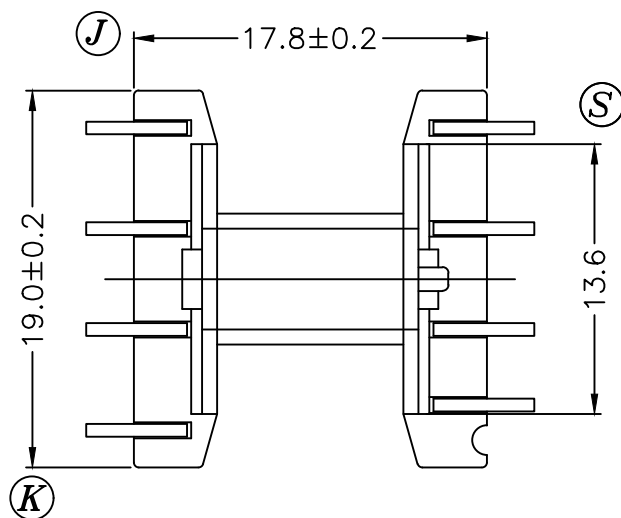

B-065.101F

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	CANCEL (C2),(M); CHANGE (C3)->(C2); PIN TENSION LOAD			3	UPDATE DRAWING		'07.05.25
	0.9KG ->1.5KG; UPDATE DRAWING.			4	CORRECT DRAWING		'07.09.21
2	UPDATE DRAWING		'04.12.08				

DRAWN & DRAFTED BY	DONG CF	TOLERANCES	ANGLE: $\pm 1^\circ$	TITLE:	L TYPE BOBBIN EE-19/8/5		
CHECKED & APPROVED BY	JOHN RONG	$0 < L \leq 4 \pm 0.1$ $4 < L \leq 16 \pm 0.2$ $16 < L \leq 63 \pm 0.3$	pin pitch ± 0.2	UNIT:	BOBBIN MATERIAL:	UL REC.	
				MM	PET FR530	UL 94V-0	
			ORIGIN: DG	PIN MATERIAL:	CP WIRE	PIN TENSION LOAD:	1.5KG MIN
PIN SHINE INDUSTRIAL CO., LTD. TEL: 886-2-22990545 FAX: 886-2-22990546				DATE:	DRAWING NO.	REV.	
				APR.01'2003	P-1923	4	