

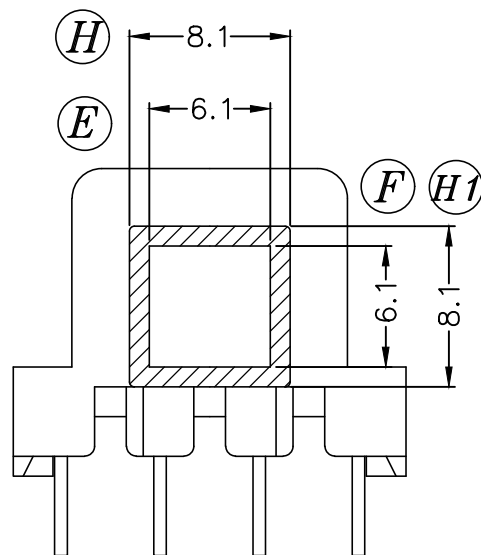
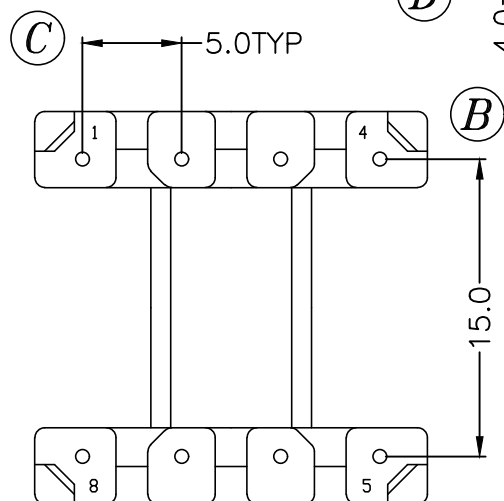
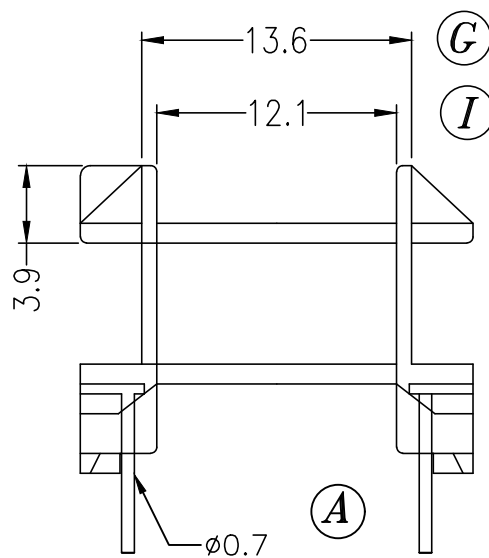
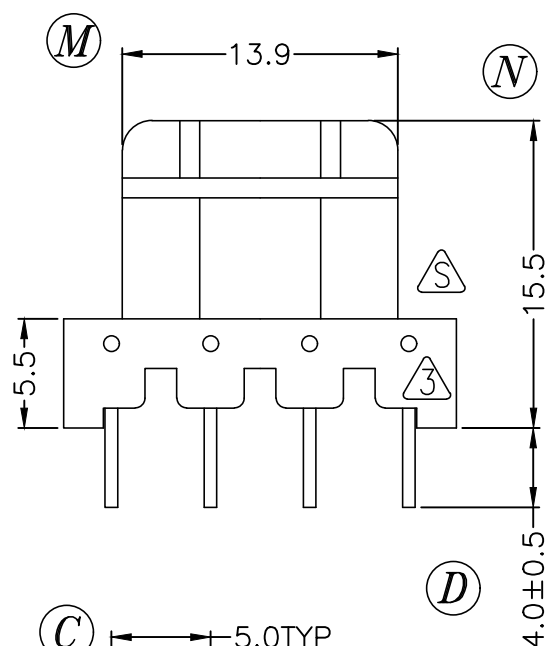


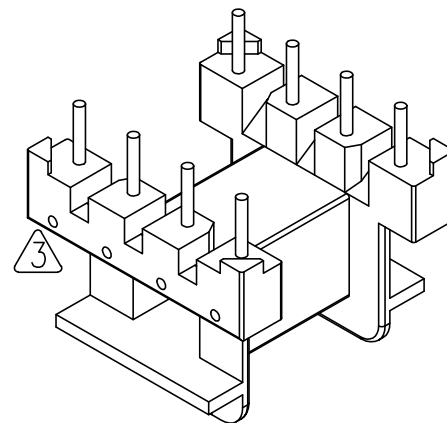

A-B SEC.

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	△ SHAPE MODIFIED						
2	△ 修正客戶材質顏色要求		2007.06.23				
3	△ 根據實物修改透氣孔結構:方孔-->圓孔		2009.04.08				

DRAWN & DRAFTED BY	ZHOU ZHENG SHENG	TOLERANCES	ANGLE: $\pm 1^\circ$	TITLE: T-H BOBBIN EF-20H (8 PIN)			
CHECKED & APPROVED BY		$0 < L \leq 4 \quad \pm 0.1$ $4 < L \leq 16 \quad \pm 0.2$ $16 < L \leq 63 \quad \pm 0.3$	pin pitch ± 0.2	UNIT: MM	BOBBIN MATERIAL: PET FR530(BK/NC)△	UL REC. UL 94V-0	
ORIGIN: DG				PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.5kg MIN		
DATE: JUN.03.2005				DRAWING NO. P-2005		REV. 3	

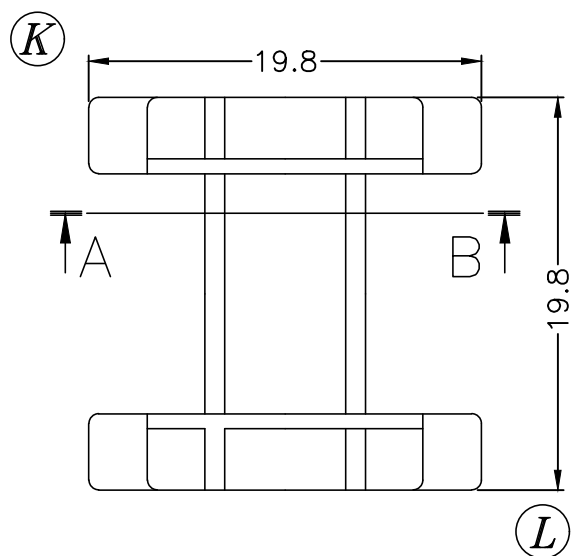

PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546

