
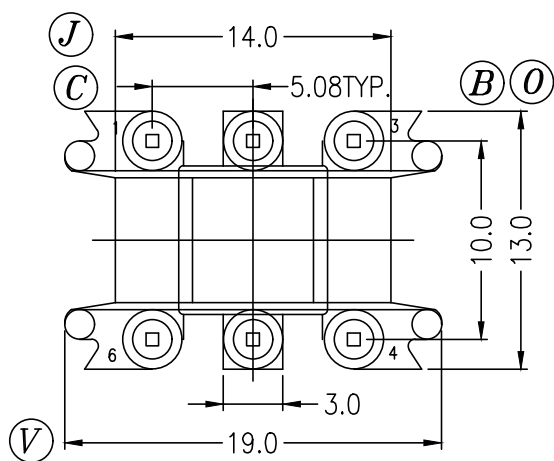
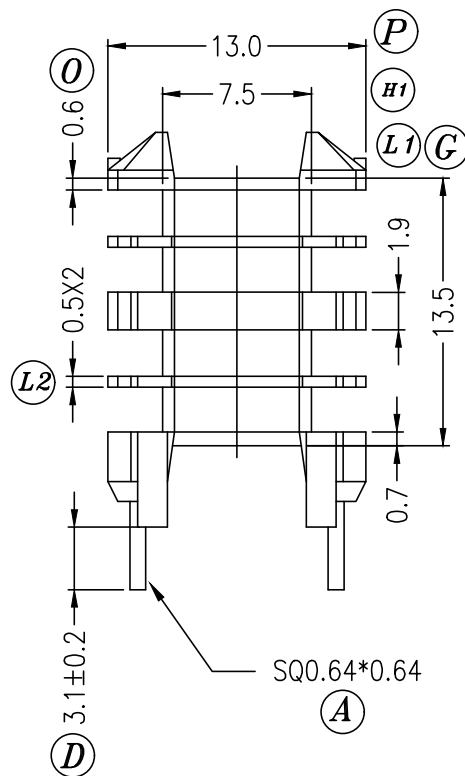
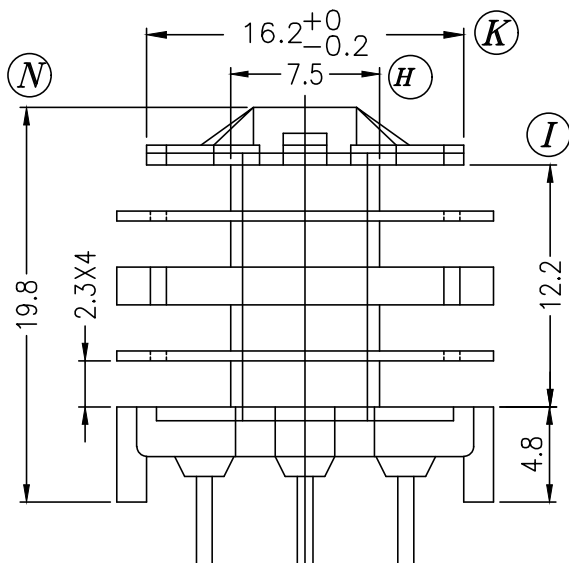
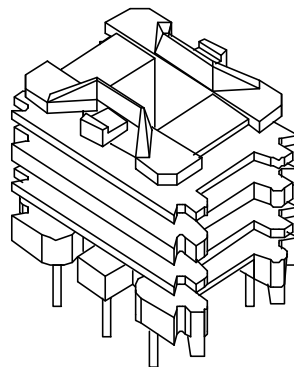


REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(J): 15.0 -->14.0		4	(J): Cancel (R)(W),UPDATE DRAWING	
2	(J): 14.0 -->14.0 ^{+0/-0.1}		5	EPCOS :ADD THINK 0.5-->0.6	
3	(K):16.0-->16.2(G):13.4-->13.5(J) : 14.0 ^{+0/-0.1} -->14.0				

DRAWN & DRAFTED BY	LI HU	TOLERANCES	ANGLE: $\pm 1^\circ$	TITLE: BOBBIN EF-20 (4 GROOVES)	
CHECKED & APPROVED BY	JOHN RONG	$0 < L \leq 4 \pm 0.1$ $4 < L \leq 16 \pm 0.2$ $16 < L \leq 63 \pm 0.3$	PIN PITCH ± 0.2	BOBBIN MATERIAL: PET (FR-530)	UL REC. UL 94V-0
ORIGIN: DG			PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.5KG MIN	
DATE: JUNE.5 '2004			DRAWING NO. P-2007-1	REV. 5	

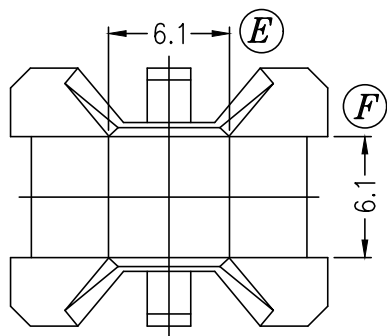

PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546

