

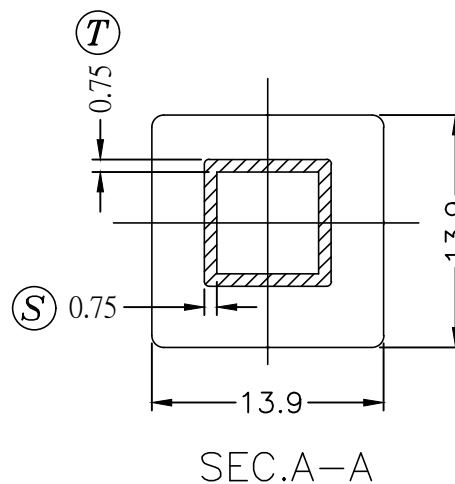
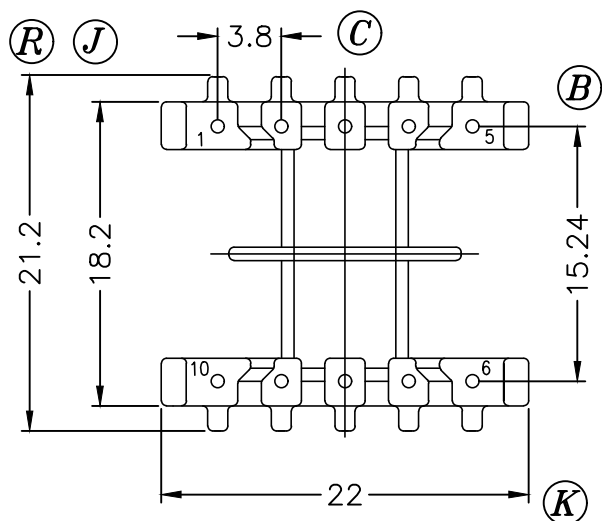
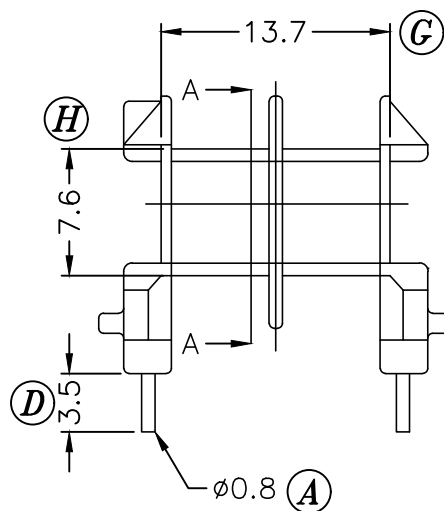
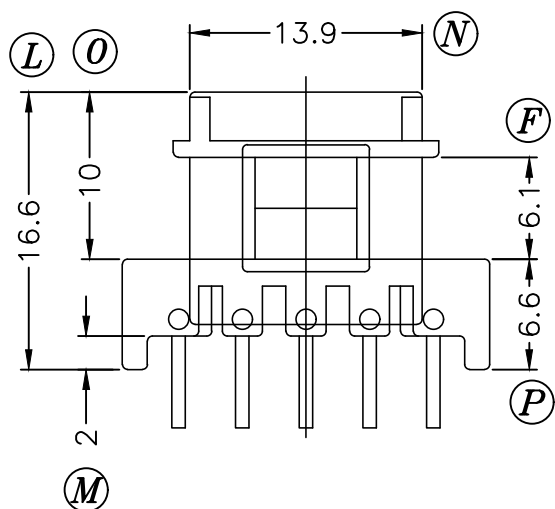


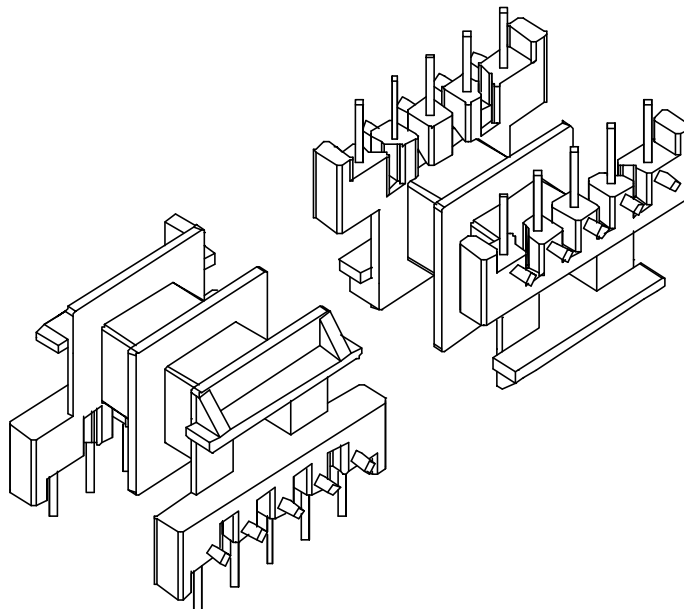

SEC.A-A

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	ADD CUTTING DRAWING.						
2	ADD WALL THICKNESS DIM.						

DRAWN & DRAFTED BY	HUANG Y Z	TOLERANCES		ANGLE: ±1°	TITLE: T-H BOBBIN EF-20 (2 SEC)			
		0<L≤4 ±0.1	PIN PITCH					
CHECKED & APPROVED BY	JOHN RONG	4<L≤16 ±0.2	±0.2	UNIT: MM	BOBBIN MATERIAL: PHENOLIC T355J		UL REC.	
		16<L≤63 ±0.3					UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN: DG	PIN MATERIAL: CP WIRE		PIN TENSION LOAD: 1.5KG MIN	
					DATE: JUL.25 '2003		DRAWING NO. P-2014	REV. 2

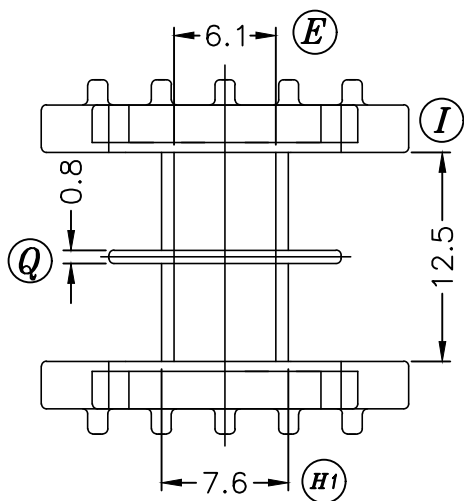

PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546

