
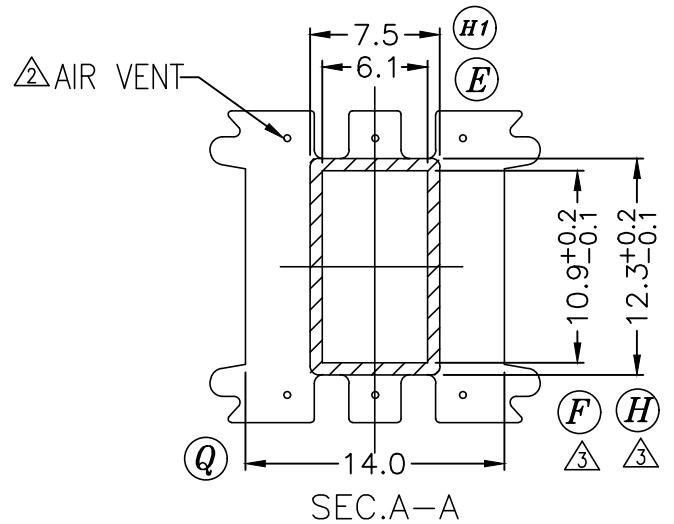
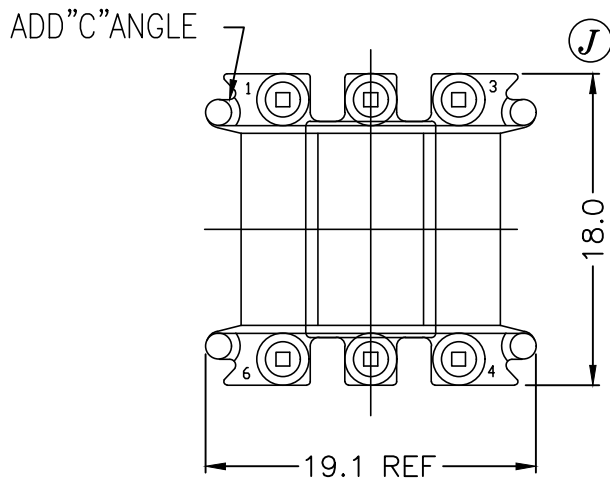
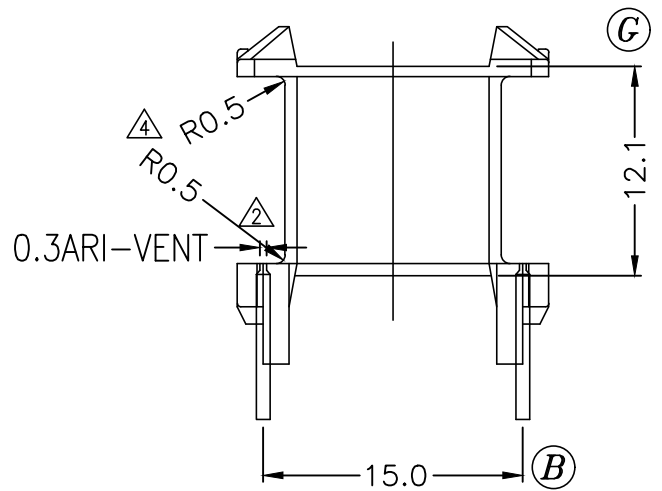
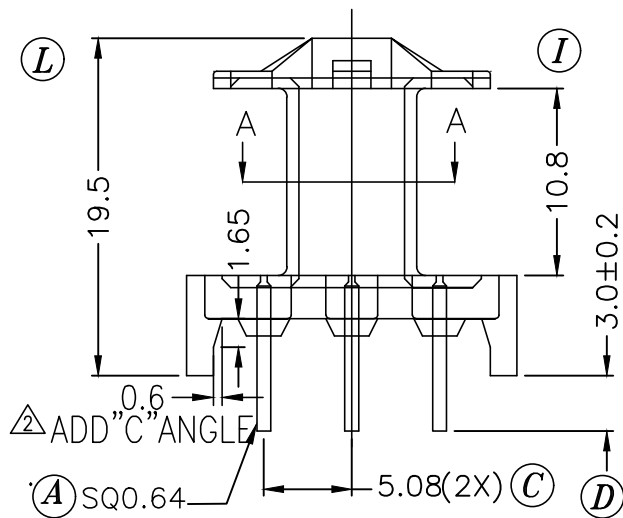
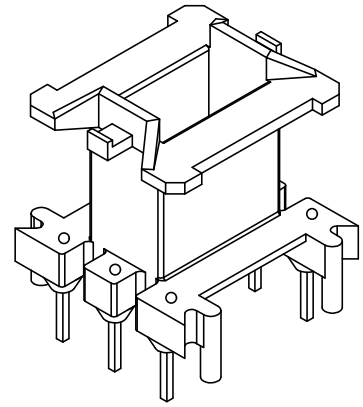


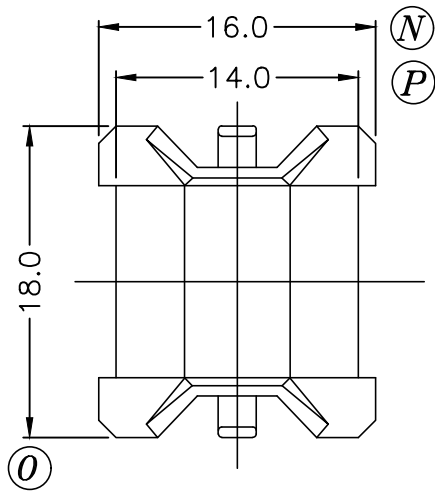

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	CANCEL (Q),(M),(T),(R),(K),(S); UPDATE DRAWING	02.3.15	4	ADD ANGLE. $\triangle$	06.08.15
2	$\triangle$ (1)ADD C;(2) ADD HOLES ON THE PIN BASE.	04.3.26			
3	DIM(F)11.1±0.2-->10.9 $^{+0.20}_{-0.10}$; DIM(H)12.5±0.2-->12.3 $^{+0.20}_{-0.10}$	04.6.23			

DRAWN & DRAFTED BY	SUN YE GAO	TOLERANCES		ANGLE:	TITLE: T-H BOBBIN EF-20		
		0<L≤4 ±0.1	pin pitch ±0.2	UNIT:			
CHECKED & APPROVED BY		4<L≤16 ±0.2		MM	BOBBIN MATERIAL:	UL REC.	
		16<L≤63 ±0.3			PA66 A3X2G7	UL 94V-0	
PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				DG	CP WIRE	1.5KG MIN	
					DATE:	DRAWING NO.	REV.
					SEP.07'2004	P-2020	4