

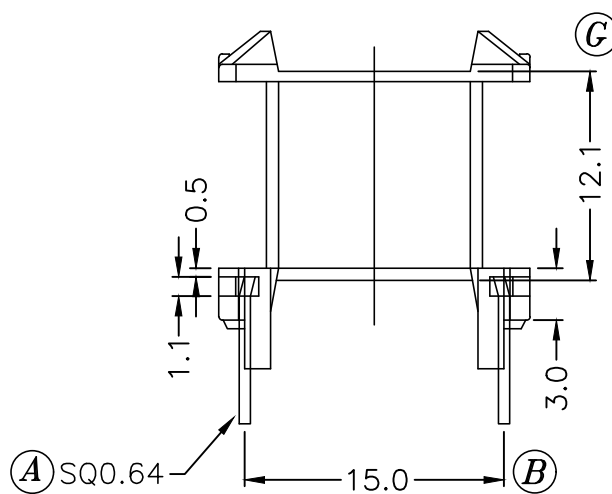
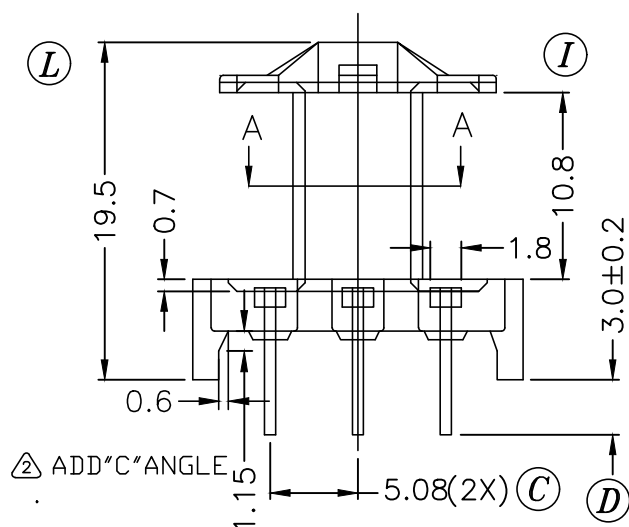
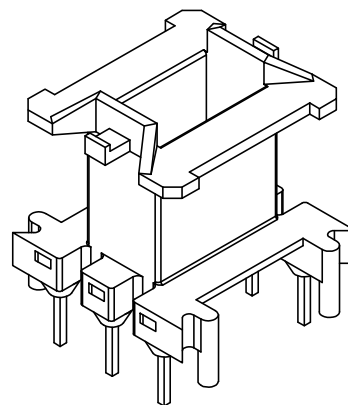
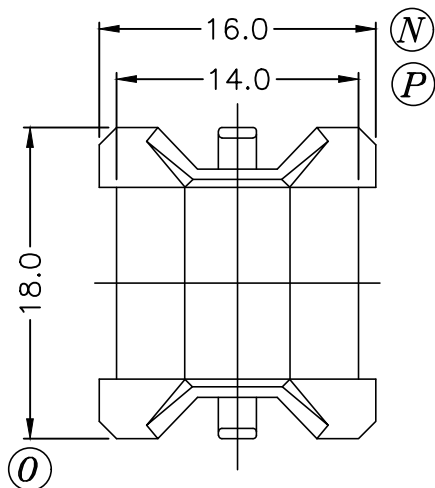


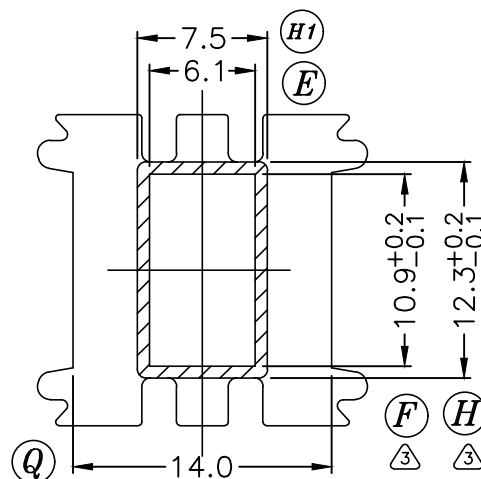

ADD "C" ANGLE

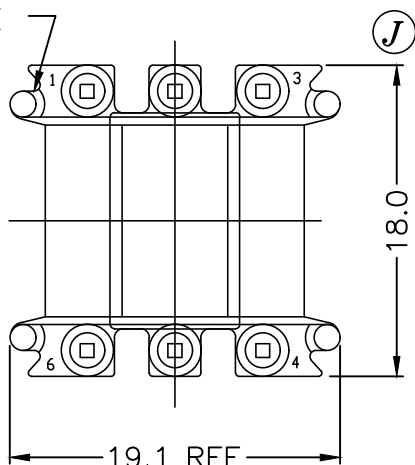

SEC.A-A

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	CANCEL (Q),(M),(T),(R),(K),(S); UPDATE DRAWING	02.3.15	4	change air-hole sition from pin top to pin side, (R) 2.5-->3.0	05.1.02
2	(2) (1)ADD C;	04.3.26	5	UPDATE DRAWING	07.06.28
3	DIM(F)11.1±0.2-->10.9 ^{+0.20} _{-0.10} ;DIM(H)12.5±0.2-->12.3 ^{+0.20} _{-0.10}	04.6.23			

DRAWN & DRAFTED BY	He Qihui	TOLERANCES		ANGLE:	TITLE: T-H BOBBIN EF-20		
		0<L≤4 ±0.1	pin pitch ±0.2	UNIT:			
CHECKED & APPROVED BY		4<L≤16 ±0.2		MM	BOBBIN MATERIAL:	PA66 A3X2G7	UL REC. UL 94V-0
		16<L≤63 ±0.3		ORIGIN: DG	PIN MATERIAL:	CP WIRE	PIN TENSION LOAD: 1.5KG MIN
PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				DATE: JAN.02'2005		DRAWING NO. P-2020-1	REV. 5