
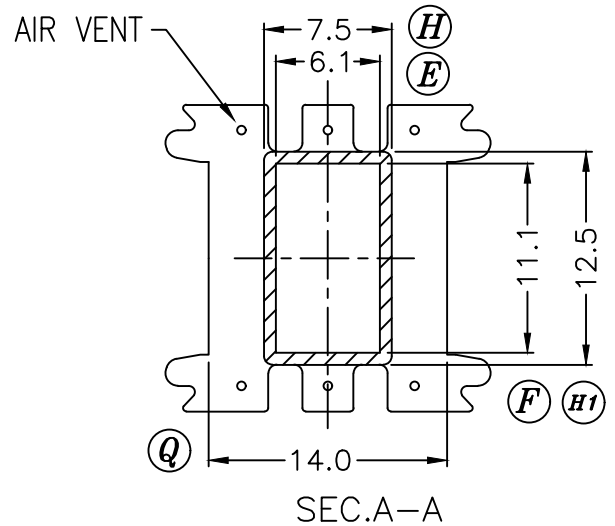
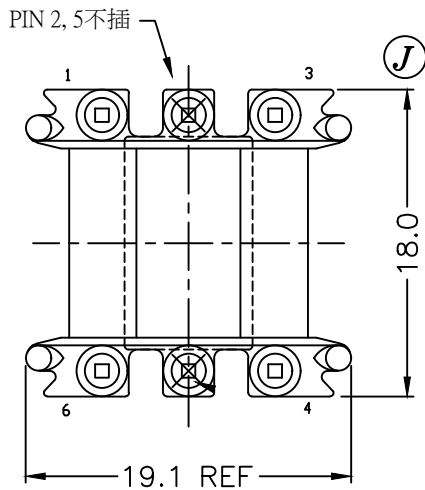
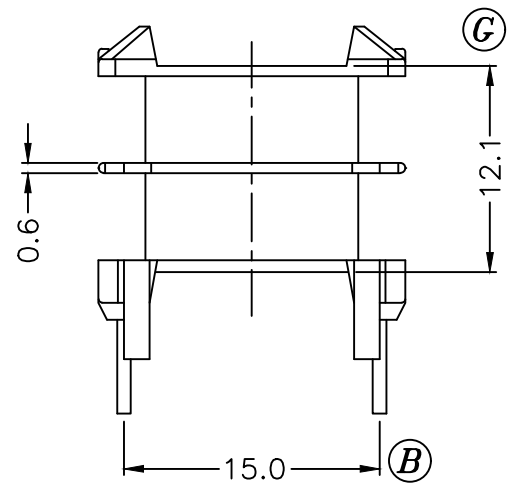
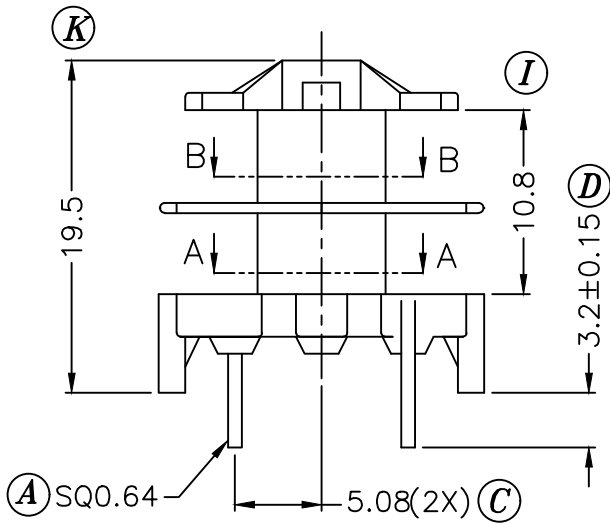
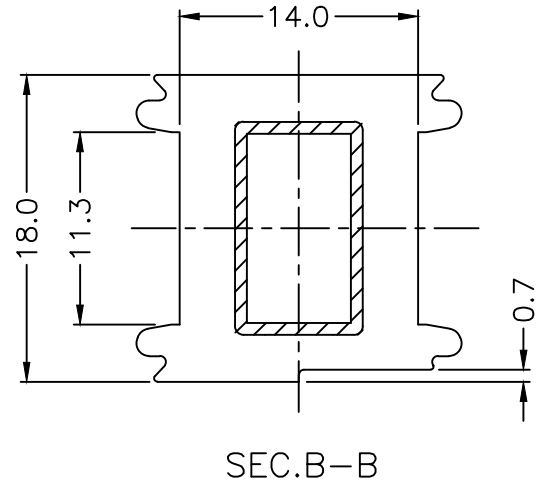
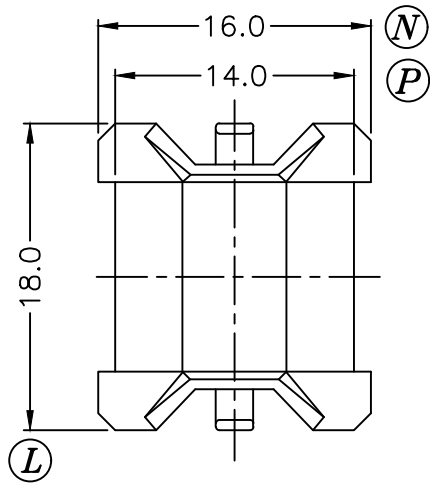




REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	ADD ONE MORE MATERIAL "PA66 A3X2G7"		3	设变脚长公差(3.2±0.3-->3.2±0.15)	'11.01.25
	△ ADD AIR VENT ON TNE PIN HOLE	'04.06.04			
2	UPDATE DRAWING	'07.09.28			

DRAWN & DRAFTED BY	YANG ZHI	TOLERANCES		ANGLE:	TITLE:			
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN EF-20			
CHECKED & APPROVED BY	4<L≤16 ±0.2	UNIT:		BOBBIN MATERIAL:		UL REC.		
	16<L≤63 ±0.3	MM		PET FR530 / PA66 A3X2G7		UL 94V-0		
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:	
				DG	CP WIRE		1.2KG MIN	
					DATE:	DRAWING NO.	REV.	
					FEB.27'2004	P-2040	3	