

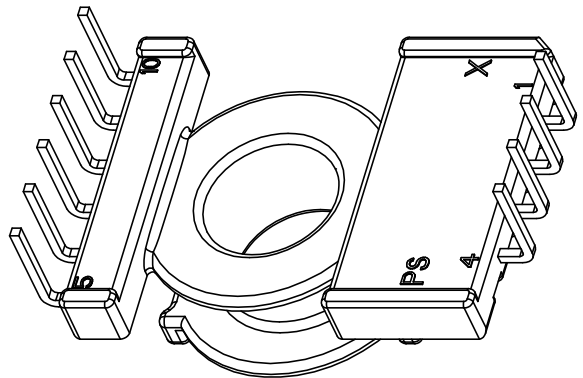
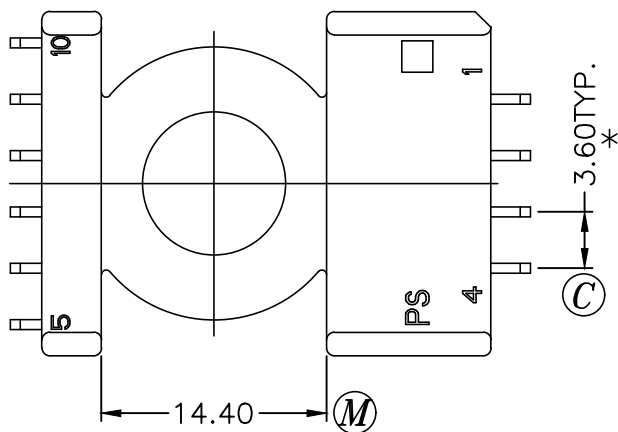
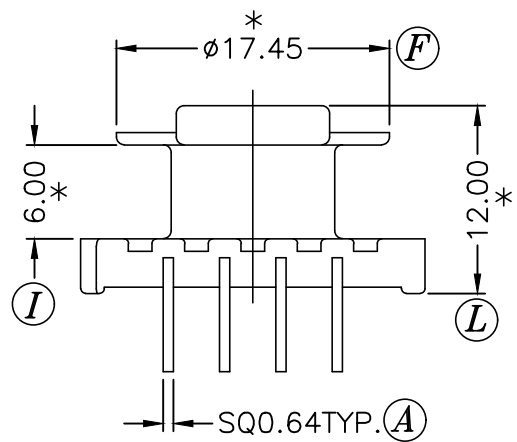
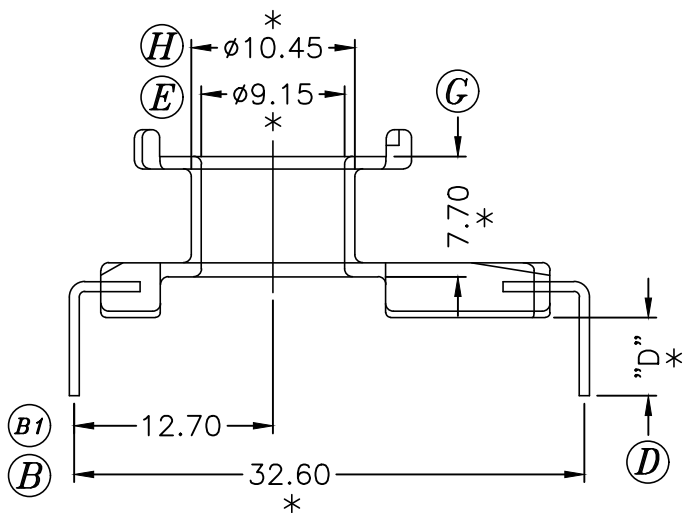


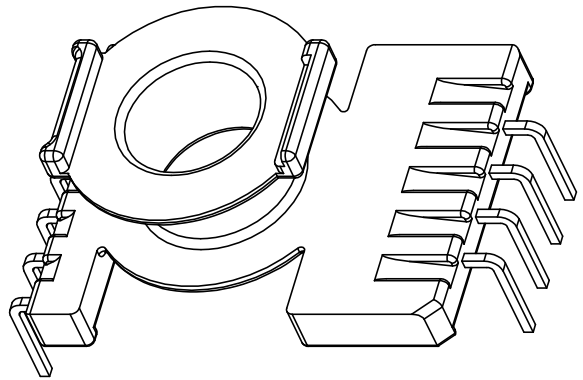

序號	"D"
1	5.0±0.3
2	4.0±0.2

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	(J):27.20->28.70; (B1):13.75->12.70		'08.10.28				
2	UPDATE THE DRAWING.		'09.02.05				

DRAWN & DRAFTED BY	HOU YI MIN	TOLERANCES		ANGLE:	TITLE:			
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	L TYPE BOBBIN EQ-20			
CHECKED & APPROVED BY	4<L≤16 ±0.2	UNIT:		BOBBIN MATERIAL:		UL REC.		
	16<L≤63 ±0.3	MM		PHENOLIC PM9630		UL 94V-0		
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:	
				SZ	CP WIRE		1.0KG MIN	
					DATE:	DRAWING NO.	REV.	
					MAY.09 '2008	P-2050	2	

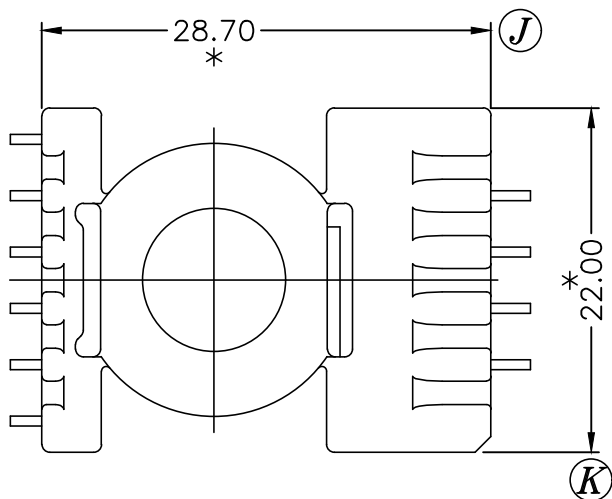

PIN SHINE INDUSTRIAL CO.,LTD.

TEL:886-2-22990545

FAX:886-2-22990546