
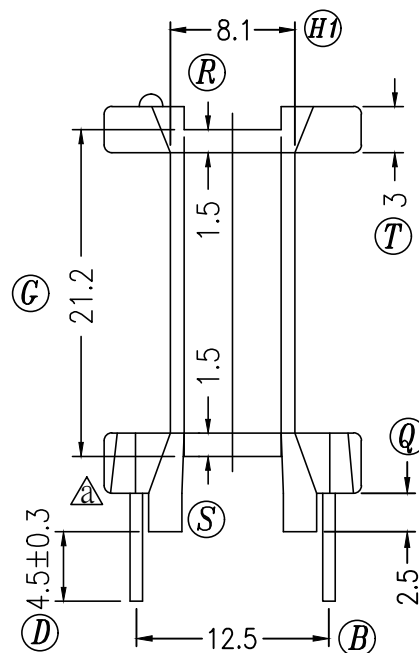
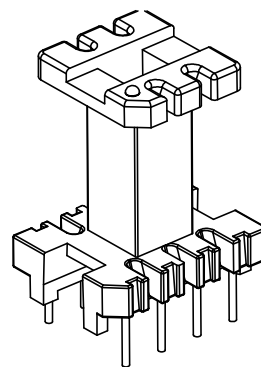


REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	MODIFY :			4	8.8改為10.4,過線槽R角改為0.8MM,標記		
2	原品名P-2208改為P-2209			5	材質設變, T375J改為T375HF		
3	頂部加一個定位凸點						


DRAWN & DRAFTED BY	LIU DE LIN	TOLERANCES	ANGLE: $\pm 1^\circ$	TITLE: T-H BOBBIN EI-22			
CHECKED & APPROVED BY		$0 < L \leq 4 \pm 0.1$ $4 < L \leq 16 \pm 0.2$ $16 < L \leq 63 \pm 0.3$	pin pitch ± 0.2	BOBBIN MATERIAL:	UL REC. UL 94V-0		
				PHENOLIC (T375HF)			
				PIN MATERIAL:	PIN TENSION LOAD: 1.5KG MIN		
				CP WIRE			
				DATE: 03.04 '2014	DRAWING NO. P-2209	REV. 5	

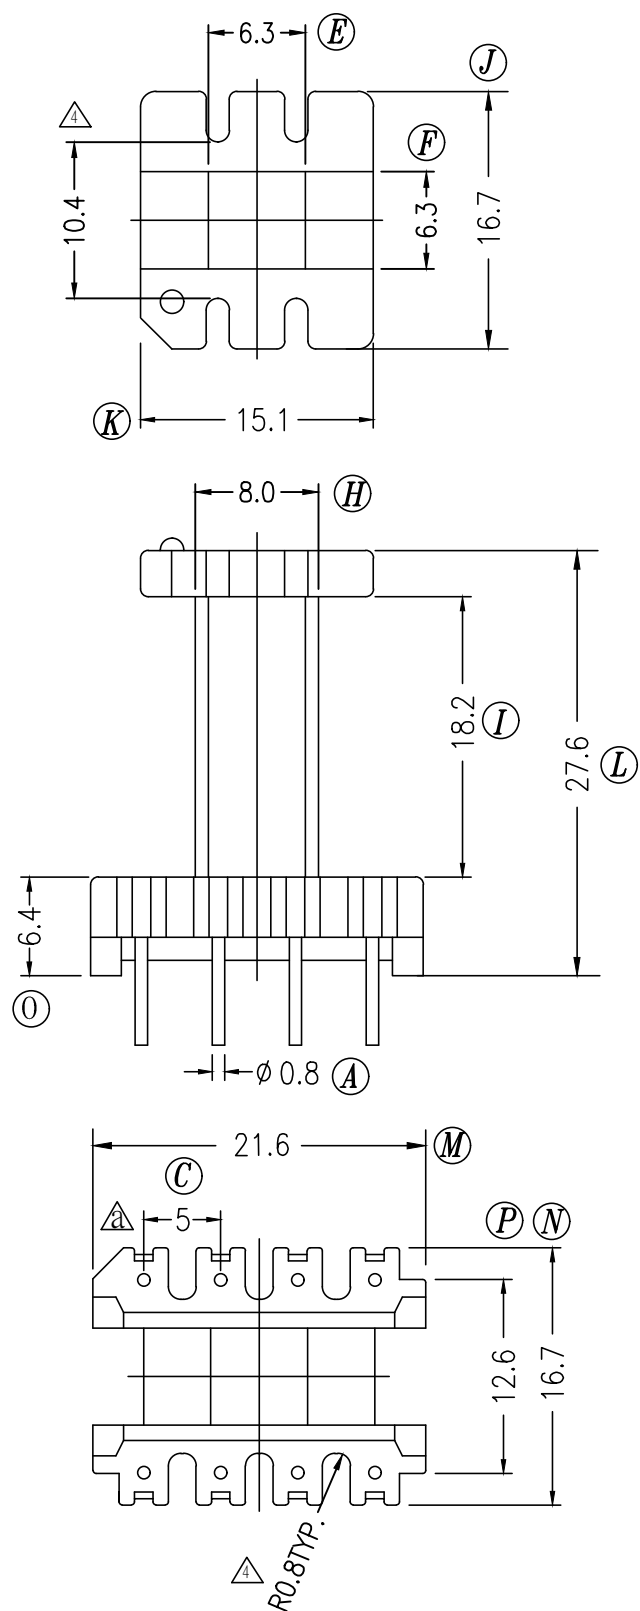

PIN SHINE INDUSTRIAL CO.,LTD.

TEL:886-2-22990545

FAX:886-2-22990546



DATE: 03.04 '2014

DRAWING NO.

P-2209

REV. 5