
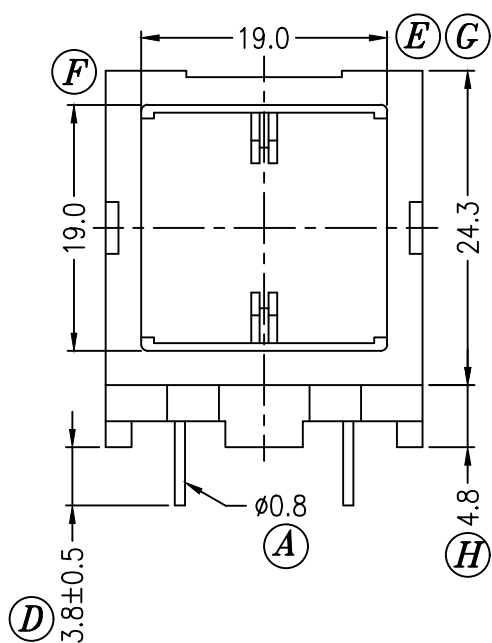

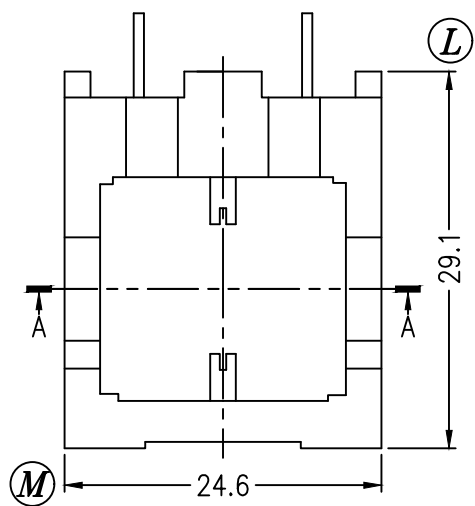
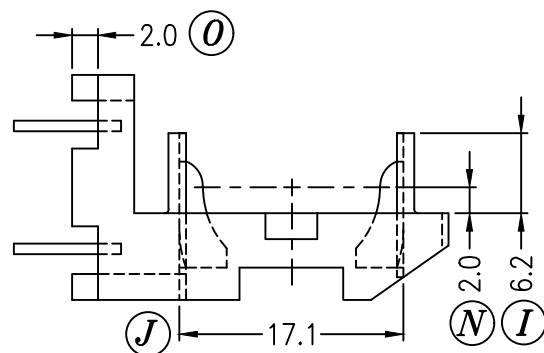


PART P-2401

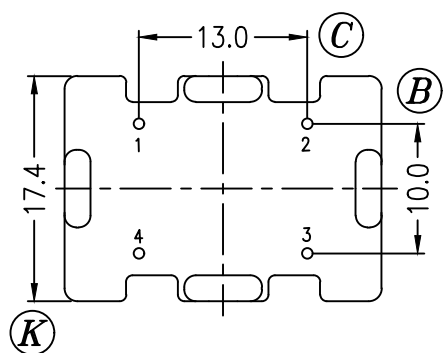

SEC. A-A

REV.	REVISIONS	REC.	REV.	REVISIONS	REC.
2	(E):19.2→19.0				

DRAWN & DRAFTED BY	WNCH HSIANG	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	ET-24V (BASE)		
CHECKED & APPROVED BY	CHIN TE	4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL: PHENOLIC (T375J)	UL REC. UL 94V-0	
		16<L≤63 ±0.3		MM			
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				SCALE:	PIN MATERIAL:	PIN TENSION LOAD:	
				1.6/1	CP WIRE	1.5kg MIN.	
					DATE:	DRAWING NO.	REV.
		JUL.09 1997	P-2405	2			