

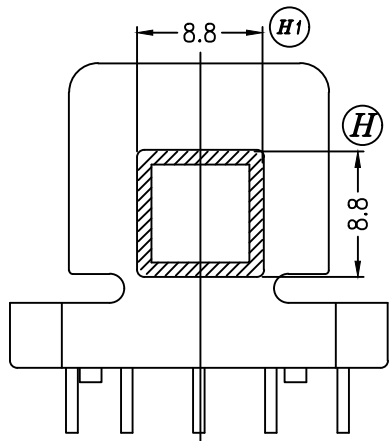
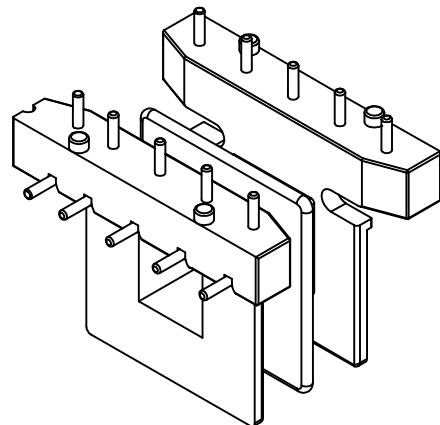
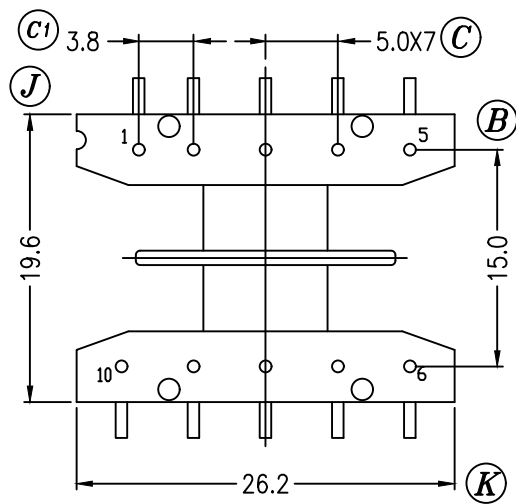
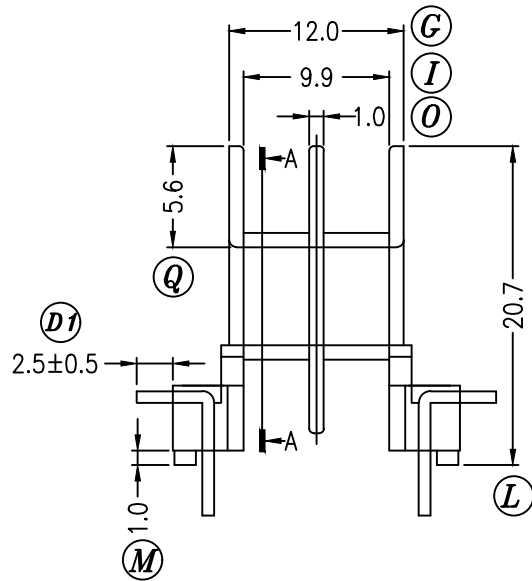
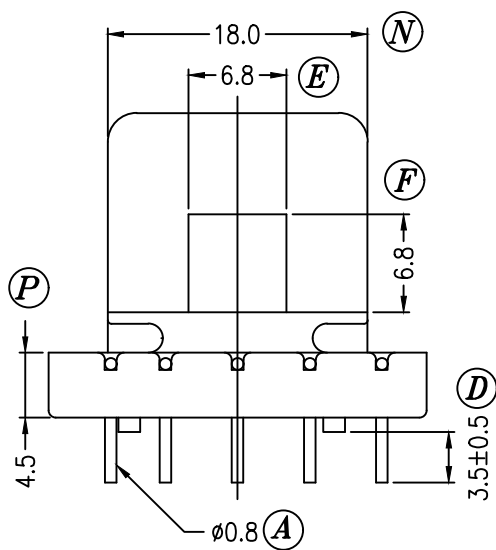


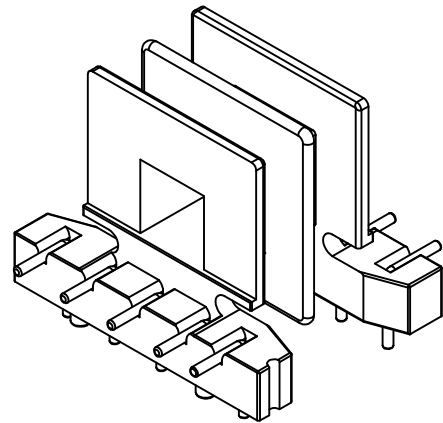

SEC. A-A



REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	UPDATE DRAWING		06.6.30				

DRAWN & DRAFTED BY	XIE SHU BO	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	BOBBIN EE-25H (2 GROOVES)		
CHECKED & APPROVED BY	4<L≤16 ±0.2	UNIT:		BOBBIN MATERIAL:	UL REC.		
	16<L≤63 ±0.3	MM		PBT 4130	UL 94V-0		
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				DG SZ	CP WIRE	1.5KG MIN	
					DATE:	DRAWING NO.	REV.
					MAR.15'1998	P-2503-1	1