

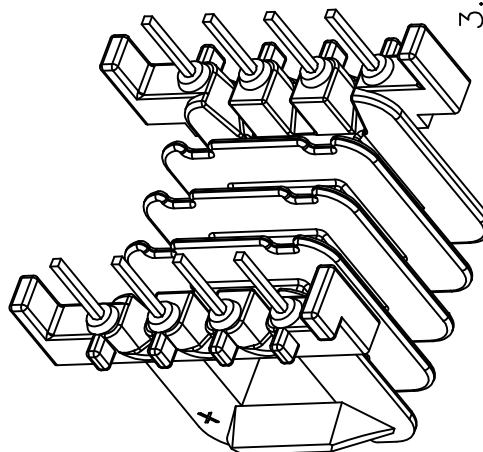
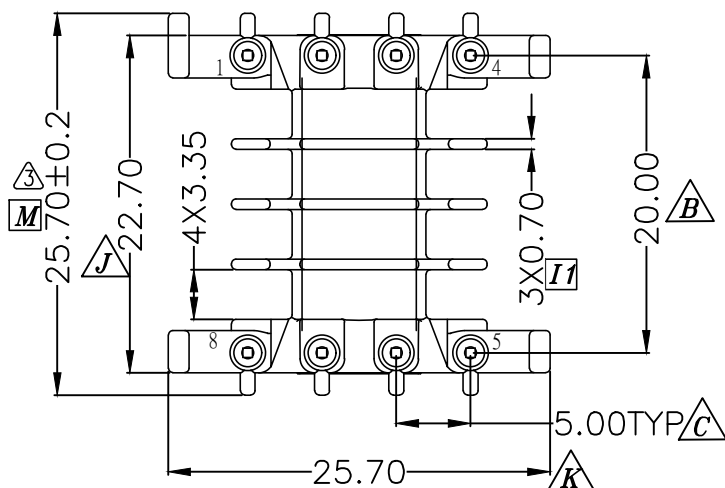
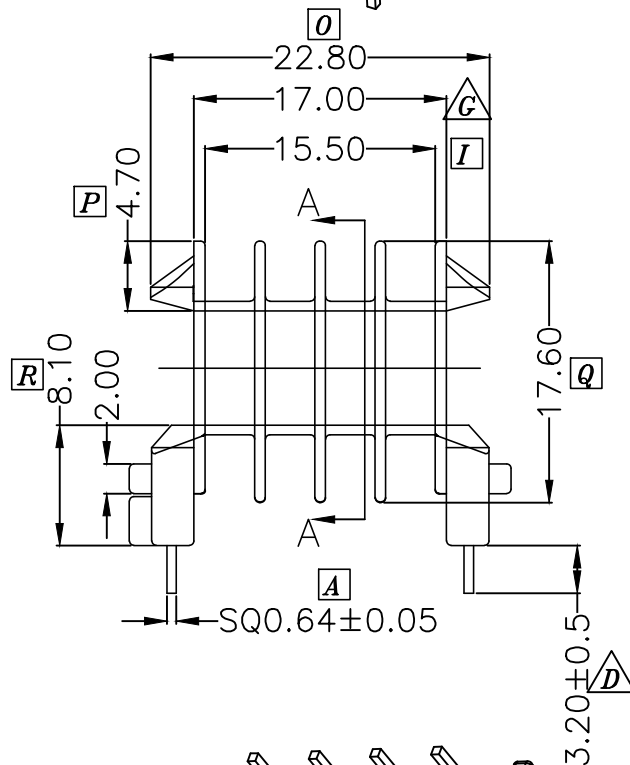
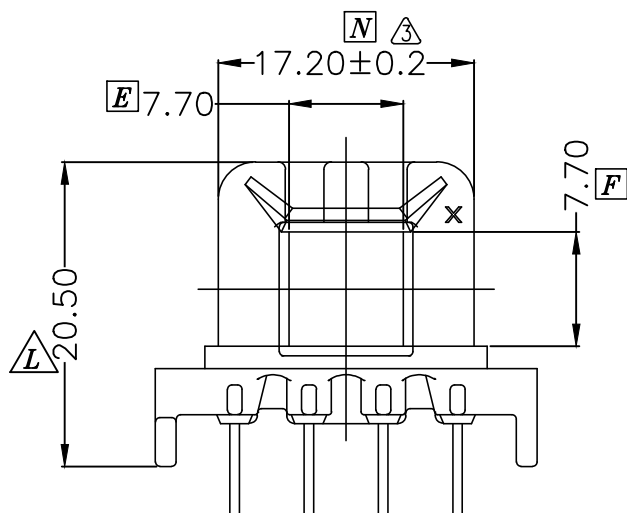


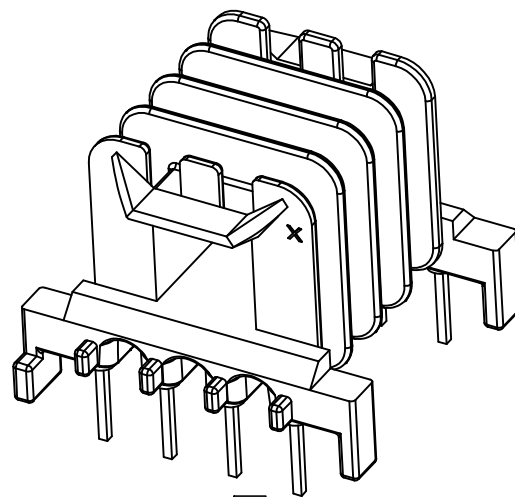

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	(L):20.6→20.5 (H1)8.9→9.0 (H):8.8→9.0			3	变更尺寸公差	△	2012.05.29
2	(E):7.6→7.7 (F):7.6→7.7 (L):20.6→20.5						
	(M):8.4→8.1 (U)3.3→3.4						

DRAWN & DRAFTED BY	Jl HUI	TOLERANCES	ANGLE: ±1°	TITLE: BOBBIN EF-25H(4 GROOVES)			
CHECKED & APPROVED BY		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	UNIT: MM	BOBBIN MATERIAL: PET (FR-530)		UL REC. UL 94V-0	
		pin pitch ±0.2	ORIGIN: DG	PIN MATERIAL: CP WIRE		PIN TENSION LOAD: 1.5KG MIN	
				DATE: MAR.05 '1998	DRAWING NO. P-2505	REV. 3	

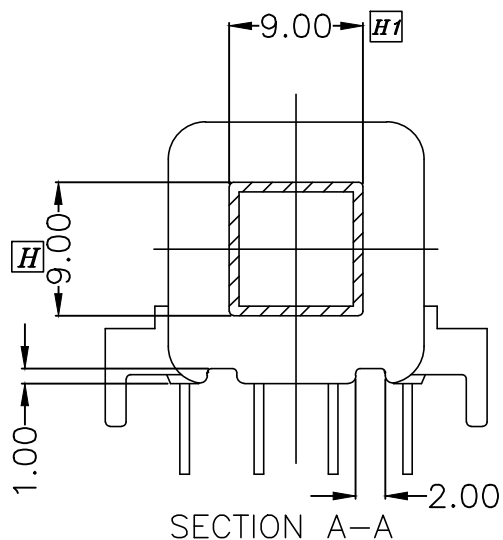

PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546

