
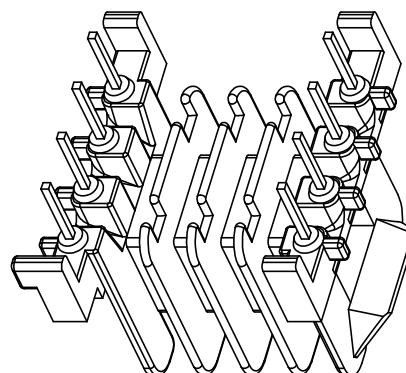
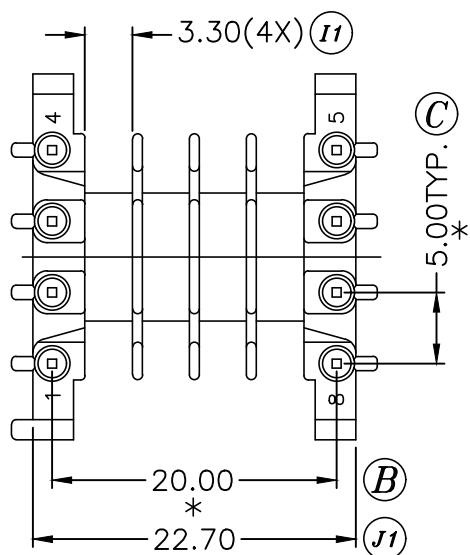
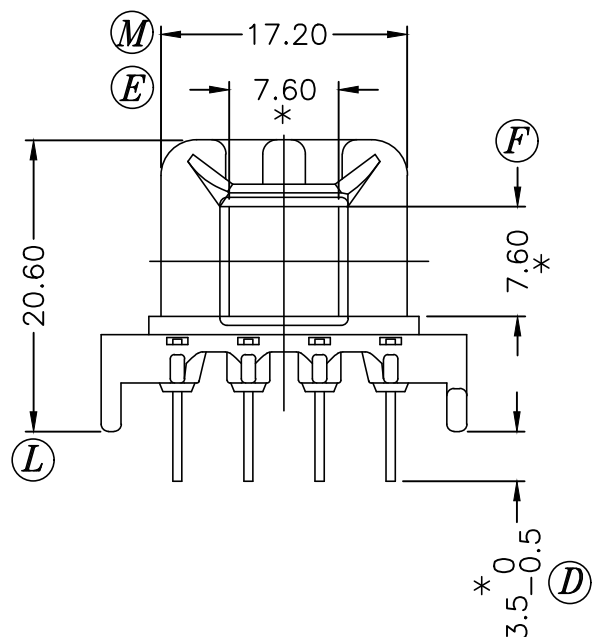
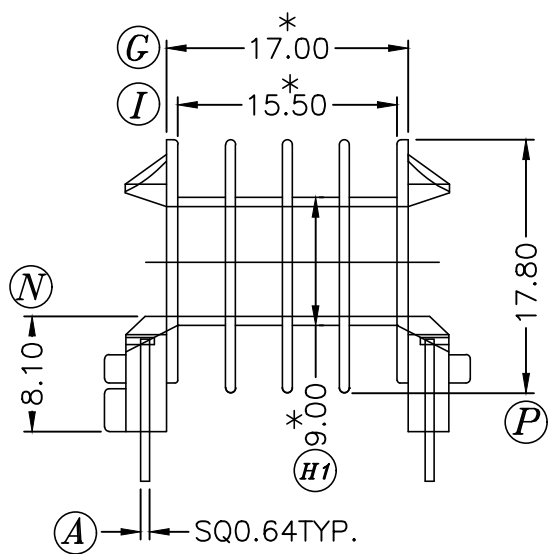
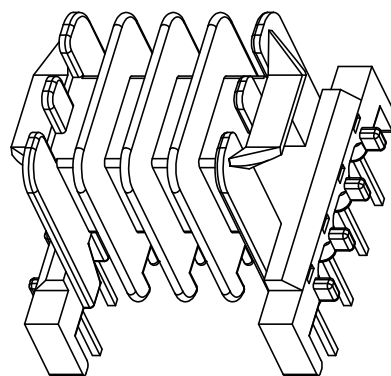
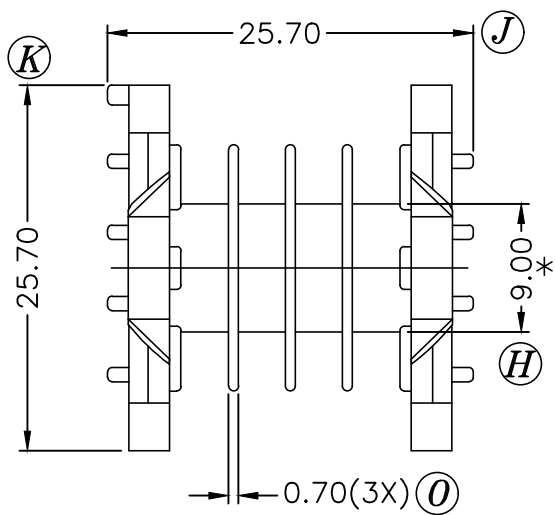




REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
5	UPDATE THE DRAWING.		'08.08.06				

DRAWN & DRAFTED BY	GU JINJU	TOLERANCES		ANGLE:	TITLE:		
		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	pin pitch ±0.2	UNIT:	T-H BOBBIN EF-25H(4 SEC)		
CHECKED & APPROVED BY				MM	BOBBIN MATERIAL: PET FR530	UL REC. UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN: SZ	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 2.0KG MIN	
					DATE: MAY.29 '2002	DRAWING NO. P-2505-1	REV. 5