

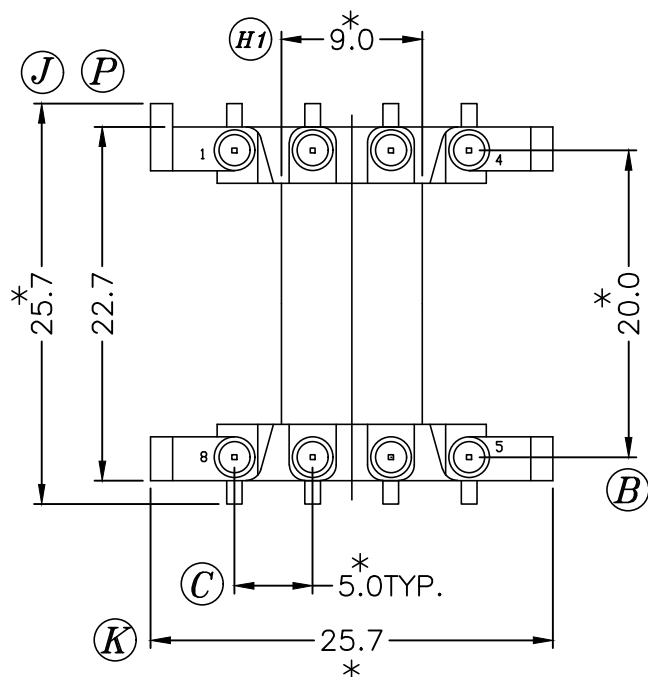
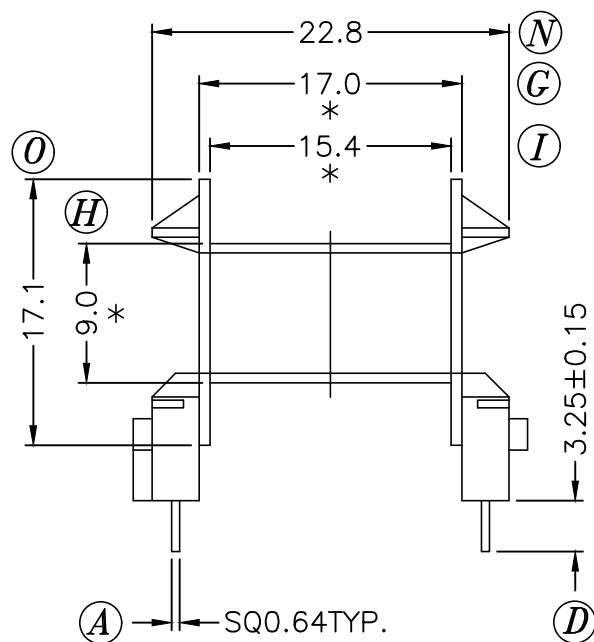


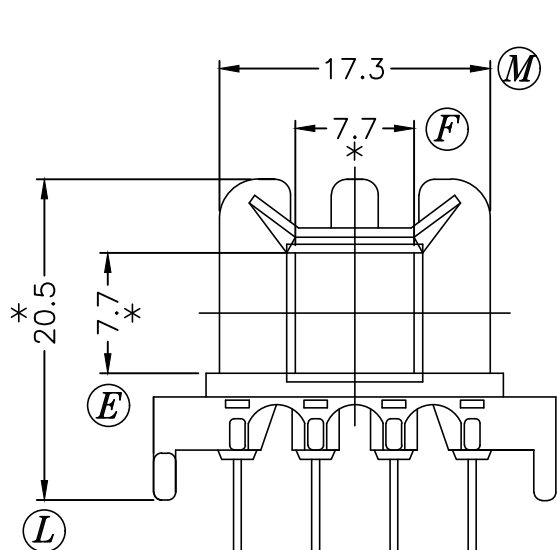

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(H):8.8->9.0 (H1):8.9->9.0		4	UPDATE THE DRAWING.	'09.03.17
2	(N):17.5->17.1 (P): 8.4->8.1	'96.01.27			
3	ADD THE EXHAUST HOTE.	'02.07.07			

DRAWN & DRAFTED BY	SHI ZHAORONG	TOLERANCES		ANGLE: ±1°	TITLE: T-H BOBBIN EF-25H		
CHECKED & APPROVED BY		0<L≤4 ±0.1	pin pitch ±0.2	UNIT: MM	BOBBIN MATERIAL: PET FR530	UL REC. UL 94V-0	
		4<L≤16 ±0.2					
		16<L≤63 ±0.3					
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN: SZ	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.5KG MIN	
					DATE: APR.07 '2003	DRAWING NO. P-2506	REV. 4



PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546

