
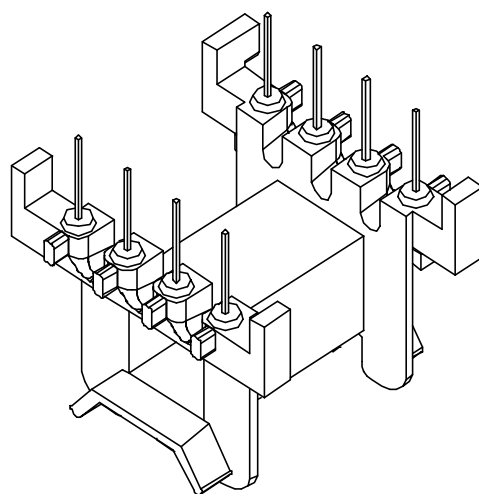
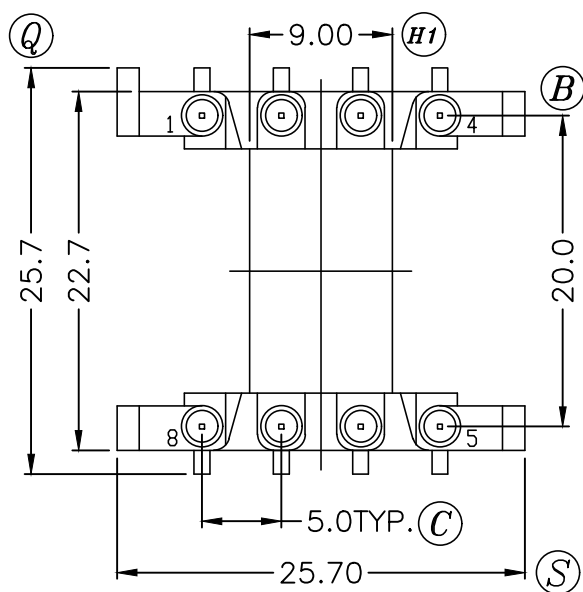
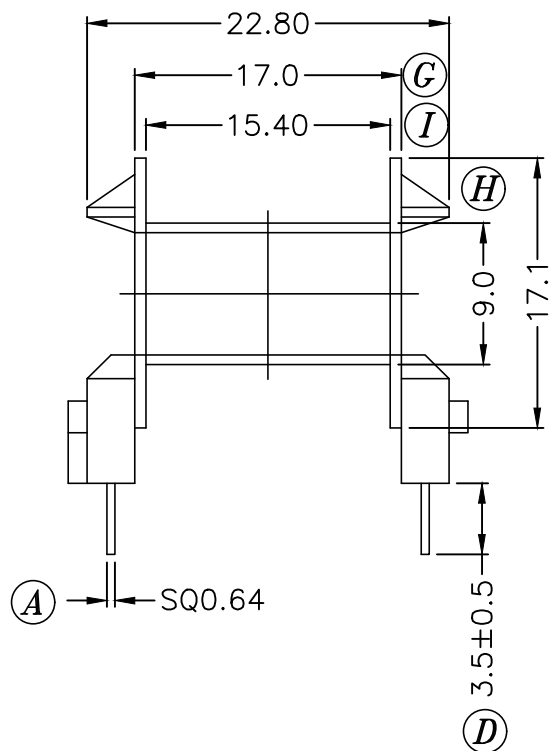


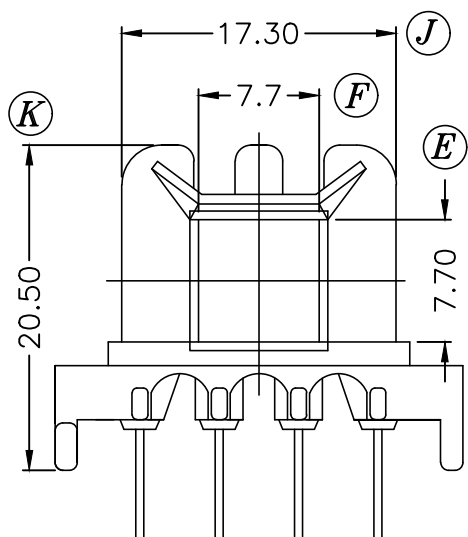

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(H):8.8->9.0 (H1):8.9->9.0		4	(H):8.8->9.0 (H1):8.9->9.0	
2	(N):17.5->17.1 (P): 8.4->8.1		5	CORRECT DRAWING	2007.09.27
3	ADD THE EXHAUST HOLE.				

DRAWN & DRAFTED BY	FENG DAN	TOLERANCES		ANGLE: $\pm 1^\circ$	TITLE: T-H BOBBIN EF-25H		
		$0 < L \leq 4 \pm 0.1$	pin pitch ± 0.2				
CHECKED & APPROVED BY		$4 < L \leq 16 \pm 0.2$			UNIT: MM	BOBBIN MATERIAL: PET FR530	UL REC. UL 94V-0
		$16 < L \leq 63 \pm 0.3$					
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546					ORIGIN: DG SZ	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.5KG MIN
						DATE: AUG.10'2004	DRAWING NO. P-2506