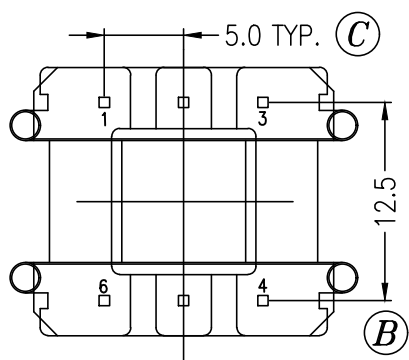
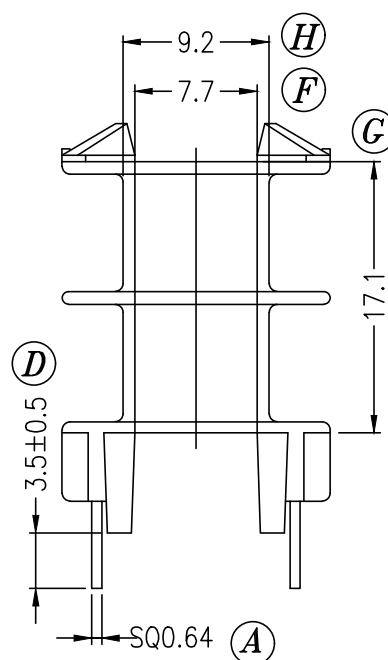
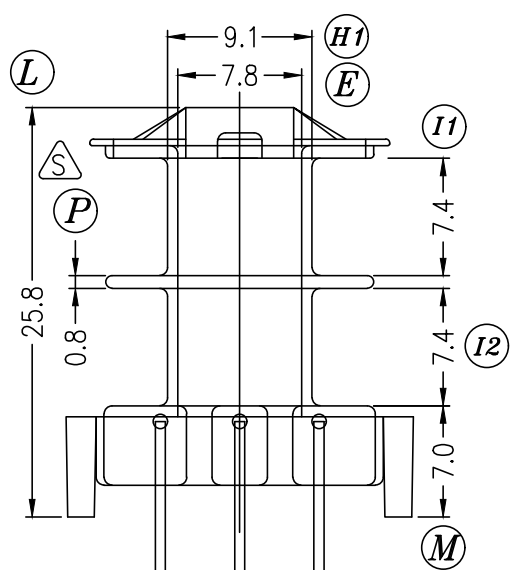

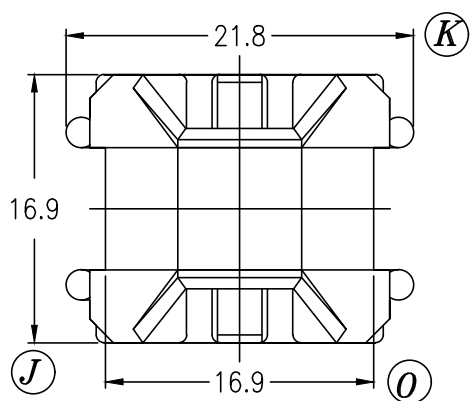



REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	△ SHAPE MODIFIED						
2	UPDATE DRAWING		'06.6.30				

DRAWN & DRAFTED BY	XIE SHU BO	TOLERANCES		ANGLE:	TITLE:			
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN EF-25 (2 GROOVES)			
CHECKED & APPROVED BY		4<L≤16 ±0.2		UNIT:	BOBBIN MATERIAL:		UL REC.	
		16<L≤63 ±0.3	MM	PET FR-530		UL 94V-0		
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:		PIN TENSION LOAD:	
				DG	CP WIRE		1.5KG MIN	
					DATE:	DRAWING NO.		REV.
					MAY.28'2000	P-2517		2