

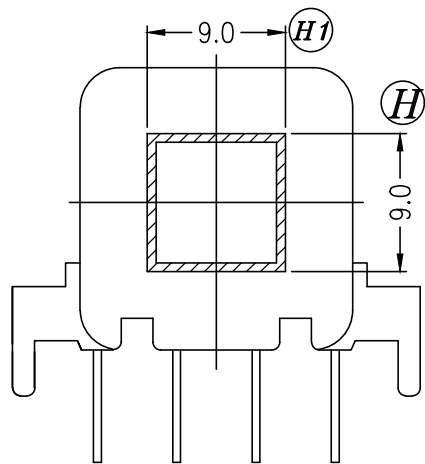
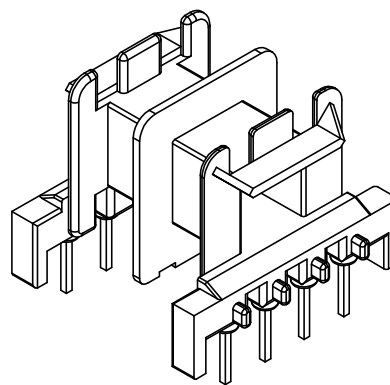
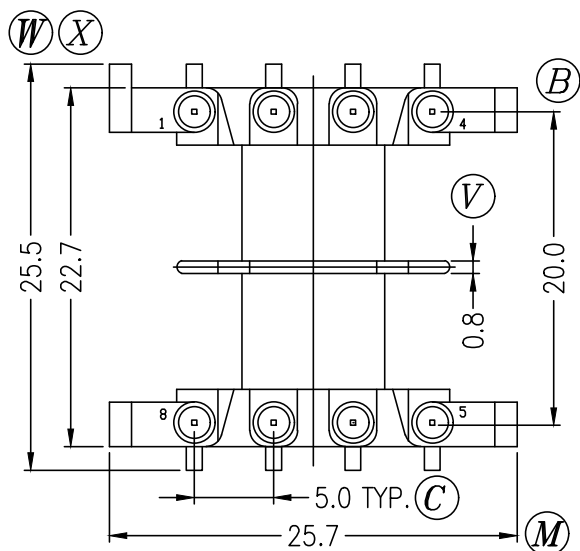
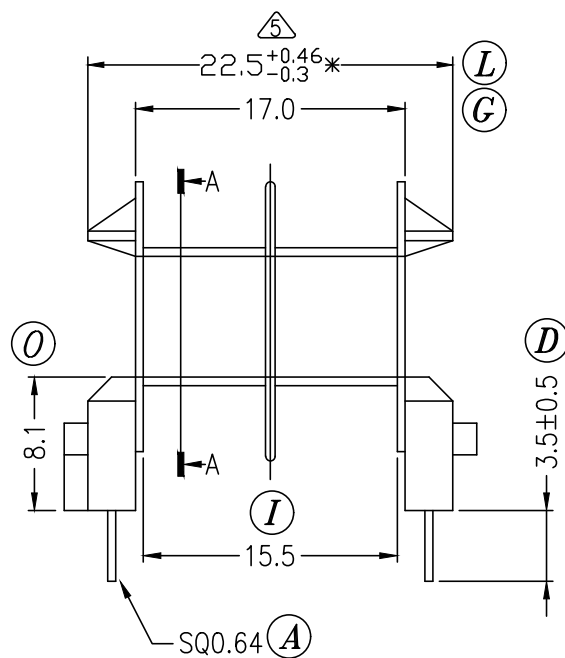


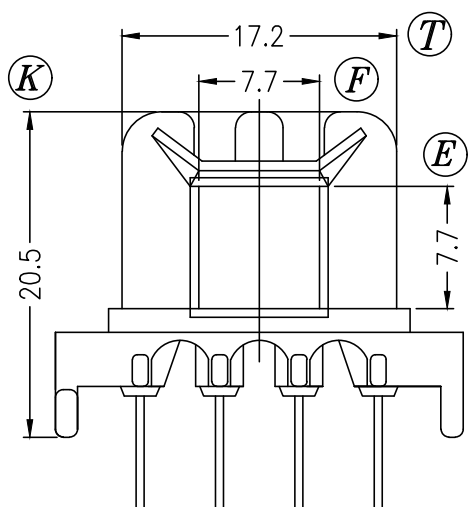

SEC.A-A

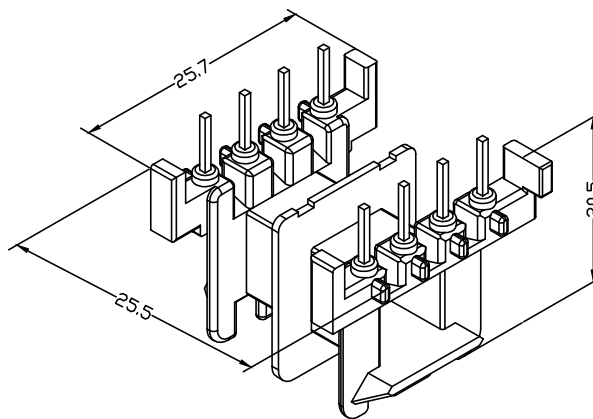

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
2	(K)20.6→20.5 (F)7.6→7.7 (E)7.5→7.7 (O8.1→8.1)			5	(L)22.5±0.3→22.5 ^{+0.46} / _{-0.3} (放宽公差) 5		09.04.21
3	(L)22.8→22.5						
4	(W)25.7→25.5						


DRAWN & DRAFTED BY	羅建權	TOLERANCES	ANGLE: ±1°	TITLE:	BOBIN EF-25H (2 GROOVES)		
CHECKED & APPROVED BY		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	UNIT: MM	BOBBIN MATERIAL:	PET(FR-530)		
		pin pitch ±0.2	ORIGIN: DG	PIN MATERIAL:	CP線		
				DATE:	MAY.26 2000	DRAWING NO.	P-2518
						REV.	5



PIN SHINE INDUSTRIAL CO., LTD.

TEL:886-2-22990545

FAX:886-2-22990546



DATE: MAY.26 2000

DRAWING NO.

P-2518

REV. 5