
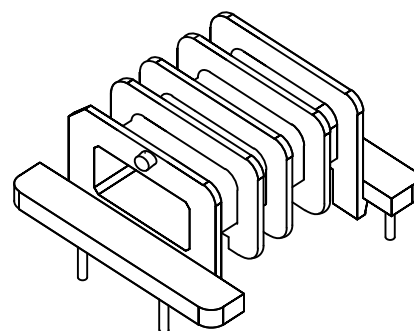
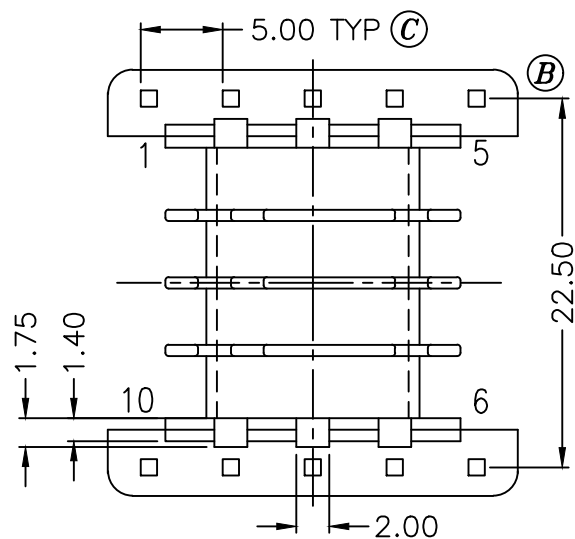
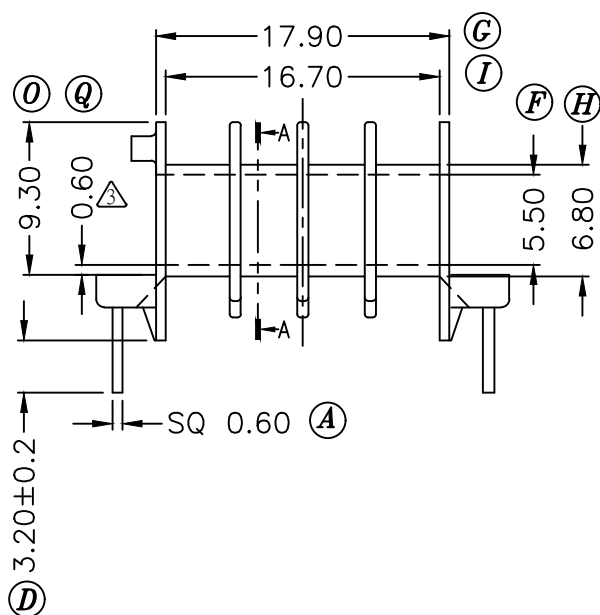
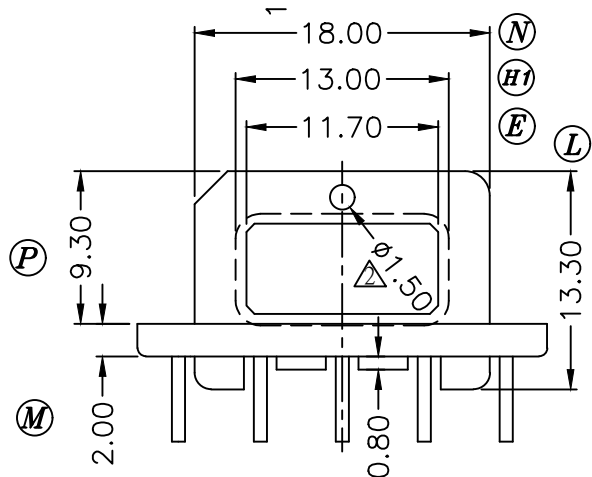
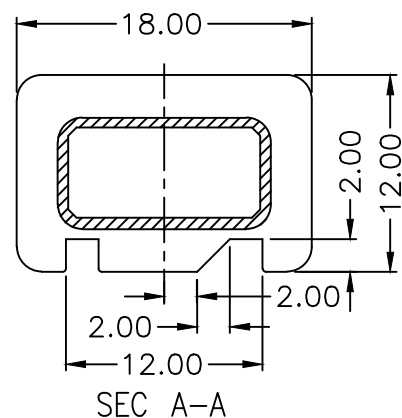


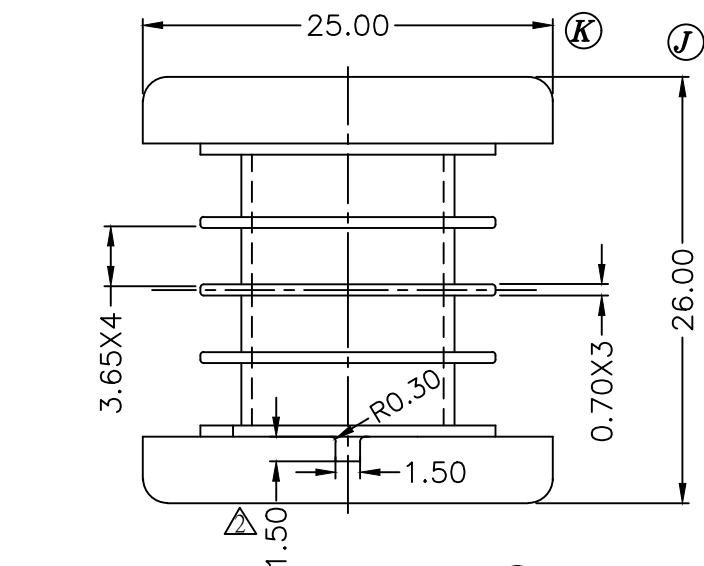

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	PIN針由全插改為1,3,5,8,10不插.	'06.04.17			
2	加防呆膠位 Δ	'08.04.28			
3	增加尺寸標注"Q" Δ	'08.10.29			

DRAWN & DRAFTED BY	SANG SUI CHAO	TOLERANCES		ANGLE: $\pm 1^\circ$	TITLE: BOBBIN EFD-25		
		$0 < L \leq 4 \quad \pm 0.1$ $4 < L \leq 16 \quad \pm 0.2$ $16 < L \leq 63 \quad \pm 0.3$	pin pitch ± 0.2				
CHECKED & APPROVED BY				UNIT: MM	BOBBIN MATERIAL: PHENOLIC(PM-9820)	UL REC. UL 94V-0	
				ORIGIN: DG	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.5KG MIN	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546					DATE: JUL.30 '2004	DRAWING NO. P-2526-1	REV. 3