
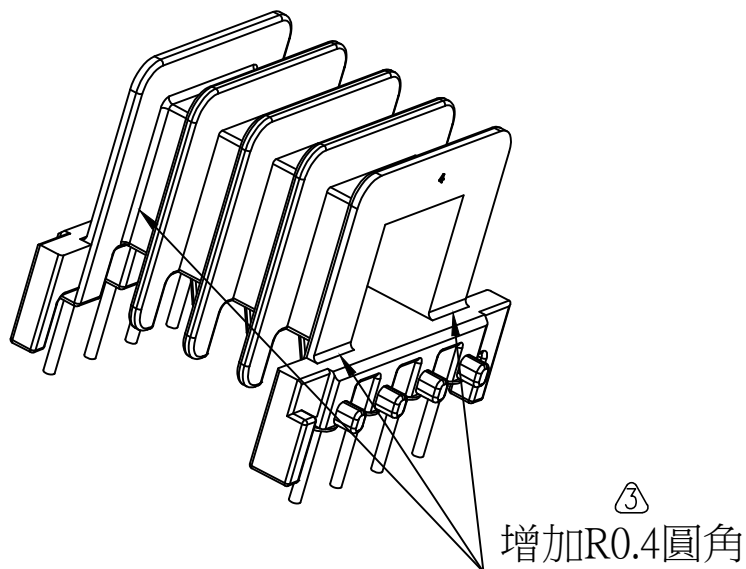
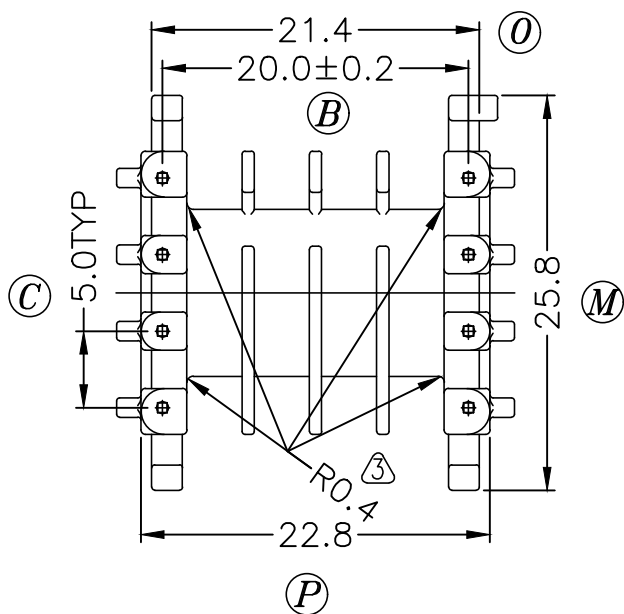
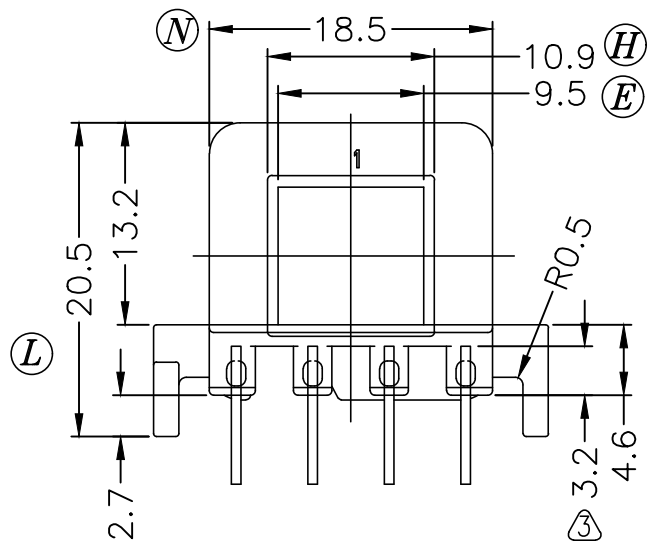
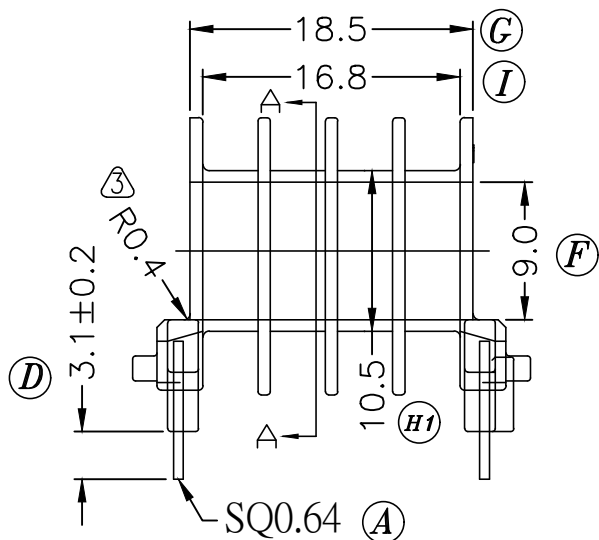
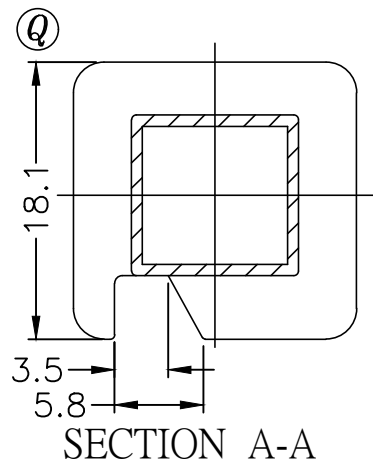


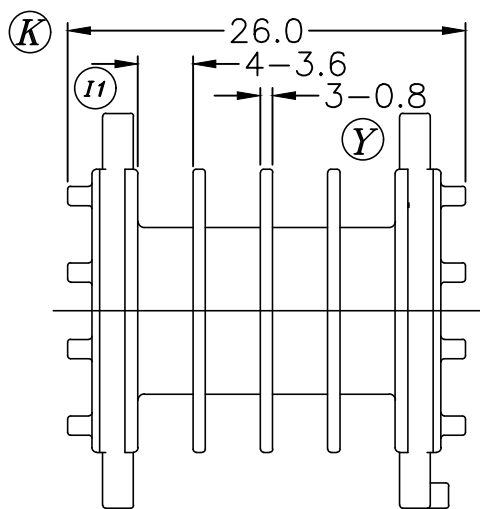

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	① 23.8-->22.8	06'02.18			
2	② 3.5-->5.8	06'03.28			
3	增加R0.4圓角,插PIN深度改到3.2 ③				

DRAWN & DRAFTED BY	liu chao long	TOLERANCES		ANGLE: $\pm 1^\circ$	TITLE: BOBBIN EV25/13 (4 GROOVES)		
		0<L≤4 ±0.1	pin pitch ±0.2		BOBBIN MATERIAL: PET (FR-530)NC		UL REC. UL 94V-0
CHECKED & APPROVED BY	JOHN RONG	4<L≤16 ±0.2		UNIT: MM	PIN MATERIAL: CP WIRE		PIN TENSION LOAD: 1.5Kg
		16<L≤63 ±0.3	ORIGIN: DG		DATE: OCT.10.2005	DRAWING NO. P-2532-2	REV. 3
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546							