
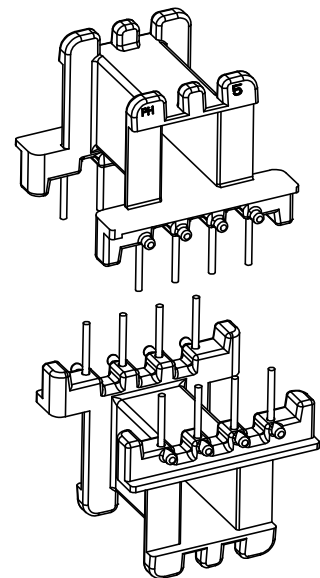
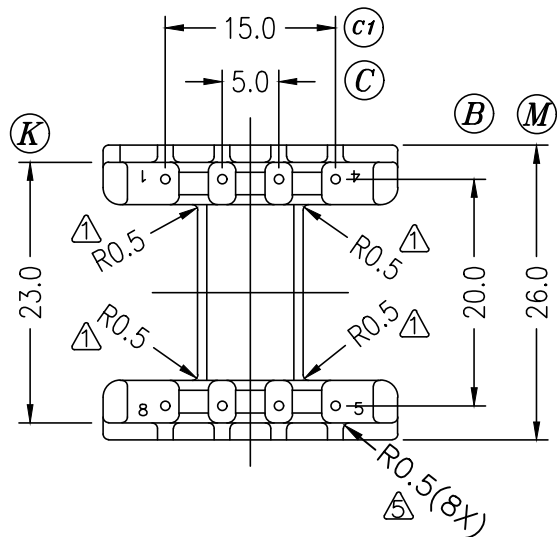
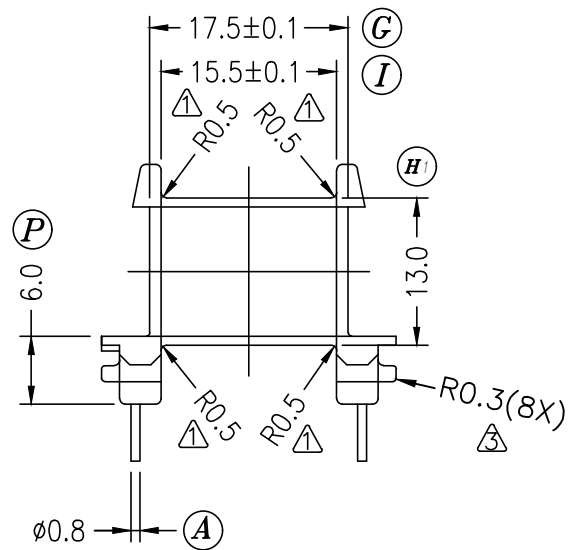
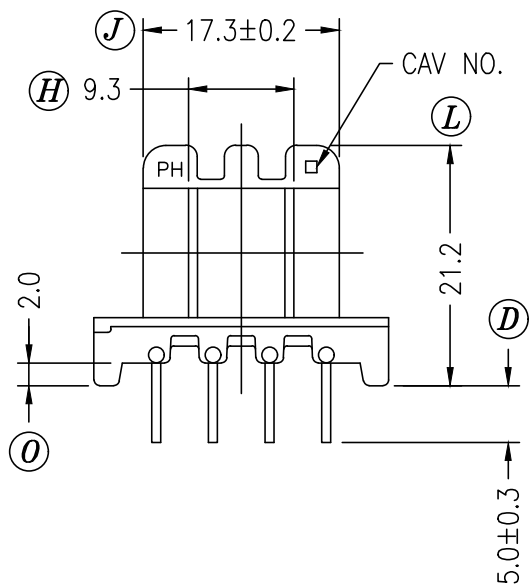
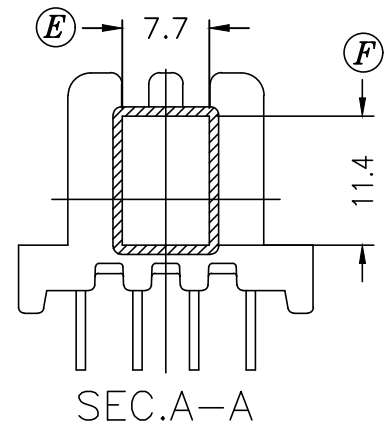


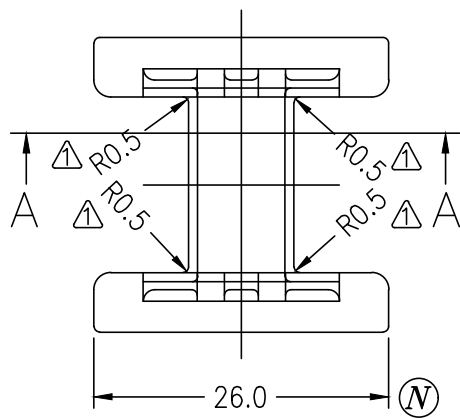

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	繞線管四周加0.5mm之R角,標記			4	增加材質T375HF		07/02/'14
2	J:17.3->17.3±0.2		11/19/'04	5	R角設變, 詳見		09/17/'16
3	標記(3)處增加R角.		05/27/'05				

DRAWN & DRAFTED BY	YUE JUN XINA	TOLERANCES		ANGLE:	TITLE: EF25		
		0<L≤4 ±0.1	pin pitch ±0.2	UNIT:			
CHECKED & APPROVED BY		4<L≤16 ±0.2		MM	BOBBIN MATERIAL:	UL REC.	
		16<L≤63 ±0.3			PM-9820/T375HF	UL 94V-0	
PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				SZ	CP WIRE	1.5KG MIN	
					DATE:	DRAWING NO.	REV.
					09.17 '2016	P-2538	5