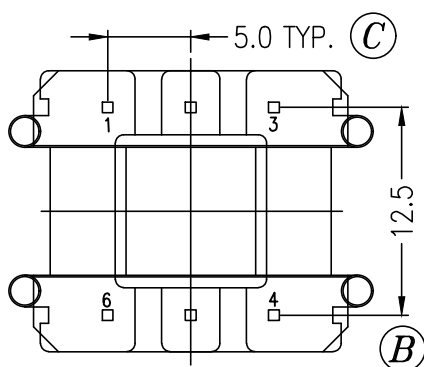
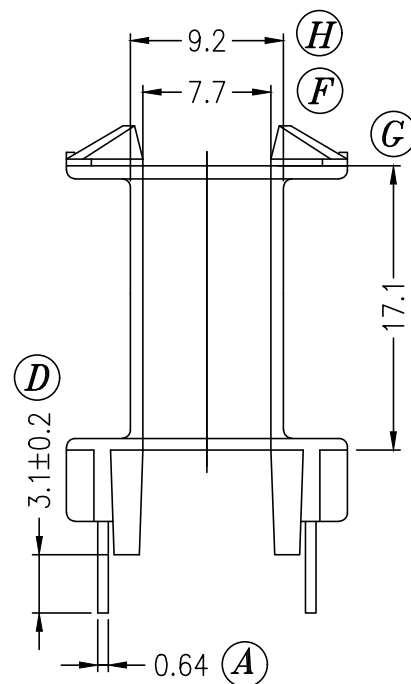
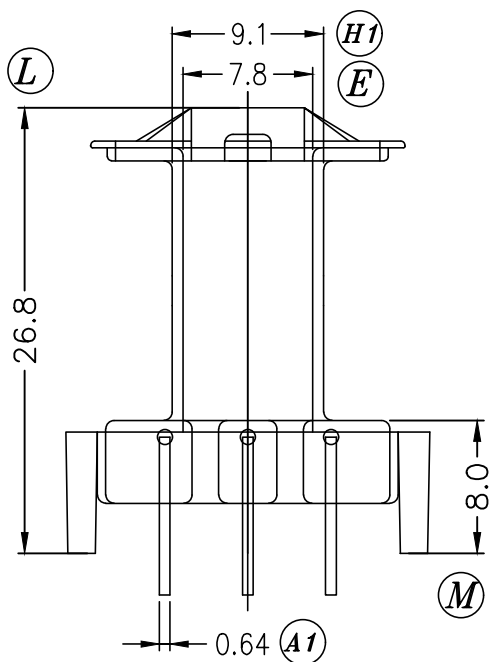
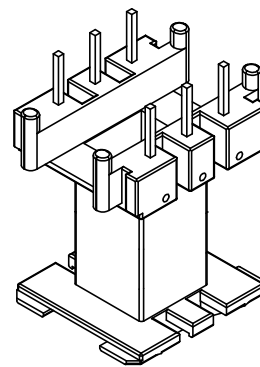
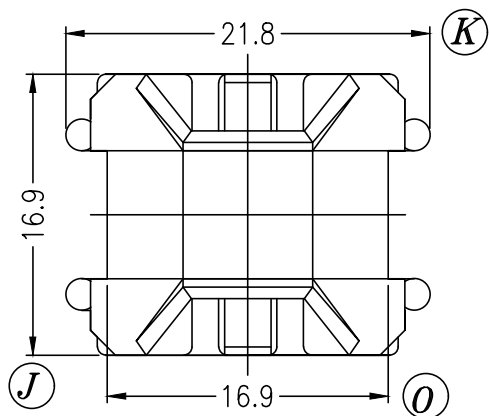



REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	DIM (M)7.0--->8.0MM; (L)25.8--->26.8MM.		04.6.24				

DRAWN & DRAFTED BY	YE JIN HONG	TOLERANCES		ANGLE:	TITLE:		
		$0<L\leq 4 \pm 0.1$	pin pitch	$\pm 1^\circ$	BOBBIN EF-25		
CHECKED & APPROVED BY	BEN LEE	$4<L\leq 16 \pm 0.2$	± 0.2	UNIT:	BOBBIN MATERIAL:	UL REC.	
		$16<L\leq 63 \pm 0.3$		MM	PET (FR-530)	UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				DG	CP WIRE	1.5KG MIN	
					DATE:	DRAWING NO.	REV.
				AUG.26 2003	P-2553	1	