

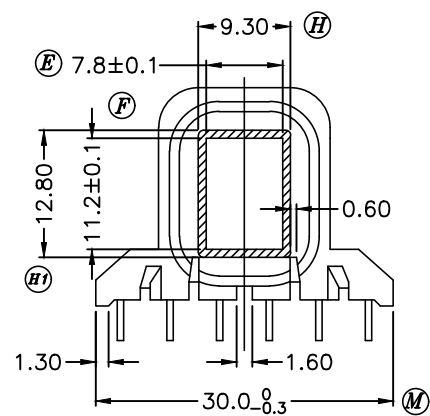
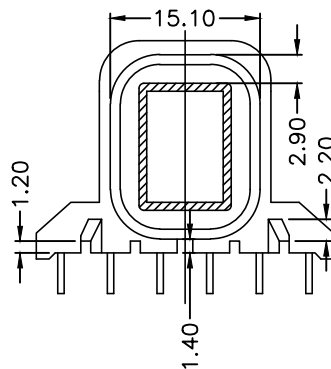
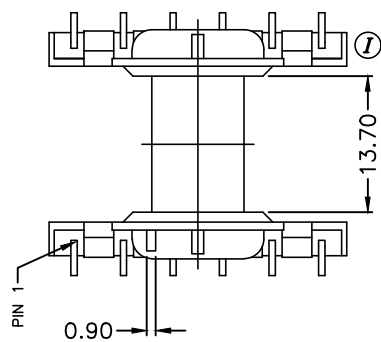
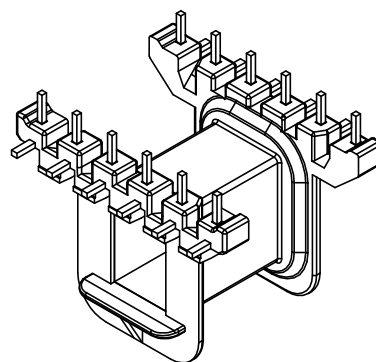
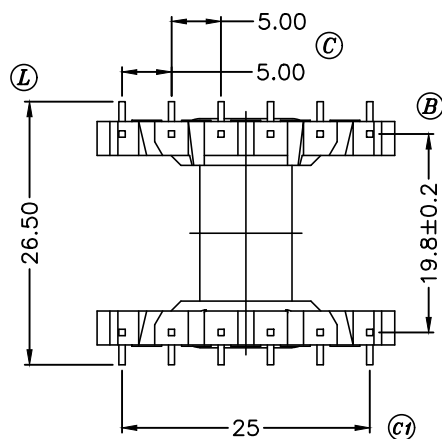


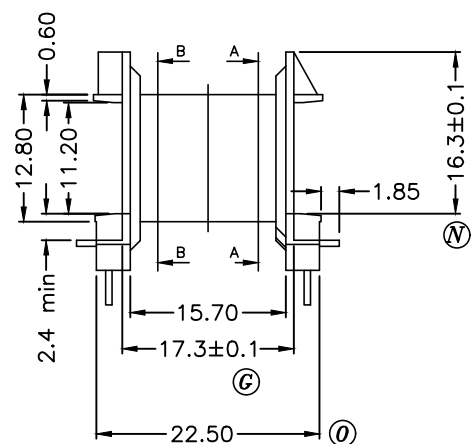


SECTION B-B

SECTION A-A

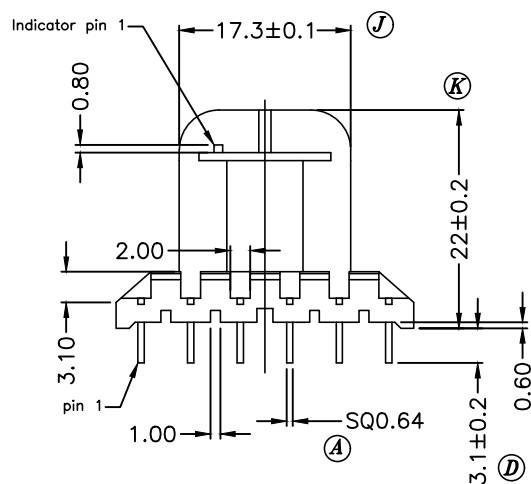

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	CHANGE MATERIAL:PET R530-->PET 4410 G6.	'04.12.17			

DRAWN & DRAFTED BY	YE JIN HONG	TOLERANCES		ANGLE: $\pm 1^\circ$	TITLE: T-H BOBBIN EF25/11			
		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	pin pitch ±0.2		UNIT: MM	BOBBIN MATERIAL: PET 4410 G6	UL REC. UL 94V-0	
CHECKED & APPROVED BY	JOHN RONG				ORIGIN: DG	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.2KG MIN	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546						DATE: DEC.10'2004	DRAWING NO. P-2567	REV. 1