

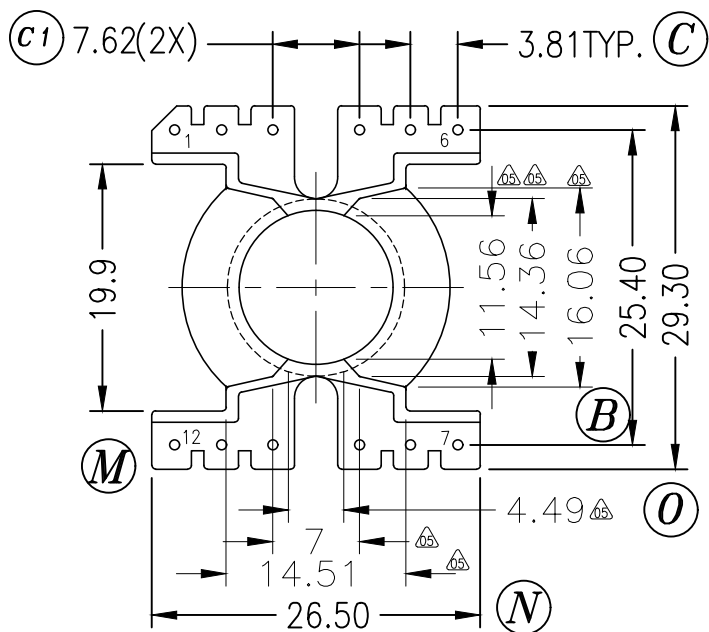
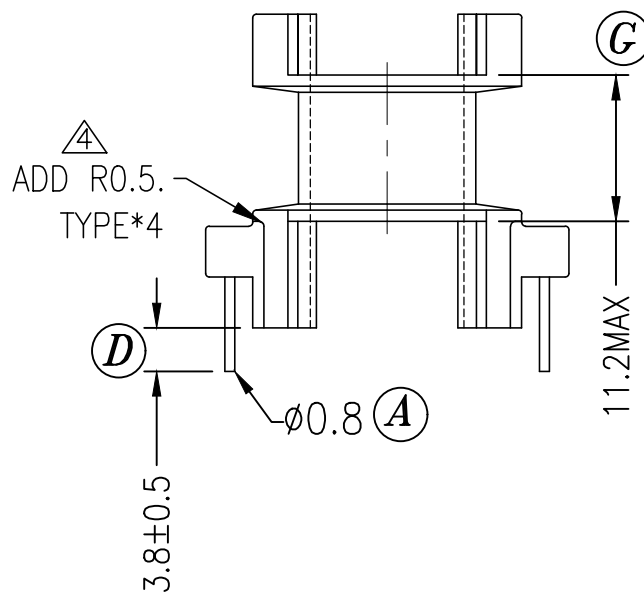
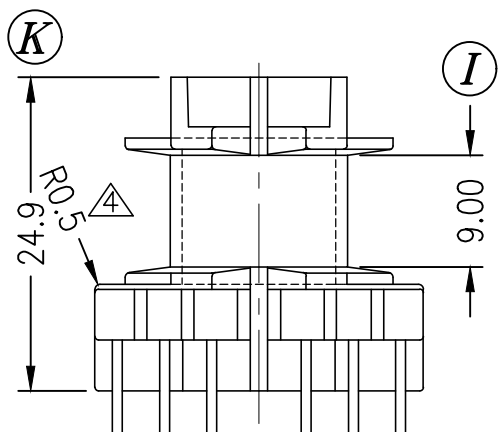


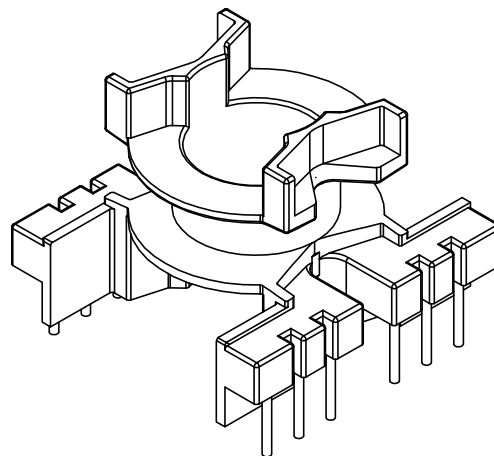

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	(G):11.8-> 11.2 MAX		02.4.05	4	△ R0.5.TYPE*4.		04.4.16
2	(L):25.3-> 24.9		03.4.15	5	變更鉄芯裝配尺寸.△		13.9.18
3	CANCEL (L); UPDATE DRAWING.		03.7.20	6	新增材質T375J HF △		16.1.14

DRAWN & DRAFTED BY	QIN MENG	TOLERANCES	ANGLE: $\pm 1^\circ$	TITLE: T-H BOBBIN PQ-26X20			
CHECKED & APPROVED BY		$0 < L \leq 4 \pm 0.1$ $4 < L \leq 16 \pm 0.2$ $16 < L \leq 63 \pm 0.3$	PIN PITCH ± 0.2	UNIT: MM	BOBBIN MATERIAL: PHENOLIC PM9820 / T375J HF △	UL REC. UL 94V-0	
ORIGIN: DG				PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 1.5KG MIN		
DATE: APR.07 '2003				DRAWING NO. P-2602		REV. 6	

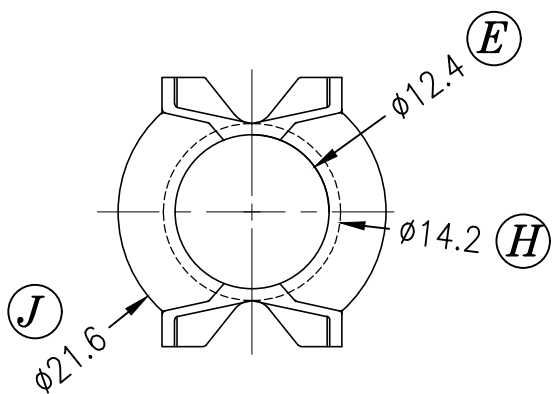

PIN SHINE INDUSTRIAL CO., LTD.
TEL: 886-2-22990545 FAX: 886-2-22990546