


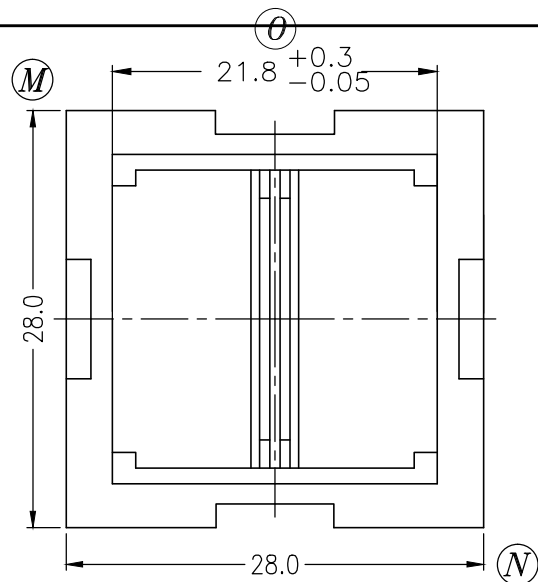
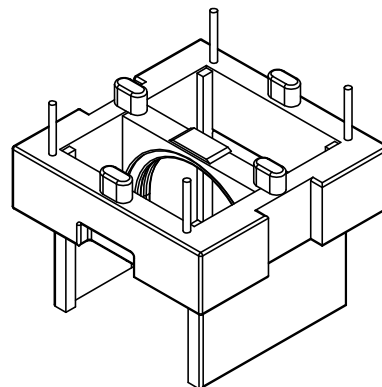
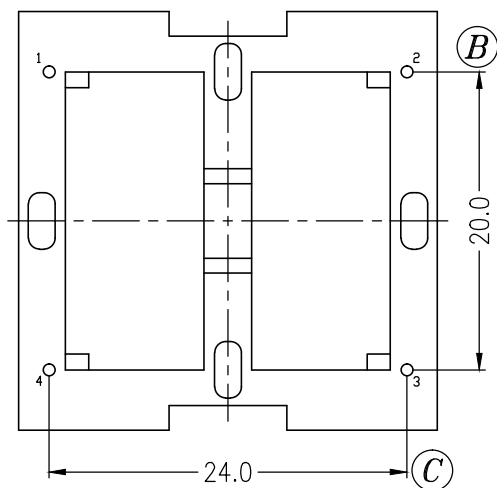
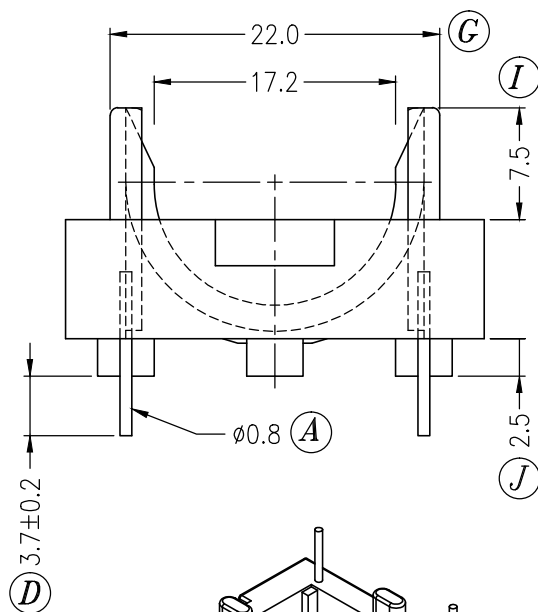


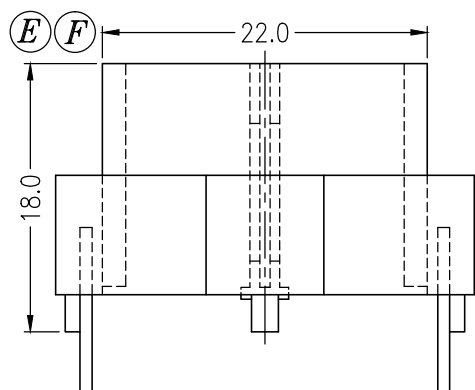

PART P-2802



REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	(P):8.0->8.5 (O):7.5->7.0			4	CANCEL: (L) (Q) (P) (K) (H) ; UPDATE DRAWING		06.02.17
2	(P):8.5->8.0(O):7.0->7.5(N):21.8->22.0(G):21.8->22.0						
3	MATERIAL CHANGED FROM T357 TO T375J						

DRAWN & DRAFTED BY	LIU YUANBIN	TOLERANCES		ANGLE: ± 1°	TITLE: ET-28H (BASE)			
		0<L ≤4 ±0.1 4<L ≤16 ±0.2 16<L ≤63 ±0.3	pin pitch ±0.2					
CHECKED & APPROVED BY	JOHN RONG				UNIT: MM	BOBBIN MATERIAL: PHENOLIC (T375J)	UL REC. UL 94V-0	
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546					ORIGIN: ZZ	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 2.0KG MIN	
						DATE: NOV.30 2000	DRAWING NO. P-2804	REV. 4