
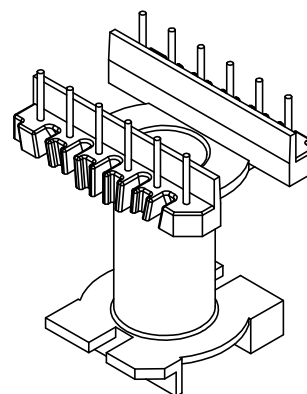
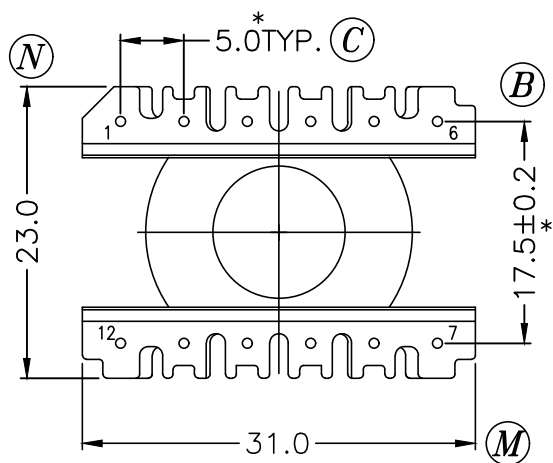
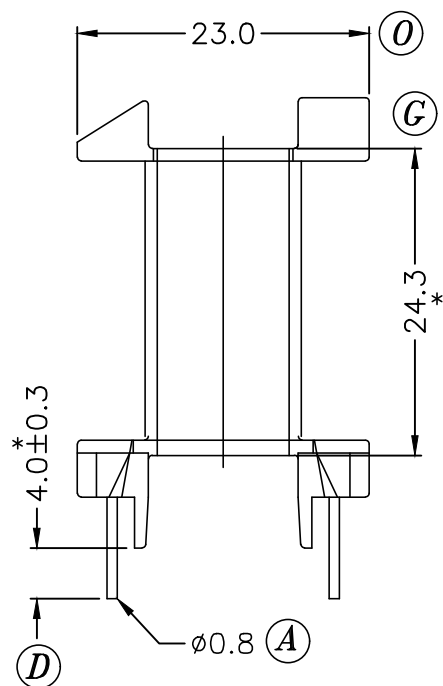
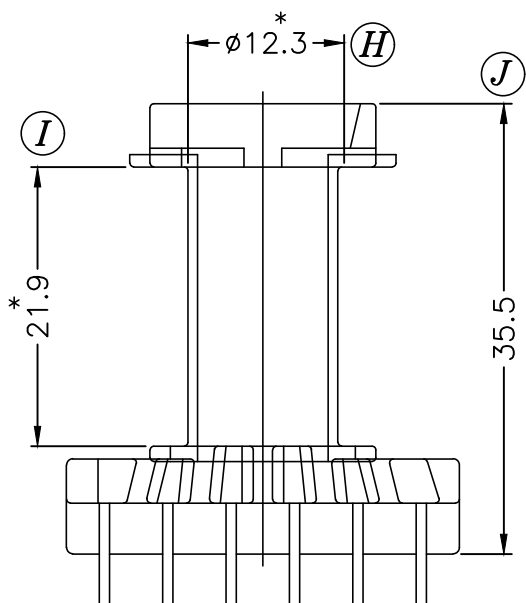
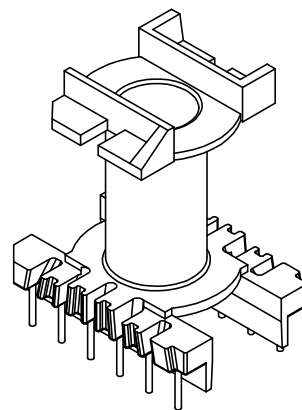


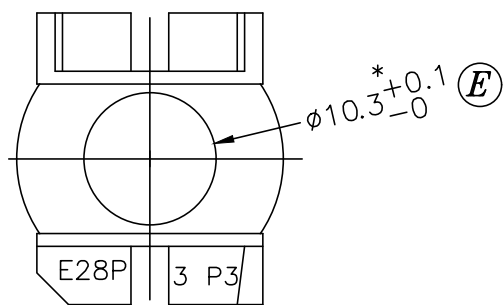

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(E): $\phi 10.4 \rightarrow \phi 10.3$; (H): $\phi 12.4 \rightarrow \phi 12.3$; (I): $22.0 \rightarrow 21.9$; (K): $5.0 \rightarrow 5.1$		3	CANCEL (K),(L),(P); UPDATE THE DRAWING.	
2	(E): $\phi 10.3 \rightarrow \phi 10.3 + 0.1 / - 0$; (B): $17.5 \rightarrow 17.5 \pm 0.2$		4	增加刻字	1/28-11

DRAWN & DRAFTED BY	ZHOUXIAOGANG	TOLERANCES	ANGLE: $\pm 1^\circ$	TITLE: T-H BOBBIN BP-E28P	
CHECKED & APPROVED BY		$0 < L \leq 4 \quad \pm 0.1$ $4 < L \leq 16 \quad \pm 0.2$ $16 < L \leq 63 \quad \pm 0.3$	UNIT: MM	BOBBIN MATERIAL: CP-J-8800 PM9820	UL REC. UL 94V-0
			ORIGIN: DG SZ	PIN MATERIAL: CP WIRE	PIN TENSION LOAD: 2.0KG MIN
			DATE: JAN.28 '2011	DRAWING NO. P-2817	REV. 4