

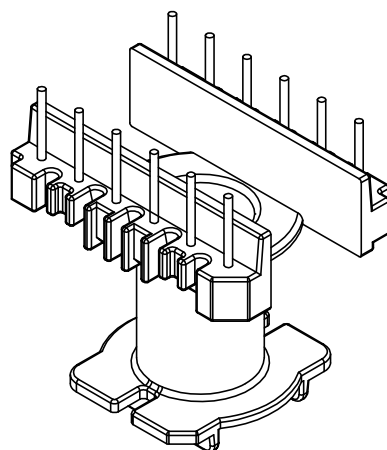
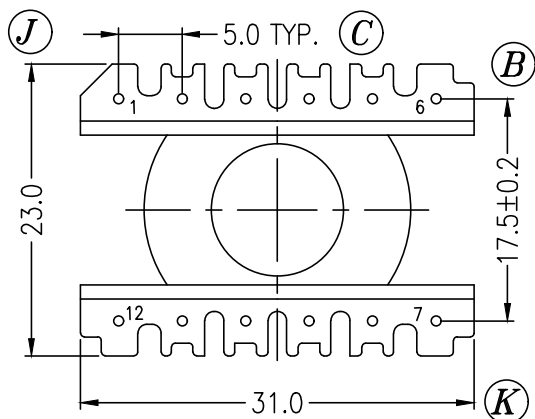
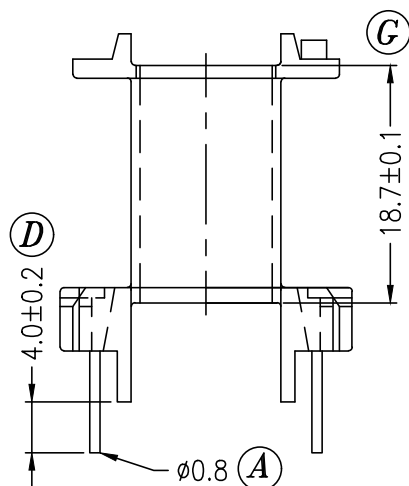
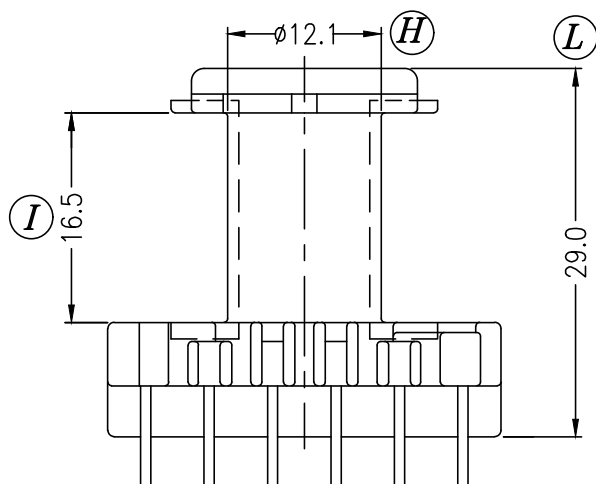


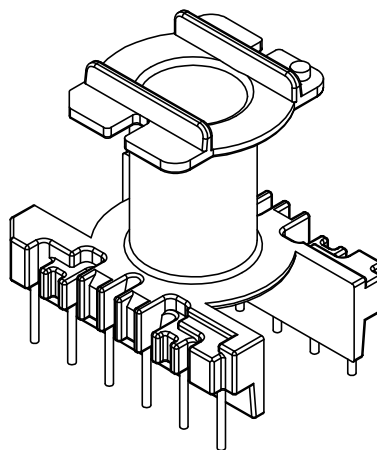

REV.	REVISIONS REC.	DATE	REV.	REVISIONS REC.	DATE
1	(D):4.0±0.3→4.0±0.2 (E): ϕ 10.4→ ϕ 10.3		3	UPDATE DRAWING.	'03.3.20
	(H1): ϕ 12.4→ ϕ 12.1		4	CANCEL:(K),(L),(P);UPDATE DRAWING.	'03.5.15
2	(c):5.0→5.0±0.1;(B)17.5→17.5±0.2;(10.3→10.3+0.1/-0;(G)18.7→18.7±0.1				

DRAWN & DRAFTED BY	YANGJ	TOLERANCES	ANGLE:	TITLE:
CHECKED & APPROVED BY	JOHN RONG	0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	±1°	BOBBIN BP-E28P
		PIN PITCH ±0.2	UNIT: MM	BOBBIN MATERIAL: PHENOLIC (PM-9820) UL REC. UL 94V-0
			ORIGIN: DG	PIN MATERIAL: CP WIRE PIN TENSION LOAD: 2.0KG MIN
				DATE: MAR.26 '1998 DRAWING NO. P-2818 REV. 4

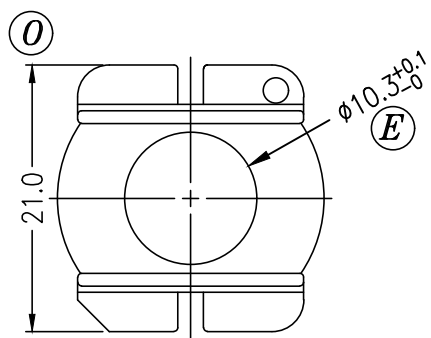

PIN SHINE INDUSTRIAL CO.,LTD.

TEL:886-2-22990545

FAX:886-2-22990546

