
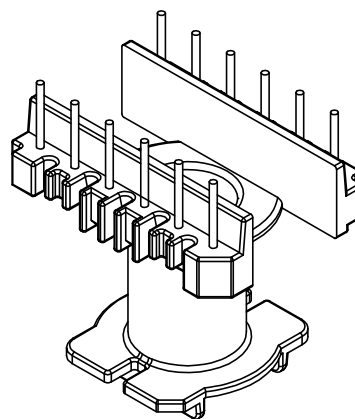
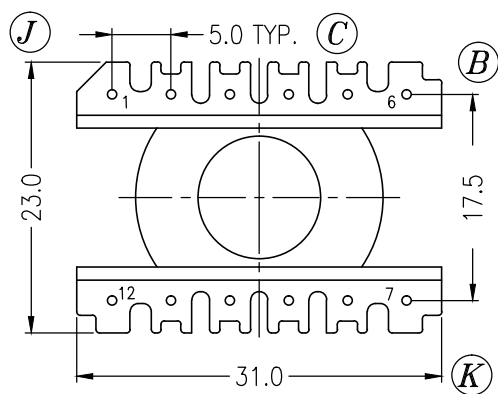
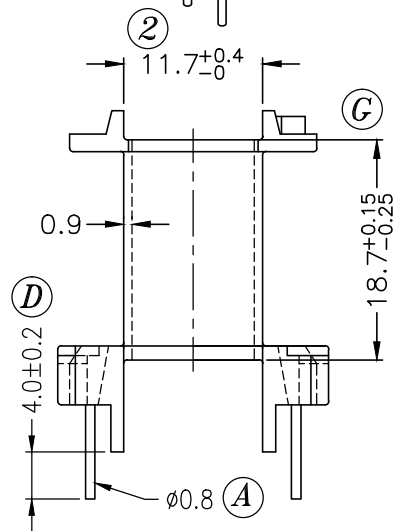
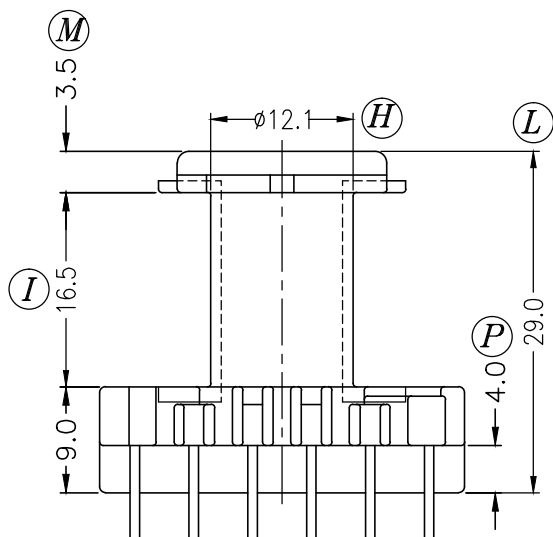
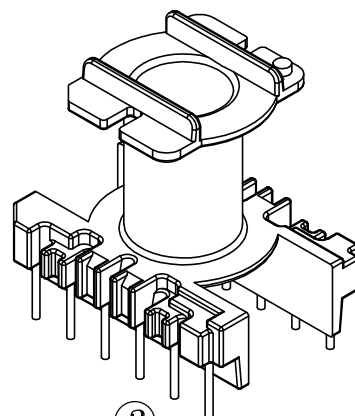


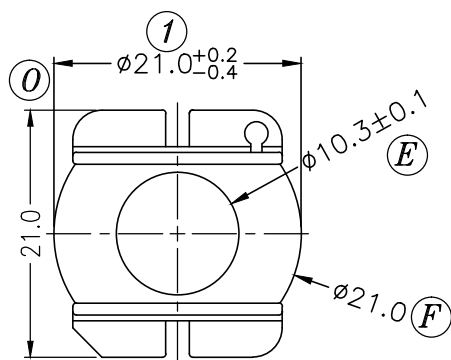

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	①② ③ 修改公差			5	(E):10.3+0.1/-0.1->10.3±0.1		
4	顶部的凸点与挡墙连接起来，铁芯长度由18.7±0.1改为18.7+0.15/-0.25，壁厚由0.9±0.05改为0.9						

DRAWN & DRAFTED BY	LIU YOU SEN	TOLERANCES		ANGLE:	TITLE:		
		$0<L\leq 4 \pm 0.1$	pin pitch ± 0.2	$\pm 1^\circ$	BOBBIN BP-E28P		
CHECKED & APPROVED BY		$4<L\leq 16 \pm 0.2$		UNIT:	BOBBIN MATERIAL:	UL REC.	
		$16<L\leq 63 \pm 0.3$	MM	PHENOLIC (PM-9820)	UL 94V-0		
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:+86-596-7880558 FAX:+86-596-7880556				ORIGIN:	PIN MATERIAL:	PIN TENSION LOAD:	
				ZZ	CP WIRE	2.0KG MIN	
					DATE:	DRAWING NO.	REV.
					AUG.28.2003	P-2818	5