

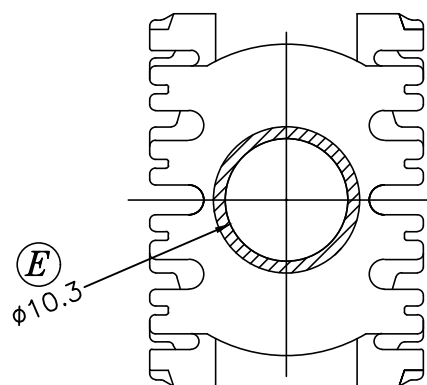
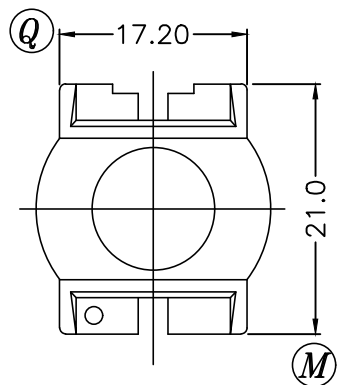

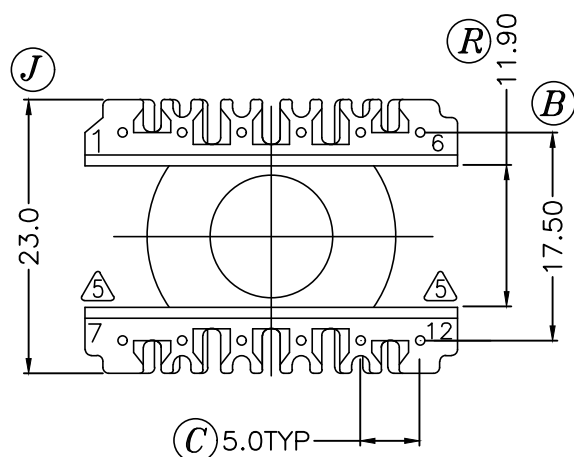


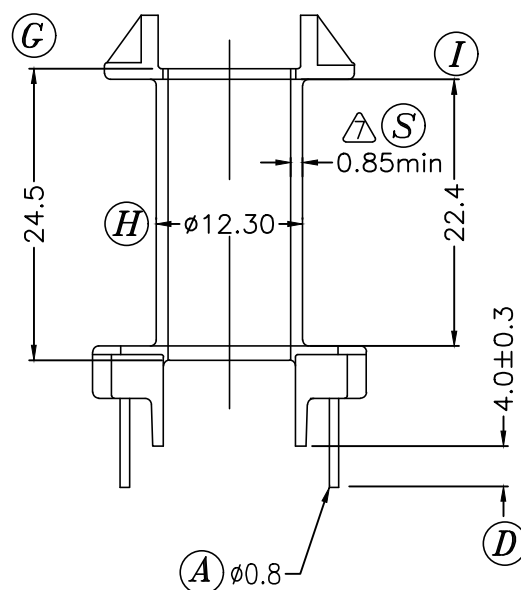

SEC. A--A

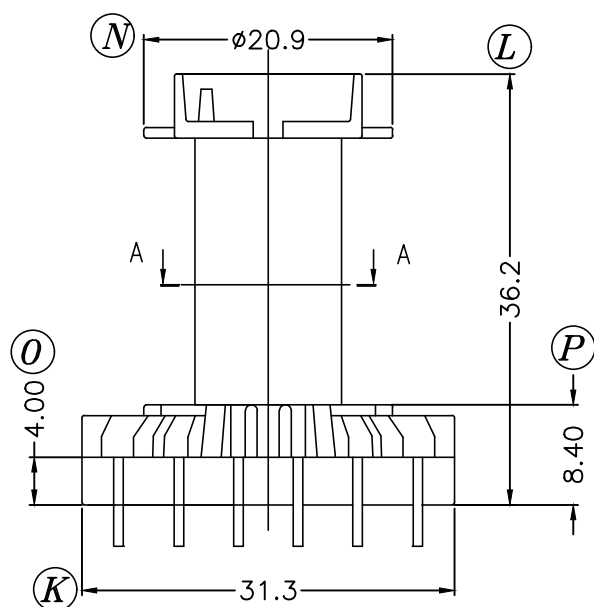

REV.	REVISIONS	REC.	DATE	REV.	REVISIONS	REC.	DATE
1	修改規格公差,加大點尺寸.		'04.11.18	5	依實物修改腳位號標示由1~12順時針方向數,變更為"Z"形數法.		'08.11.03
2	增加繞線管壁厚標示.		'05.09.10	6	增加材質.		'16.11.08
3	增加尺寸(Q),(M)		'08.03.25	7	修改尺寸管控.		'18.12.11
4	根據實物修改圖面尺(Q),15.75-->17.20MM		'08.04.10				

DRAWN & DRAFTED BY	YE ZHAN CHAO	TOLERANCES		ANGLE: ±1°	TITLE: T-H BOBBIN EER28L			
		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	pin pitch ±0.2		BOBBIN MATERIAL: PM 9820/T375J		UL REC. UL 94V-0	
CHECKED & APPROVED BY					UNIT: MM	PIN MATERIAL: CP WIRE		PIN TENSION LOAD: 2.0kg MIN.
 PIN SHINE INDUSTRIAL CO.,LTD. TEL:886-2-22990545 FAX:886-2-22990546					ORIGIN: DG			
						DATE: JUL 29'1999	DRAWING NO. P-2821	REV. 7